

CRI > 90

DIRO TRIMLESS LED SOFT

NEW COLOR B

2700 K SOFT DM

LED 10W / 565lm / 650mA



REFL WFL 40°

6 202 144 1902 ◊  
◊ = B / MMAT / W

NON ADJUSTABLE

0.7 IP20 DAMP  
IP23

REQUIREMENTS  
ROUGH-IN

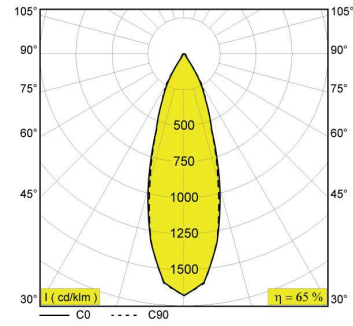

<sup>(1)</sup>Values based on 2700K 40° White finish

**Application**

Finishing section to be used with DELTA LIGHT® rough-in requirements

**Ceiling Thickness**

For 5/8" ceiling standard up to 7/8"

**Color Finish**

B - Black  
W - White  
MMAT - Gold Mat

**Light Source**

One 9,5W LED module included

**Delivered Lumens**

565lm at 2700K<sup>(1)</sup>

**Power Supply**

Included in rough-in requirements.

**Connector**


Rough-in and trim connection through pre-installed snap-in connector

**Specification features**

Body fabricated of surface treated aluminum  
Pre-installed springs for easy installation  
Suitable for dry and damp locations

**Dimensions**

Height: 98mm = 3"-7/8  
Diameter: Ø81,5mm = 3"-3/16  
Ceiling Cut out: Ø82 mm = 3"-1/4

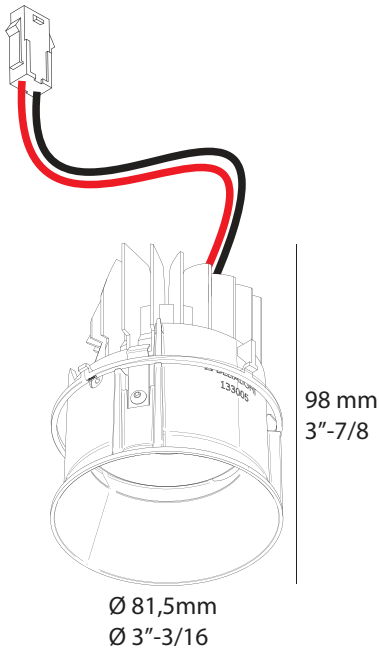

**PROJECT INFO**

Date

---

Client

---


Project Name

---

Type/Quantity

---

# ROUGH-IN REQUIREMENTS

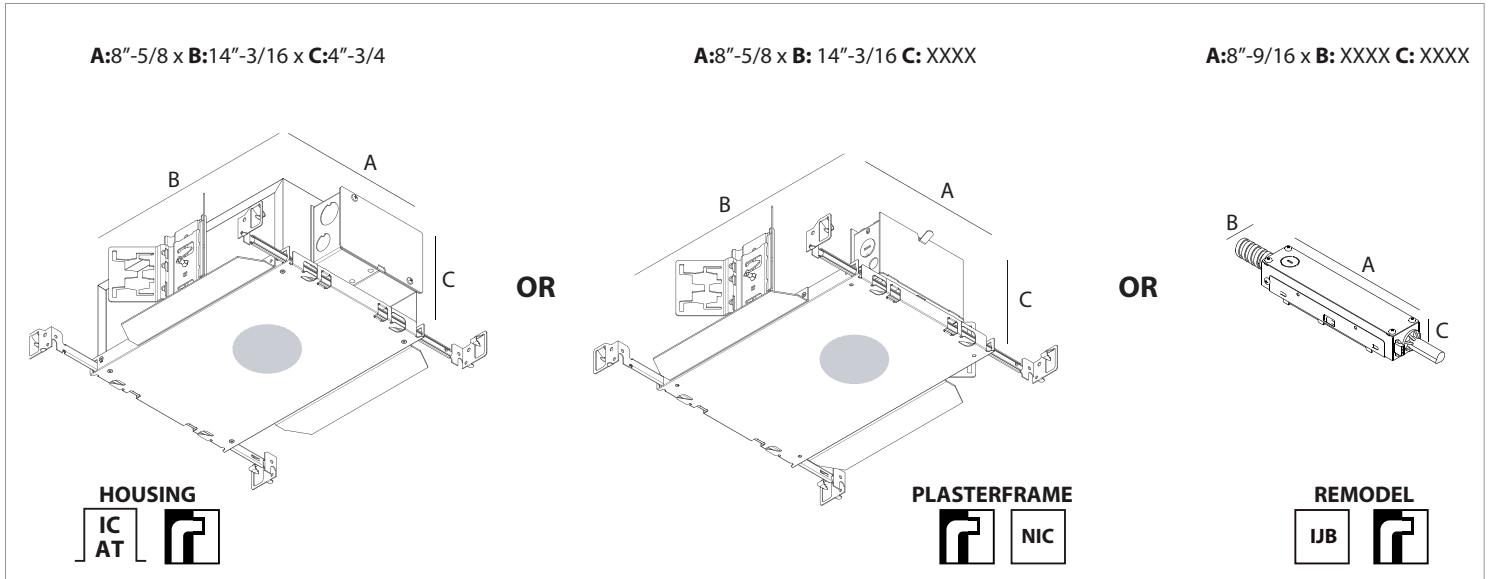

● Indicative opening

## HOUSING FOR IC AND/OR AIRTIGHT APPLICATIONS

## ROUGH-IN REQUIREMENTS

A		B		C1		C2		D		E1		E2	
DIRO TRIMLESS LED SOFT		202		7		22		77		1		1	
RANGE		INSTALLATION TYPE		POWER & DIMMING		VOLTAGE		MOUNTING OPTION		VOLTAGE		MOUNTING OPTION	
6		IC/NIC AT HOUSING S		13W 650mA MAINS DIM (FE)		1 - 120V 2 - 277V 3 - 120-277V 4 - 347V*		0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD		1 - 120V		1 - BAR HANGERS STANDARD	

## PLASTERFRAME FOR NON-IC APPLICATIONS



A		B		C1		C2		D		E1		E2	
DIRO TRIMLESS LED SOFT		202		01		22		77		1		1	
RANGE		INSTALLATION TYPE		POWER & DIMMING		VOLTAGE		MOUNTING OPTION		VOLTAGE		MOUNTING OPTION	
6		NIC PLASTERFRAME S		13W 650mA MAINS DIM (FE)		1 - 120V 2 - 277V 3 - 120-277V 4 - 347V*		0 - NO BAR HANGERS 1 - BAR HANGERS STANDARD		1 - 120V		1 - BAR HANGERS STANDARD	

## REMODEL NON-IC APPLICATIONS IN COMBINATION WITH MOUNTING KIT R127 TRIMLESS

A		B		C1		C2		D		E1		E2	
DIRO TRIMLESS LED SOFT		202		9		22		99		1		1	
RANGE		INSTALLATION TYPE		POWER & DIMMING		VOLTAGE		SPACINGS		VOLTAGE		SPACINGS	
6		NIC-REMODEL		13W 650mA MAINS DIM		1 - 120V 2 - 277V 3 - 120-277V 4 - 347V*		1 - STANDARD SPACINGS 2 - MARKED SPACINGS		1 - 120V		1 - MARKED SPACING	



INSTALLATION LUMINAIRE

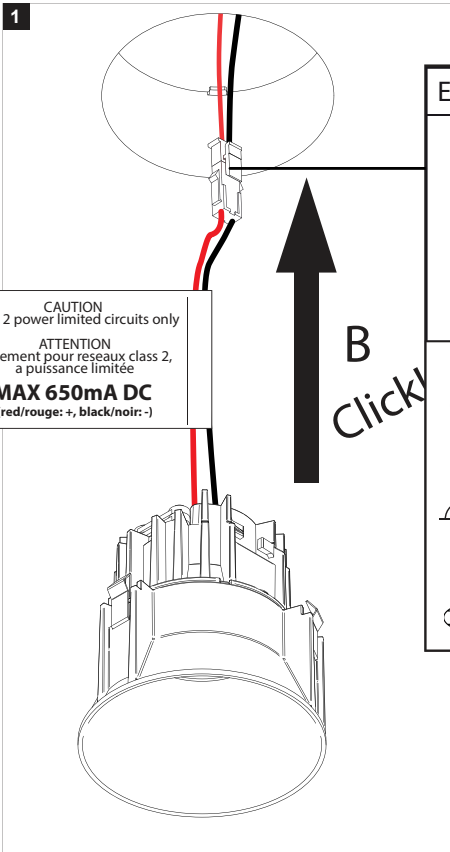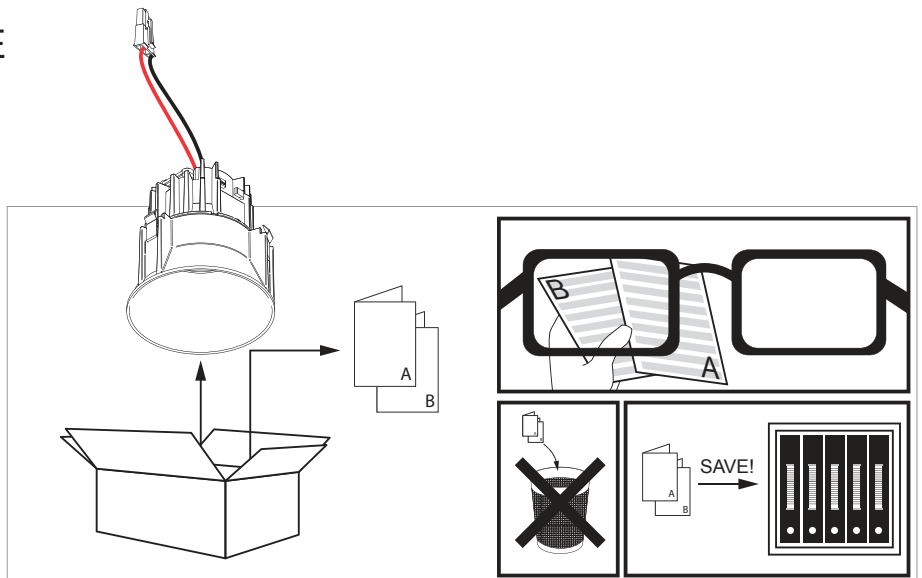

CAUTION  
class 2 power limited circuits only  
ATTENTION  
seulement pour reseaux class 2,  
a puissance limitée  
**MAX 650mA DC**  
(red/rouge: +, black/noir: -)

**ELECTRICAL CONNECTION** ⚠

SOFT DIM

**ONLY WITH POWER SUPPLIES**

**300 90 915 ED8**

**Falling Edge dimming**      220-240V / 50-60Hz  
650mA / 10W / 12-16Vdc

**300 90 915 ED5**

**DALI Digital dimming**      220-240V / 50-60Hz  
650mA / 10W / 12-16Vdc

