

DEEP RINGO S LED 92733 S1◇

6 202 28 811 922 ◇

◇ = B / W / MMAT

DEEP RINGO S LED 93033 S1◇



6 202 28 811 932 ◇

◇ = B / W / MMAT

DEEP RINGO S LED 93533 S1◇

6 202 28 811 952 ◇

◇ = B / W / MMAT

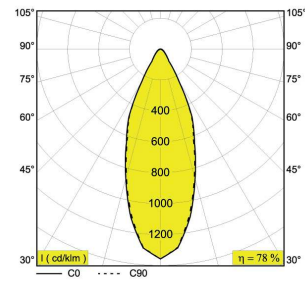

Application

Finishing section to be used with DELTA LIGHT® rough-in housing, plasterframe or remodel IJB option.

Ceiling Thickness

For 5/8" ceiling standard up to 7/8"

Color Finish

W - White

B - Black

MMAT - Gold Mat

Light Source

Two 10,4 - 15W LED module included

Delivered Lumens

1109lm at 3500K⁽¹⁾

1075lm at 3000K⁽¹⁾

1032lm at 2700K⁽¹⁾

Power Supply

Included in rough-in or remodel IJB option.

Connector

Rough-in and trim connection through pre-installed snap-in connector

Specification features

Body fabricated of surface treated aluminum

Pre-installed springs for easy installation


Suitable for dry and damp locations

Dimensions

Height: 56 mm = 2" - 3/16


Width: Ø82 = Ø3" - 1/4

Ceiling Cut out: Ø 76 mm = Ø 3"

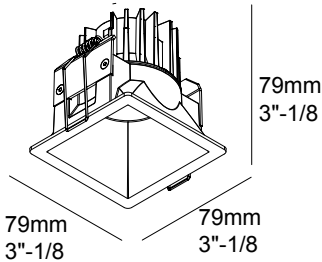



ROUGH-IN REQUIREMENTS

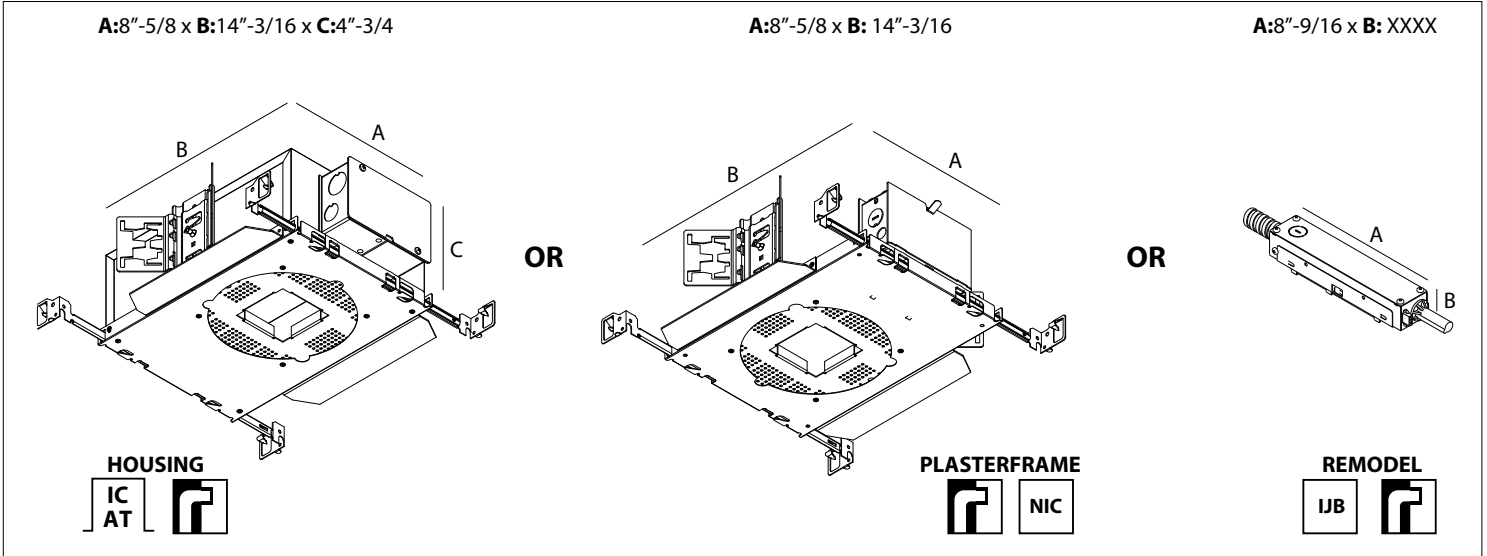

Required options (Values per LED)

New construction

Housing for IC and/or airtight applications

Range	Installation type	Power/Dimming		Voltage	Mounting Option
6	202	7 - IC AT Housing S	43 - 10,4W 0-10V DIM	05	1 - 120V 2 - 277V 3 - 120-277V
6	202	7 - IC AT Housing S	62 - 10,4W mains dimmable (ELV)	05	0 - No bar hangers 1 - Bar hangers standard
6	202	7 - IC AT Housing S	43 - 10,4W 0-10V DIM	05	1 - Bar hangers standard
6	202	7 - IC AT Housing S	62 - 10,4W mains dimmable (ELV)	05	1 - Bar hangers standard

New construction

Plasterframe for NON-IC applications

Range	Installation type	Power/Dimming		Voltage	Mounting Option
6	202	01 - NIC Plasterframe S	43 - 10,4W mains dimmable (ELV)	05	1 - 120V 2 - 277V 3 - 120-277V
6	202	01 - NIC Plasterframe S	43 - 10,4W mains dimmable (ELV)	05	0 - No bar hangers 1 - Bar hangers standard
6	202	01 - NIC Plasterframe S	62 - 10,4W mains dimmable (ELV)	05	1 - Bar hangers standard
6	202	01 - NIC Plasterframe S	43 - 10,4W mains dimmable (ELV)	05	1 - Bar hangers standard
6	202	01 - NIC Plasterframe S	62 - 10,4W mains dimmable (ELV)	05	1 - Bar hangers standard






Remodel IJB

Range	Installation type	Power/Dimming		Voltage	Spacings
6	202	9 - NIC-IC IJB	19 - 10,4W mains dimmable (ELV)	1 - 120V	1 - Standard spacings
6	202	9 - NIC-IC IJB	20 - 10,4W 0-10V DIM	1 - 120V	1 - Standard spacings
6	202	9 - NIC-IC IJB	20 - 10,4W 0-10V DIM	2 - 277V	1 - Standard spacings
6	202	9 - NIC-IC IJB	21 - 15W mains dimmable (ELV)	1 - 120V	1 - Marked spacings
6	202	9 - NIC-IC IJB	69 - 15W 0-10V DIM	1 - 120V	1 - Marked spacings
6	202	9 - NIC-IC IJB	69 - 15W 0-10V DIM	2 - 277V	1 - Marked spacings

⁽¹⁾Values based on 33° White finish



INSTALLATION LUMINAIRE

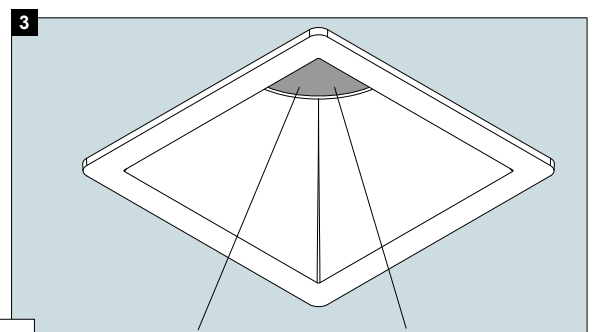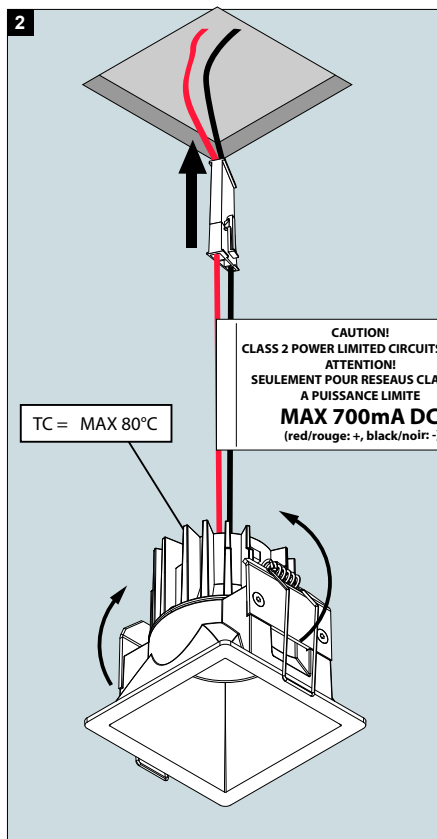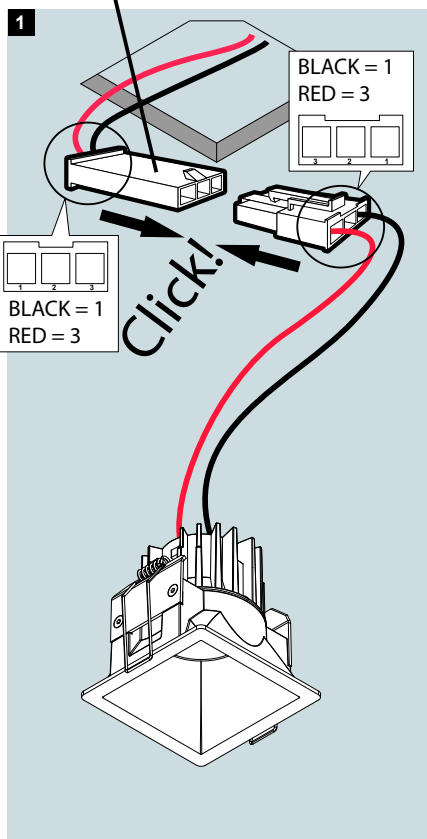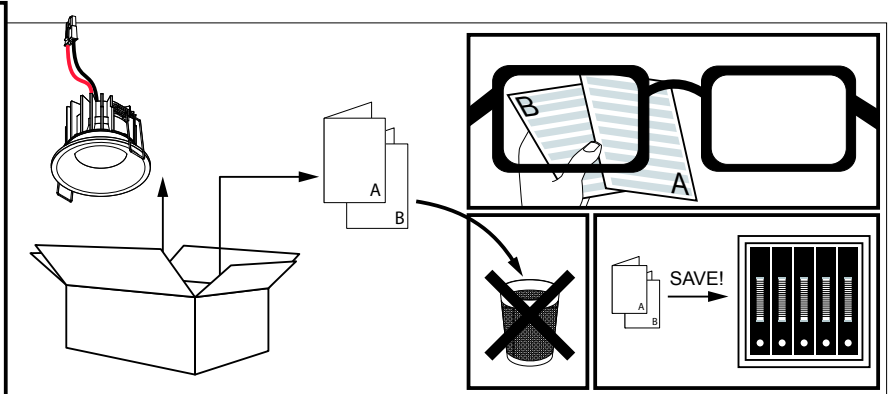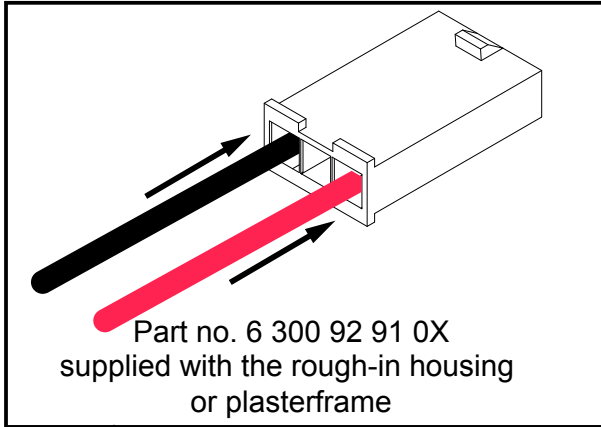

 INSTALLATION IJB

