


- CARREE TRIMLESS LED 92733 S1 ◇
6 202 51 811 922◇
◇ = A / W
- CARREE TRIMLESS LED 93033 S1 ◇
6 202 51 811 932◇
◇ = A / W
- CARREE TRIMLESS LED 93533 S1 ◇
6 202 51 811 952◇
◇ = A / W



Application

Finishing section to be used with DELTA LIGHT® rough-in housing, plasterframe or mounting kit trimless

Ceiling Thickness

For 5/8" ceiling standard up to 7/8"

Light source

One 15W LED module included

Power Supply

Included in rough-in or remodel option.

Connector

Housing and trim connection through pre-installed snap-in connector

Specification features

- Housing fabricated of powder coated steel
- Pre-installed springs for easy installation
- Suitable for dry or damp locations
- Protected against solid objects greater than 12mm IP20

Dimensions

- Height: 71 mm = 2" - 13/16
- Width: 77 mm x 77 mm = 3" x 3"
- Ceiling Cut out: 216 mm x 190 mm = 8" - 1/2 x 7" - 1/2

Required options

New construction
Housing for IC and/or airtight applications


Range	Installation type	Power/Dimming		Voltage 1 - 120V 2 - 277V 3 - 120-277V	Mounting Option 0 - No bar hangers 1 - Bar hangers standard
6 202	7 - IC AT Housing S	43 - 10,4W 1-10V DIM	06	1 - 120V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	62 - 10W mains dimmable (ELV)	06	1 - 120V	1 - Bar hangers standard

New construction
Plasterframe for NON-IC applications

Range	Installation type	Power/Dimming		Voltage 1 - 120V 2 - 277V 3 - 120-277V	Mounting Option 0 - No bar hangers 1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	43 - 10,4W 1-10V DIM	06	1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	43 - 10,4W 1-10V DIM	06	2 - 277V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	62 - 10W mains dimmable (ELV)	06	1 - 120V	1 - Bar hangers standard

Remodel


Range	Installation type	Power/Dimming		Voltage 1 - 120V 2 - 277V 3 - 120-277V	Spacings 1 - Standard spacings 1 - Marked spacings
6 202	9 - NIC-IC IJB	19 - 10W mains dimmable (ELV)		1 - 120V	1 - Standard spacings
6 202	9 - NIC-IC IJB	20 - 10W 0-10V DIM		1 - 120V	1 - Standard spacings
6 202	9 - NIC-IC IJB	20 - 10W 0-10V DIM		2 - 277V	1 - Standard spacings
6 202	9 - NIC-IC IJB	21 - 14W mains dimmable (ELV)		1 - 120V	1 - Marked spacings
6 202	9 - NIC-IC IJB	69 - 14W 0-10V DIM		1 - 120V	1 - Marked spacings
6 202	9 - NIC-IC IJB	69 - 14W 0-10V DIM		2 - 277V	1 - Marked spacings

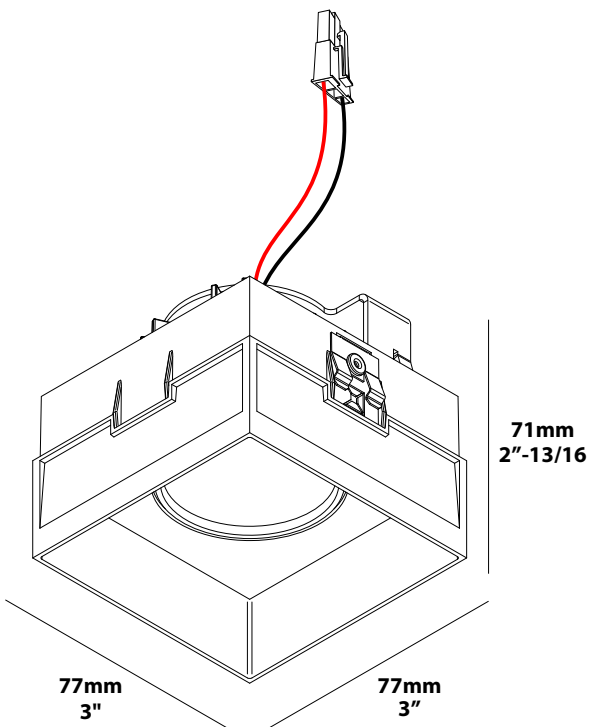









INSTALLATION LUMINAIRE

Not Supplied

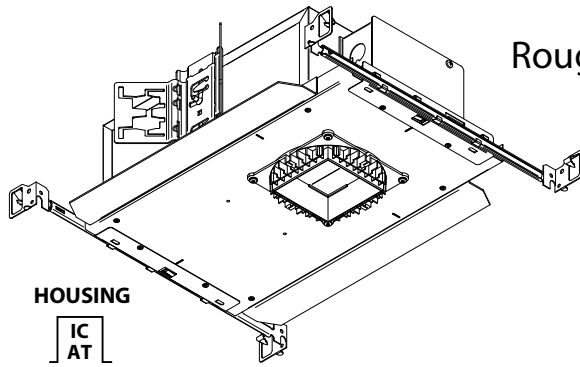

Rough-in Housing or Plasterframe Required

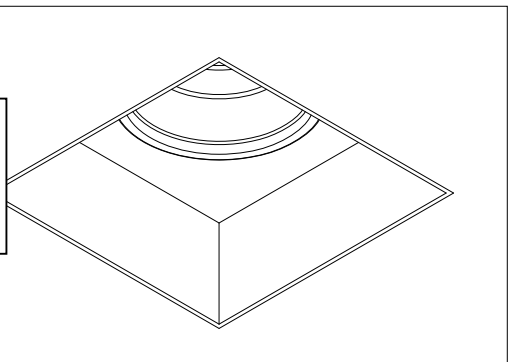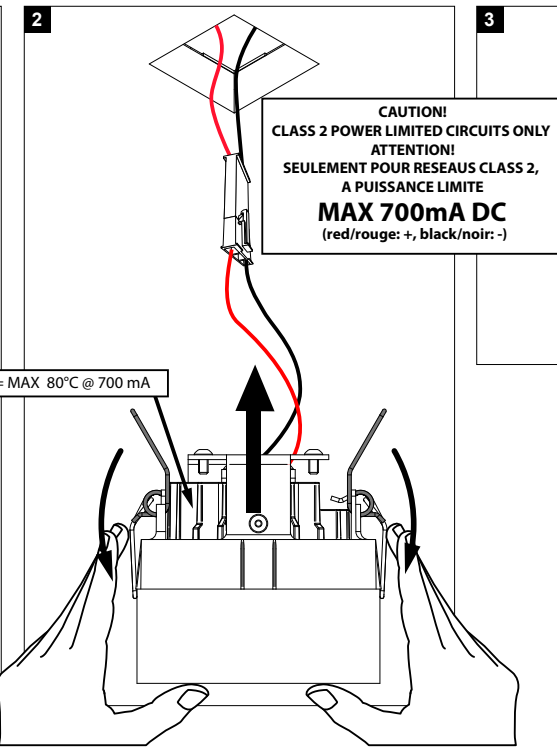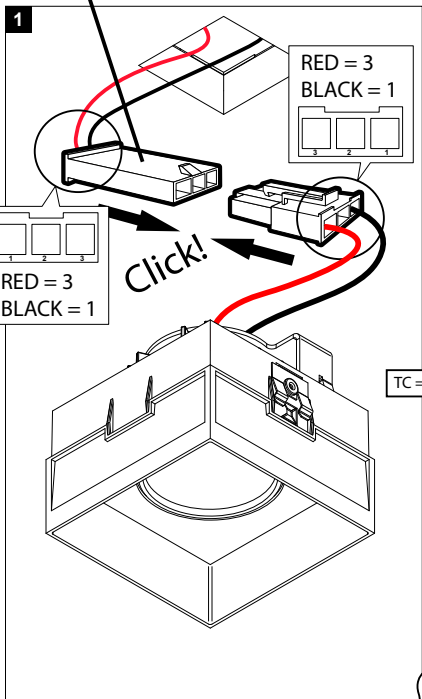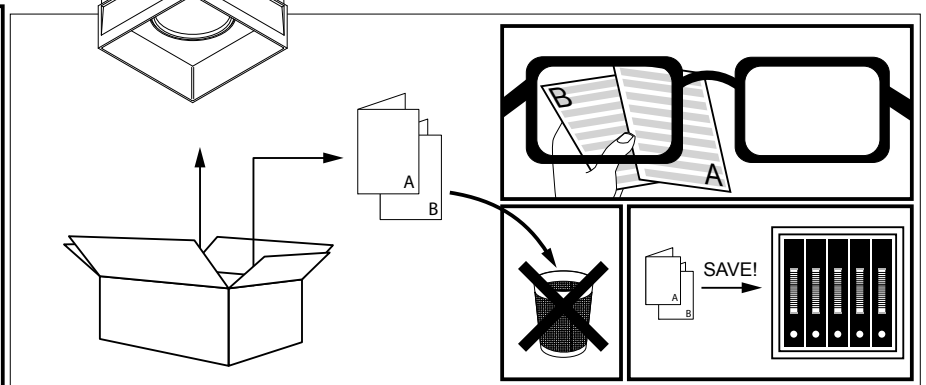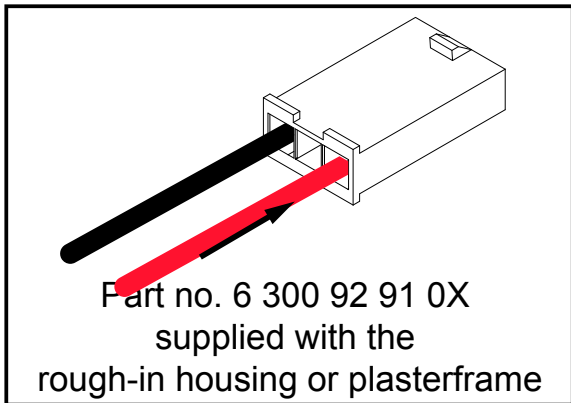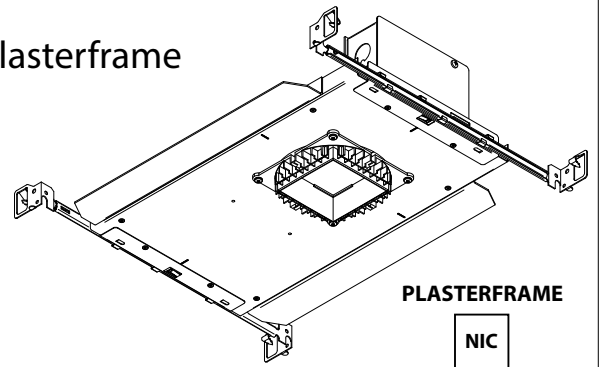



INSTALLATION IJB

RED = 3
BLACK = 1

