


LOGIC 60 R1 A MOON 93020◇

6 213 461 10 811 932◇

◇ = ANO

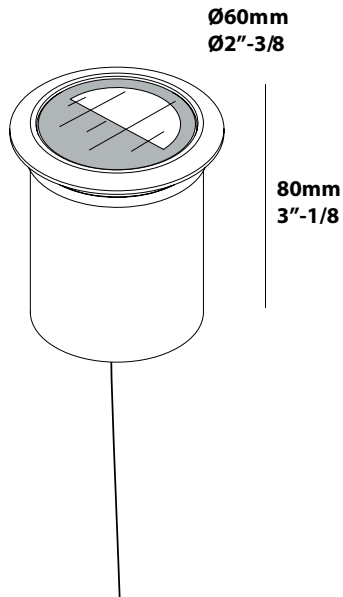

Application

Floor recessed
For indoor & outdoor use

Color Finish

ANO - Alu anodized
B - Black anodized

Light source

1 x POWERLED WHITE 7,1W

Product description





Anodised aluminum housing with hardened glass cover
Remote 24Vdc, class 2 power supply required, non dimmable
Moisture lock included
5' cable 2x20 AWG included
Reflector FL-20°
Suitable for dry, damp or wet locations, floor recessed
Dust-tight - Protected against the effects of temporarily immersion ➔ IP67
Weight: 1,3lbs 0,6kg

Options (not supplied)

6 216 12 00	JUNCTION BOX
6 216 12 02	IP67 CONNECTOR 3P
6 213 19 10	LOGIC 60 BOX R

 **INSTALLATION LUMINAIRE**

Accessories

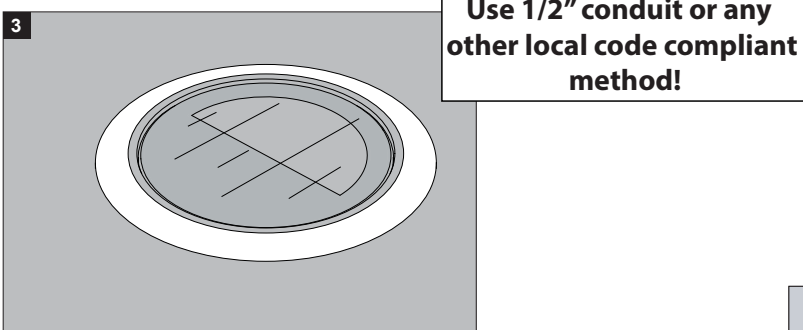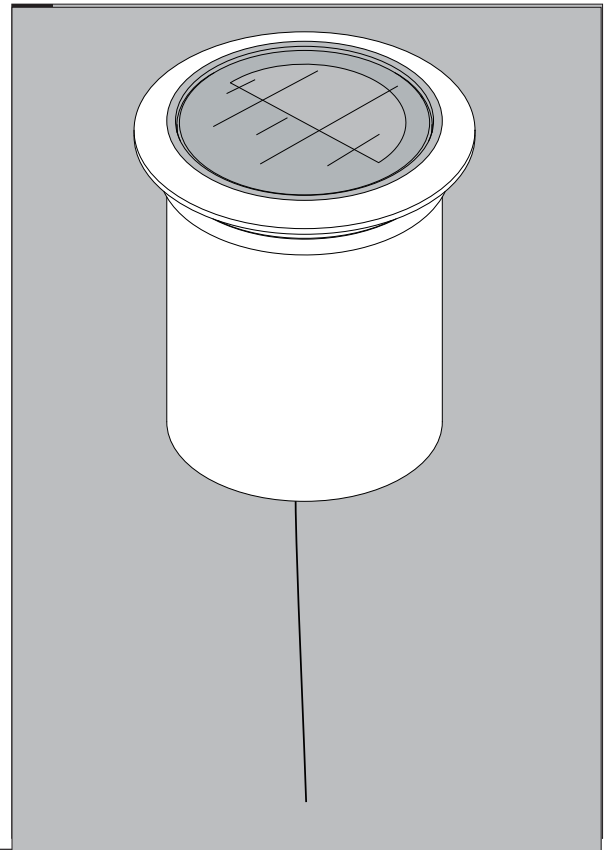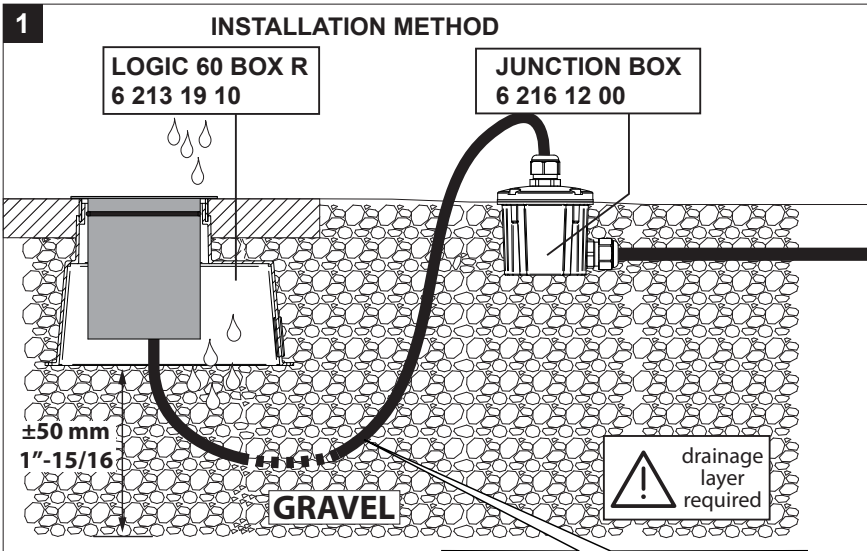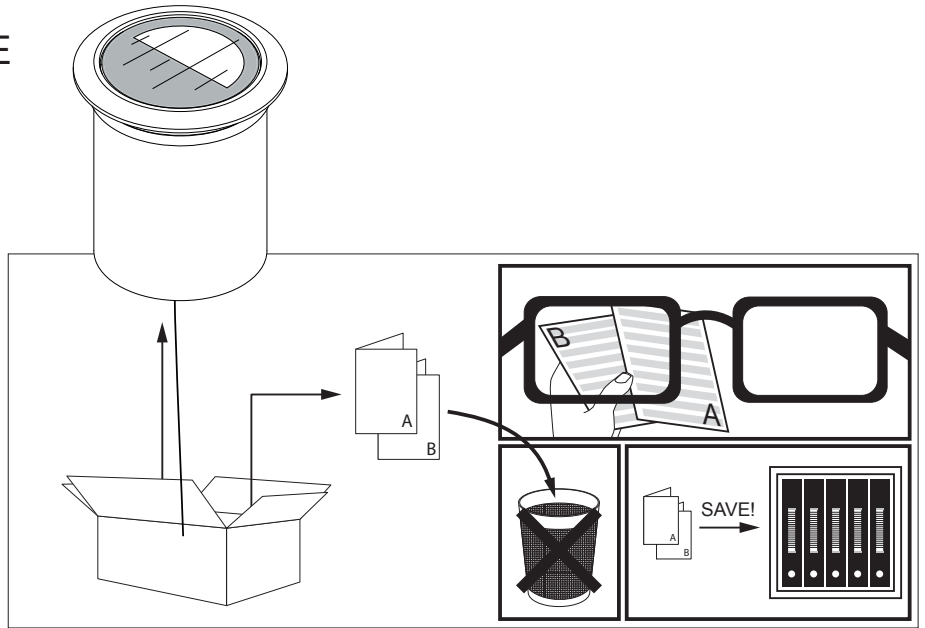

!

LUMINAIRES MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. CHECK WITH LOCAL AND NATIONAL CODES FOR PROPER INSTALLATION. TO PREVENT ELECTRICAL SHOCK, DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING

! WARNING

ANY CLAIM TO A WARRANTY SHALL BECOME NULL AND VOID IF THE DEVICE IS NOT INSTALLED WITH THE SUITABLE BOX (OPTIONAL) PROVIDED BY DELTALIGHT N.V.

