

- LOGIC R1 93011**◇
- 6 213 471 811 931◇
- ◇ = ANO
- LOGIC R1 93030**◇
- 6 213 471 811 932◇
- ◇ = ANO
- LOGIC R1 93055**◇
- 6 213 471 811 933◇
- ◇ = ANO
- LOGIC R1 93511**◇
- 6 213 471 811 951◇
- ◇ = ANO
- LOGIC R1 93530**◇
- 6 213 471 811 952◇
- ◇ = ANO
- LOGIC R1 93555**◇
- 6 213 471 811 953◇
- ◇ = ANO



**Application**  
 Floor recessed  
 For indoor & outdoor use


**Color Finish**  
 ANO - Alu anodized

**Light source**  
 1 x POWERLED WHITE 7,1W

**Product description**  
 Anodised aluminum housing with hardened glass cover  
 For 24V-DC Current voltage, class 2 power limited circuits only, non dimmable  
 5' Anti-wicking cable 2x20 AWG included  
 Suitable for dry, damp or wet locations, floor recessed  
 Dust-tight - Protected against the effects of temporarily immersion → IP67  
 Weight: 1,3lbs 0,6kg





**Accessories not supplied (required)**  
 213 19 09 GENIE BOX 90 R

**Options (not supplied)**  
 6 216 12 00 JUNCTION BOX  
 6 216 12 02 IP67 CONNECTOR 3P

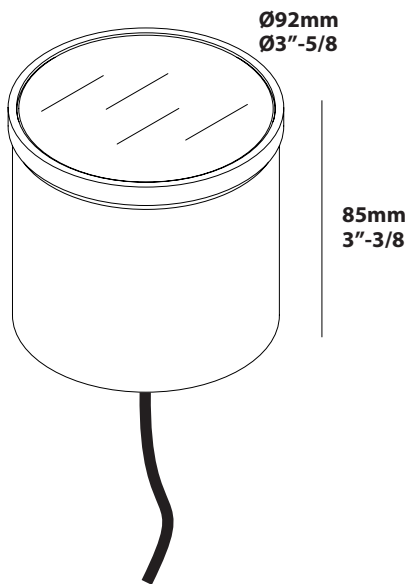

 **INSTALLATION LUMINAIRE**

Accessories

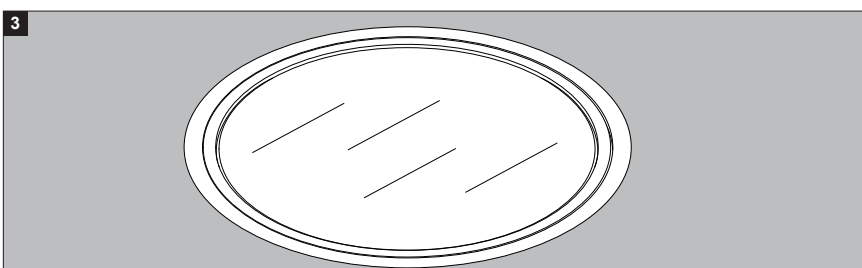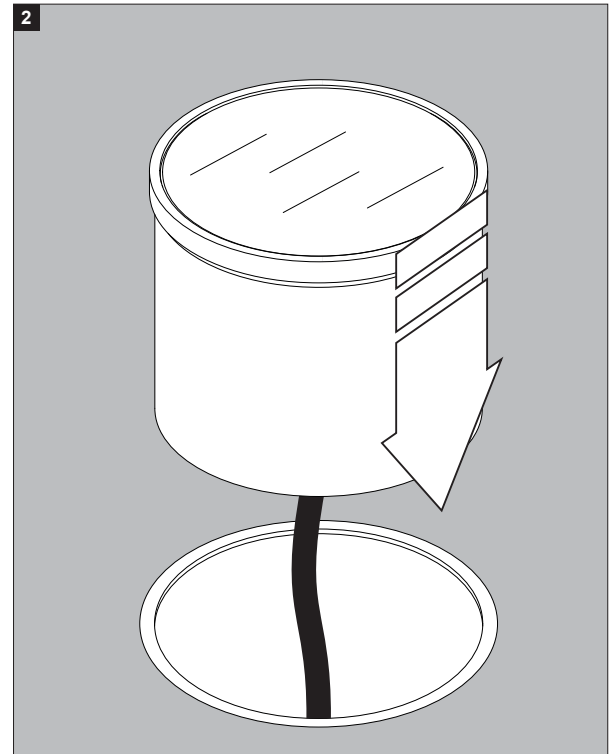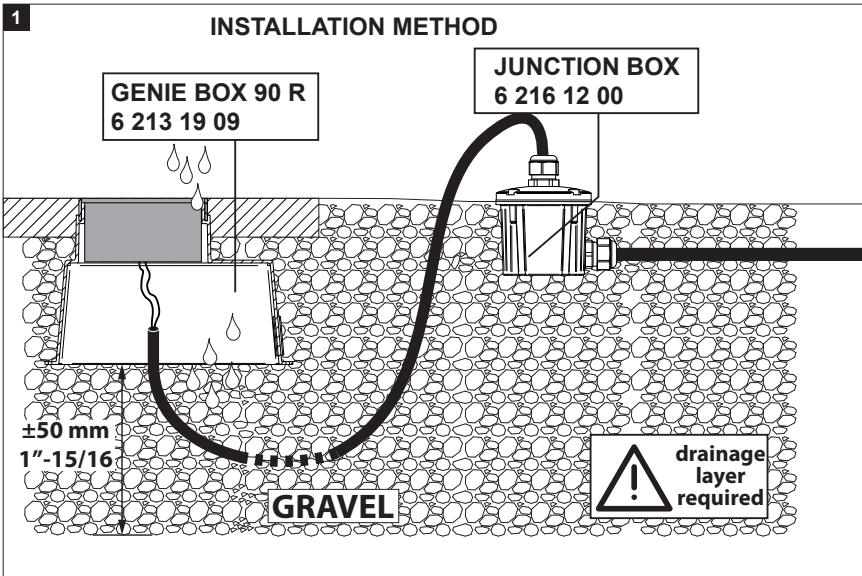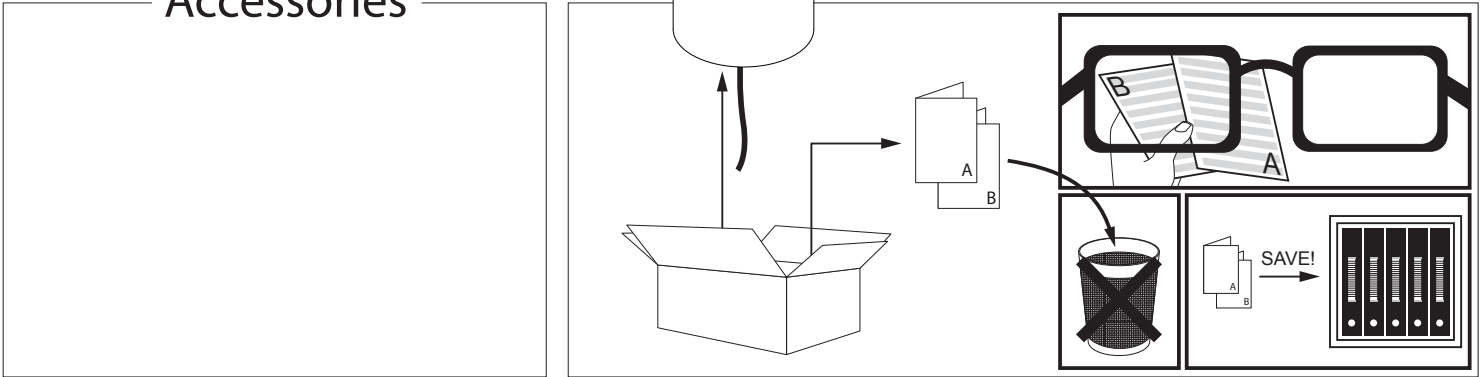

**LUMINAIRES MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. CHECK WITH LOCAL AND NATIONAL CODES FOR PROPER INSTALLATION. TO PREVENT ELECTRICAL SHOCK, DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING**

**⚠ WARNING**

ANY CLAIM TO A WARRANTY SHALL BECOME NULL AND VOID IF THE DEVICE IS NOT INSTALLED WITH THE SUITABLE BOX (OPTIONAL) PROVIDED BY DELTALIGHT N.V.

