Orbel Pyramid and Round Pendant

700TDOBLP, 700TDOBLR 1.0



GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product can be dimmed with most ELV or TRIAC dimmers.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.





7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.techlighting.com

© 2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.


A Generation Brands Company

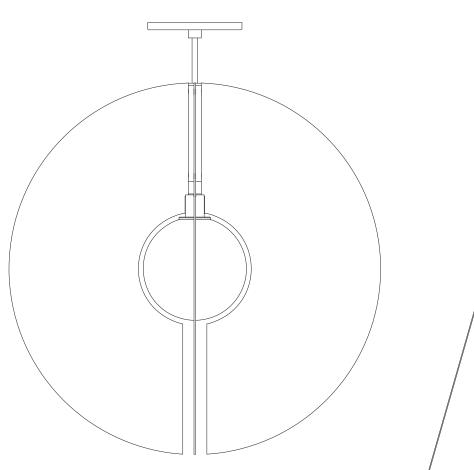

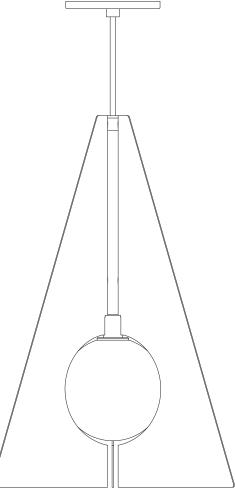

SAVE THESE INSTRUCTIONS!

Install the Fixture

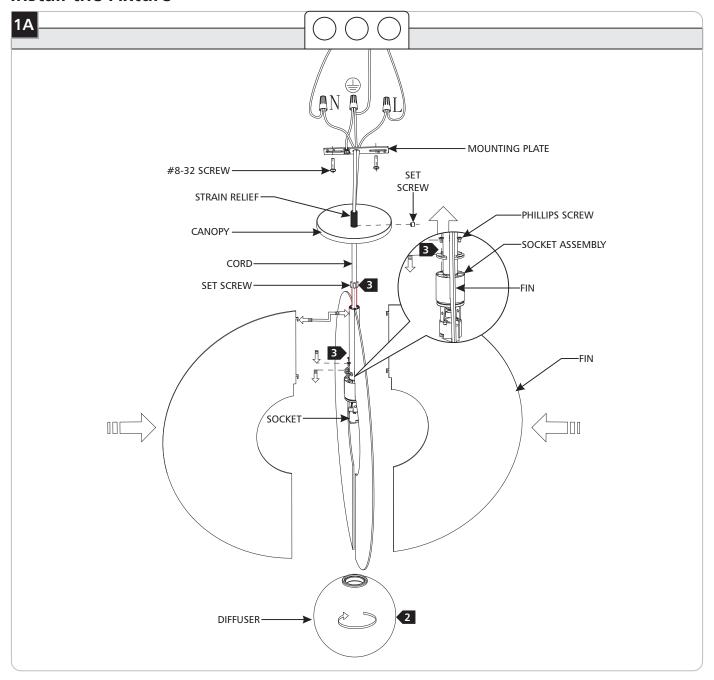

CAUTION: To reduce the risk of a burn or electric shock during re-lamping, disconnect the power to the fixture.

- 1 Install the lamp by inserting it into the socket. Refer to the label on the socket for Max Wattage Information.
- 2 Install the diffuser by screwing it over the socket. Make sure the diffuser is secure before releasing. Do not over tighten.
- Install the fin by inserting the hooks into the slots on the socket assembly, then sliding downward. Tighten the set screws at the top of the socket assembly and Phillips screw at the bottom of the socket assembly to secure the fins in place. Repeat for remaining fins.
- 4 Follow the instructions included with the canopy to complete installation.
- 5 Replacing the Lamp:
 - **(b)** While keeping the fixture as still as possible, carefully unscrew and remove the set screws and Phillips screws at the top and bottom of the socket assembly.
 - (Carefully remove the fins to gain access to the diffuser.
 - Carefully unscrew and remove the diffuser.
 - Remove the old lamp and replace with new one.
 - Reinstall the diffuser and fins.