


ASSEMBLY & INSTALLATION INSTRUCTIONS

A958

Glacier Pendant 139208

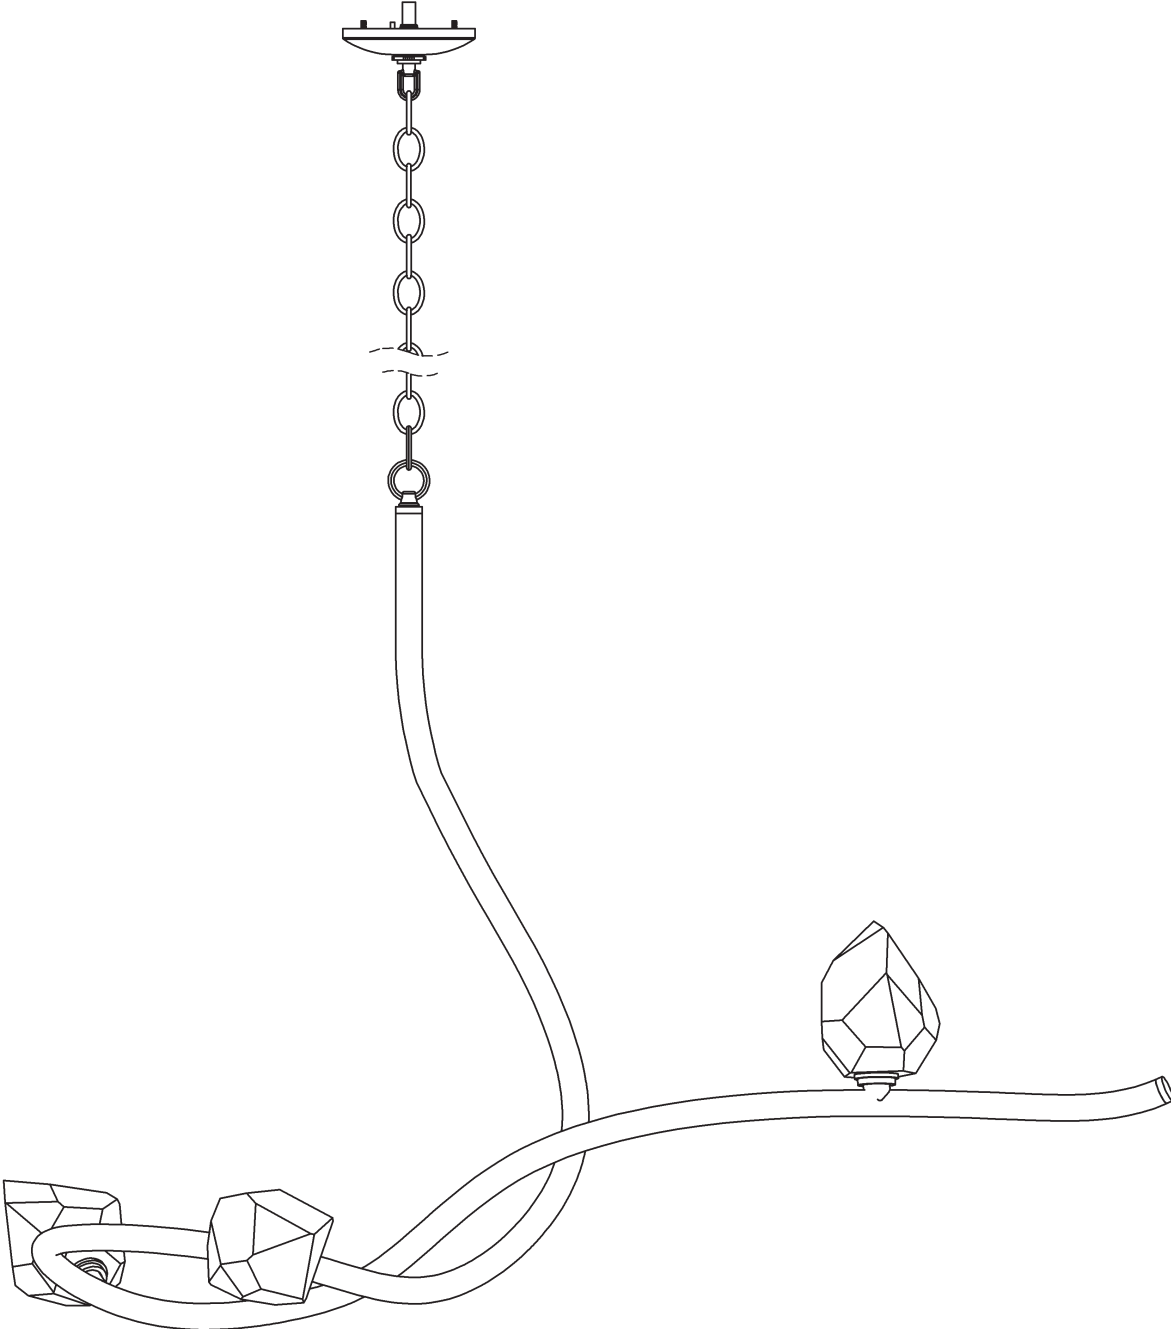

**Component Parts**

- A     Fixture**
- B     Crossbar**
- C     Ground Screw**
- D     Lock Nut**
- E     Canopy**
- F     Canopy Ring**
- G     Canopy Loop**
- H     Fixture Loop**
- I     Nipple**
- J     Chain**
- K     Glass Assembly (3)**
- L     Bulb, not included (3)**
- M     Socket (3)**
- N     Collar (3)**



# ASSEMBLY & INSTALLATION INSTRUCTIONS

A958

Glacier Pendant 139208

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

## To Install Fixture (Figure 1)

**CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.**

1. Carefully unpack fixture (A) from the carton.
2. Using two machine screws (not provided), temporarily fasten crossbar (B) to electric box with head of the ground screw (C) facing down.  
**Note:** A new electric box comes with screws. When replacing a fixture, retain existing screws for use with new fixture.
3. Thread nipple (I) into crossbar (B) and then thread lock nut (D) and canopy loop (G) onto threaded nipple, leaving parts loose. Adjust length of threaded nipple in crossbar so that canopy ring (F), which comes threaded onto canopy loop (G), will hold canopy (E) against the ceiling with no threads showing for best appearance. When correct adjustment is established, tighten lock nut (D) against crossbar (B) to hold adjustment.
4. Remove the crossbar (B) assembly from electrical box.
5. Attach one end of chain (J) to fixture loop (H) using a chain spreader (not provided). Lace the wires through every other link of chain to the end. Slip wires and chain through canopy ring (F) and canopy (E). Orient canopy ring such that the smaller side is pointed up. Allow canopy ring (F) and canopy (E) to slide down chain (J) and rest on fixture loop (H). Fasten chain (J) to the canopy loop (G).
6. Slip wires through canopy loop (G) and nipple (I). Make sure to provide enough slack in the wire to ensure weight of fixture is supported by the chain (J).
7. Using two machine screws (not provided), reattach crossbar (B) to the electric box.
8. Using suitable wire connectors (not provided) connect fixture wires to supply wires (white to ribbed side of the fixture cord, black to smooth side). Run a pigtail lead from crossbar ground screw (D) to junction box and connect all ground wires (bare copper or green to bare copper or green).

**CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY AND NO BARE WIRE IS EXPOSED.**

9. Raise canopy (E) to ceiling and secure canopy ring (F) to canopy loop (G).

**CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN THE CANOPY (E) AND THE CEILING.**

10. See page 5 for bulb and glass installation.




HUBBARDTON FORGE.

# ASSEMBLY & INSTALLATION INSTRUCTIONS

A958

Glacier Pendant 139208

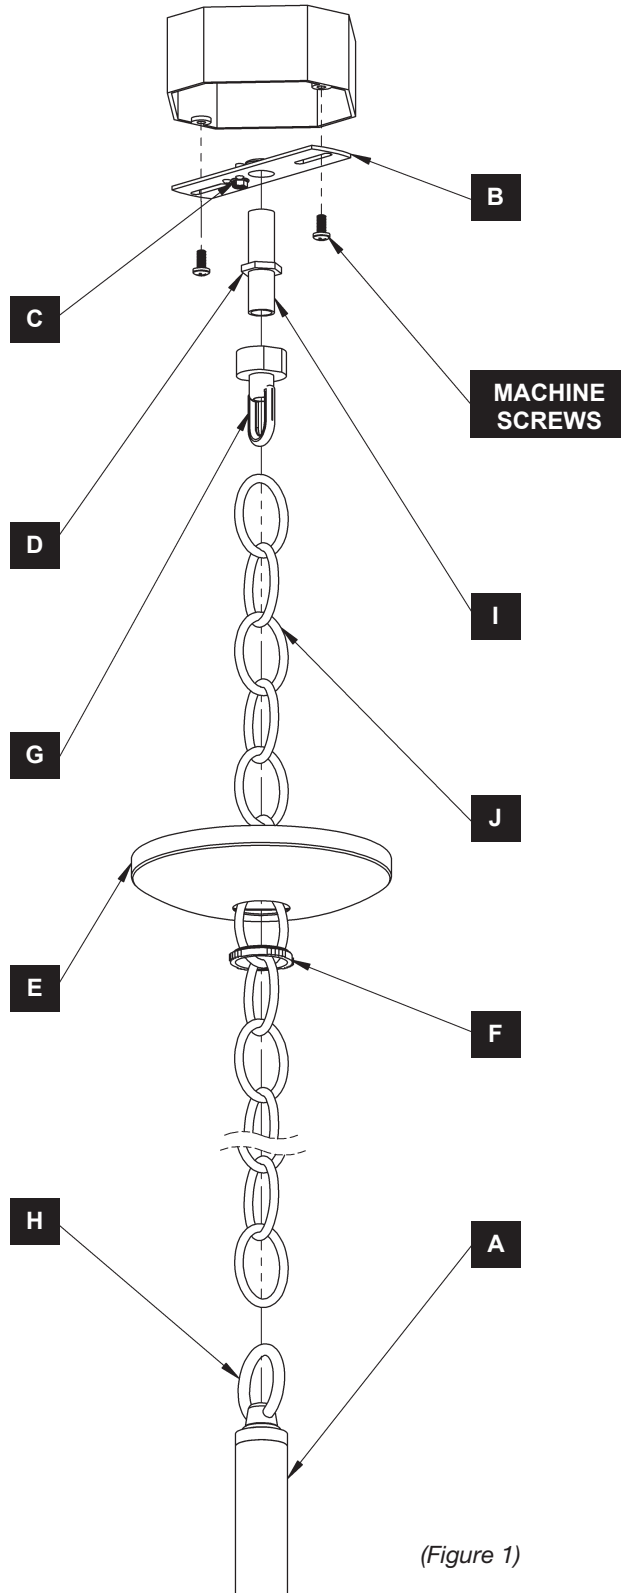

(Figure 1)

Glacier Pendant 139208

## To Install Glass (Figure 2)


1. Locate glass assembly (K).
2. Press bulb (L), not included, into socket (M).
3. Thread glass assembly (K) onto collar (N).
4. Repeat for remaining bulbs (L), sockets (M) and glass assemblies (K).
5. Restore electricity at main breaker.

## Glass Cleaning & Maintenance

This glass is very prone to fingerprints – Glass will need to be cleaned as part of regular maintenance.

**Black/White Section** – Take a Scotchbrite pad (or similar) and rub the ENTIRE section – not just the spot with the fingerprint. Next spray a soft cloth with glass cleaner and wipe the surface.

For the clear glass section, use glass cleaner with soft cloth only (no pad).

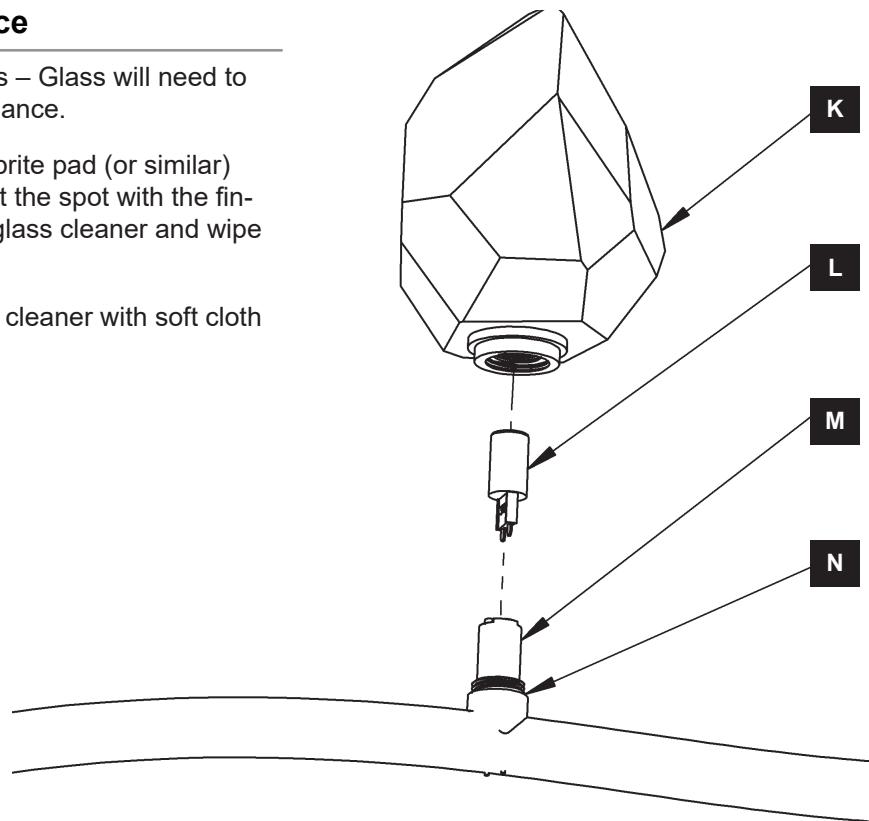

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

**\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**