Nyra 25 & 36 Bath

700BCNYR_, SLBA14730_ 1.0

VISUAL COMFORT & CO.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

120V dimmable with most LED compatible ELV and TRIAC dimmers. 277V compatible with 0-10V dimmers.


This instruction shows a typical installation.


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!



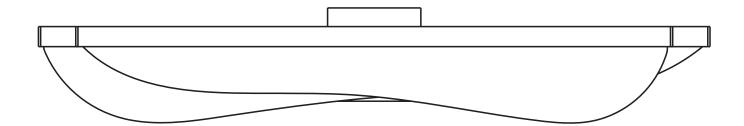

Install the Fixture

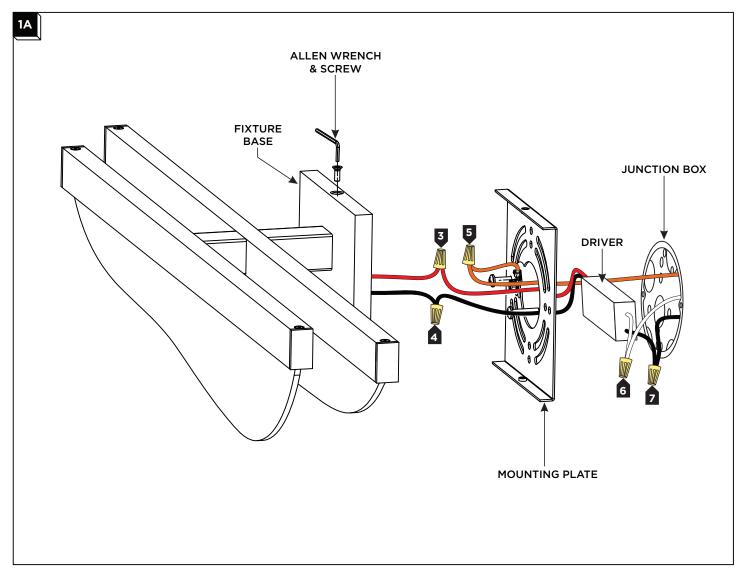

- With the provided Allen wrench, remove the Allen screws on the fixture base.
- 2 Remove the mounting plate from the fixture base
- Connect the black/blue driver wire to the black/blue fixture wires with a wire nut.
- Connect the red driver wire to the red fixture wires with a wire nut.
- 5 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 6 Connect the white driver wire to the neutral power line with a wire nut.
- Connect the black driver wire to the hot power line with a wire nut.
- Properly place the driver, all wires, and wire nut connections into the junction box, then install the mounting plate to the junction box with the two #8-32 screws provided.

9 Mount the fixture base onto the mounting plate and secure it in place by reinstalling the Allen screws using the provided Allen wrench.

VISUAL COMFORT & CO.

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.**visualcomfort**.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification