

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Disc

### Ceiling and Wall Mount

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
FM-304 4"	930 3000K - 90	12W	725	BN Brushed Nickel BZ Bronze WT White

Example: **FM-304-930-WT**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Multiple high-powered LEDs illuminate an acrylic diffuser uniformly without socket shadows, which are common in conventional flush mounts. This multi-purpose Wet Location, Energy Star® Rated flush mount can be mounted without a transformer on a ceiling or on a wall in a junction box, and also includes an optional retrofit kit with an A19 socket designed to fit into an existing 3" - 6" recessed unit. The disc is available in 6" and 4" sizes, and various finishes and color temperature options.

#### FEATURES


- Multiple LED array for uniform illumination
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5%
Rated Life:	50000 Hours
Mounting:	FM-304: Retrofit over a 4" recessed can or install over a 3" or 4" junction box, Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Die-cast aluminum with white acrylic diffuser




#### FINISHES:



Bronze White Brushed Nickel

#### LINE DRAWING:

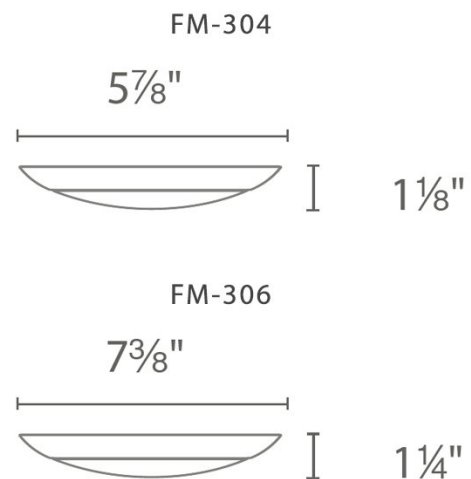

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Disc

### Ceiling and Wall Mount

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
FM-306 6"	930 3000K - 90 940 4000K (6" only) - 90	15W	950	BN Brushed Nickel BZ Bronze WT White

Example: **FM-306-940-WT**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Multiple high-powered LEDs illuminate an acrylic diffuser uniformly without socket shadows, which are common in conventional flush mounts. This multi-purpose Wet Location, Energy Star® Rated flush mount can be mounted without a transformer on a ceiling or on a wall in a junction box, and also includes an optional retrofit kit with an A19 socket designed to fit into an existing 3" - 6" recessed unit. The disc is available in 6" and 4" sizes, and various finishes and color temperature options.

#### FEATURES


- Multiple LED array for uniform illumination
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

<b>Color Temp:</b>	3000K,4000K (6" only)
<b>Input:</b>	120 VAC,50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100-5%
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	FM-306: Retrofit over a 5" or 6" recessed can or install over a 3" or 4" junction box, Can be mounted on ceiling or wall in all orientations
<b>Standards:</b>	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
<b>Construction:</b>	Die-cast aluminum with white acrylic diffuser



#### FINISHES:



Bronze

White

Brushed Nickel

#### LINE DRAWING:

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Disc

### Ceiling and Wall Mount

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
FM-306-JB 6"	930 3000K - 90	15W	945	WT White

Example: **FM-306-930JB-WT**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Multiple high-powered LEDs illuminate an acrylic diffuser uniformly without socket shadows, which are common in conventional flush mounts. This multi-purpose Wet Location, Energy Star® Rated flush mount can be mounted without a transformer on a ceiling or on a wall in a junction box, and also includes an optional retrofit kit with an A19 socket designed to fit into an existing 3" - 6" recessed unit. The disc is available in 6" and 4" sizes, and various finishes and color temperature options.

#### FEATURES


- Multiple LED array for uniform illumination
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5%
Rated Life:	50000 Hours
Mounting:	FM-306-930JB: Install over a 3" or 4" junction box, Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Die-cast aluminum with white acrylic diffuser



#### FINISHES:



#### LINE DRAWING: