


PRODUCT DESCRIPTION

Channels of Black are fused in an erratic fashion concealing a LED light source that emits a soft and even illumination to the surface below. Light intensity is adjustable down to 10% to allow for multiple room scene settings.

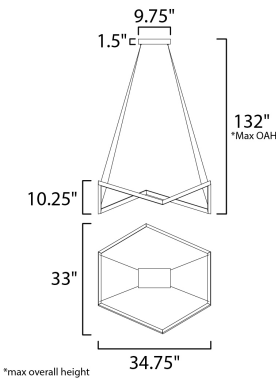

MEASUREMENTS

DIMENSION : 34.75" L x 33" W x 10.25" H
MAX OAH : 132" OAH
CANOPY : 6" W x 1.5" H x 9.75" L
HANGING WEIGHT : 7.7 lb

LAMPING

INPUT VOLTAGE : 120V
LUMENS : 3,500 Rated (2,200 Del.)
BULB : 1 x 50W LED PCB Integrated , 50W Total
BULB INCLUDED : (Integrated)
DIMMABLE : ELV
CRI : 80+ CRI
COLOR_TEMP : 3000K

FINISHES OPTION

Black

MATERIAL

Aluminum, Steel

RATINGS

cETLus
Dry Location



ADDITIONAL

ADJUSTABLE
SLOPE: 70
RATED LIFE 50000 Hours
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)
PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product.



Contemporary
Lighting™

WESTERN DISTRIBUTION CENTER (HEADQUARTER)
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746
EASTERN DISTRIBUTION CENTER
4200 SHIRLEY DR. | ATLANTA, GA 30336
P. 626.956.4200 | F. 626.956.4225 | et2online.com