

BAU 28 PENDANT

PRODUCT FEATURES

- Influenced by the Bauhaus movement with four geometric metal stamped fins housing integrated LEDs providing a generous amount of indirect illumination to any space
- Available in modern finishes
- Complete the look with alternate sized Line-Voltage Pendants, Linear Suspension and Bath Bar
- Includes (2) 6" and (4) 12" rigid stems in coordinating finish. Due to weight, J-Box must hold a minimum of 150 lbs.
- Protected by a 5-year warranty. Please visit the "About Us" Page on techlighting.com for more for warranty details



Nightshade Black

LAMPING

Includes 120-277 volt universal, 74 watt, 1924 delivered lumens, 3000K, 90 CRI LED module. Dimmable with most LED compatible ELV dimmers. Includes (2) 6" and (4) 12" rigid stems in coordinating finish. Can be installed on a sloped ceiling up to 20°.



Nightshade Black

Nightshade Black
3/4

Natural Brass

Natural Brass 3/4

ORDERING INFORMATION

| 700 | SYSTEM | BAU28 | FINISH | LAMP |
|-----|-------------------------------------|-------|--|---|
| | TD LINE-VOLTAGE PENDANTS/SUSPENSION | | NB NATURAL BRASS B NIGHTSHADE BLACK | -LED930 INTEGRATED LED 90 CRI 3000K 120V-277V UNV |

700 _____ BAU28 _____

JOB NAME _____


NOTES _____



BAU 28 PENDANT

SPECIFICATIONS

| | |
|-------------------------------|-------------|
| HARDWARE MATERIAL | Metal |
| SHADE MATERIAL | Aluminum |
| NET WEIGHT | 55 lbs |
| HEIGHT | 28in |
| WIDTH | 28in |
| LENGTH | 28in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | Yes |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 37.5in |
| MAX HANGING HEIGHT | 91.5in |
| TOTAL CORD LENGTH | |
| TOTAL STEM LENGTH | Up to 60in |
| STEM QTY | 6 |
| SLOPED CEILING ADAPTABLE? | Yes 20° Max |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

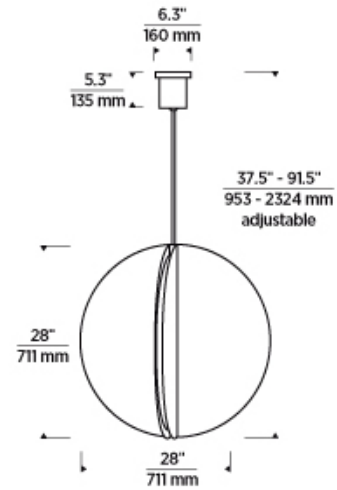

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|---------------------|---------|---------|
| DELIVERED LUMENS | | 1924 | | |
| WATTS | | 74 | | |
| MAX WATTAGE PER BULB | | 74W | | |
| INPUT VOLTAGE | | Universal 120V-277V | | |
| DIMMING TYPE* | | ELV | | |
| CCT | | 3000K | | |
| CRI | | 90 CRI | | |
| LED LIFETIME | | | | |
| L70 | | >50000 | | |
| AVERAGE BULB HOURS | | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | | Integrated LED | | |
| LAMP SHAPE | | Integrated LED | | |
| LAMP INCLUDED? | | True | | |
| WARRANTY** | | 5 Years | | |

*Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|---|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8. | Yes | | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | N/A | | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

