



CRI > 90

SPY 90 ON

3500 K

LED [J] 23.2W / 3284lm / 700mA

REF SP 18° 6 19882 9510 ◇
◇ = B / W

REF FL 30° 6 19882 9520 ◇
◇ = B / W

REF WFL 45° 6 19882 9530 ◇
◇ = B / W

3000 K

LED [J] 23.2W / 3169lm / 700mA

REF SP 18° 6 19882 9310 ◇
◇ = B / W

REF FL 30° 6 19882 9320 ◇
◇ = B / W

REF WFL 45° 6 19882 9330 ◇
◇ = B / W

2700 K

LED [J] 23.2W / 3031 lm / 700mA

REF SP 18° 6 19882 9210 ◇
◇ = B / W

REF FL 30° 6 19882 9220 ◇
◇ = B / W

REF WFL 45° 6 19882 9230 ◇
◇ = B / W

ADJUSTABLE 0-90° / 355°

3.1 IP20 DAMP

REQUIREMENT


SPY 90 TUBE ▶ 19810 0170 ◇
◇ = B / FBR / FG / GC / W

OPTIONS

SPY 90 REFLECTOR 18° ▶ 24611 0020
 SPY 90 REFLECTOR 30° ▶ 24611 0030
 SPY 90 REFLECTOR 45° ▶ 24611 0040
 MUD KIT 1 ▶ 6 207 02 01
 COVERPLATE R 118 ▶ 6 204 00 118 ◇
 ◇ = B / W

ACCESSORIES

HONEYCOMB 75 SINGLE USE ▶ 19810 0110 B
 GLASS SBL 75 ▶ 19810 0130
 LINEAR SPREAD LENS 75 ▶ 19810 0140
 SOFTENING LENS 75 ▶ 19810 0150
 SPREAD LENS 75 ▶ 19810 0160
 HONEYCOMB 75 DOUBLE USE ▶ 19810 0120 B

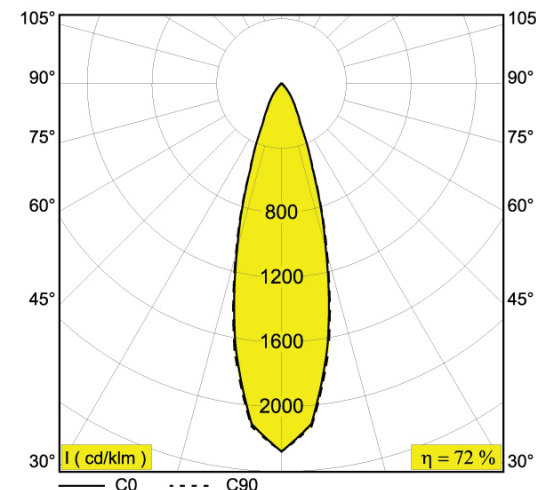

⁽¹⁾Values based on 3000K white finish 30°

Application

For indoor use only

Color Finish

B - Black
 FBR - Flemish Bronze
 FG - Flemish Gold
 GC - Gold Colored Anodized
 W - White

Light Source

One Max. 23.2W LED included

Delivered Lumens

2384lm at 3500K⁽¹⁾ at 700mA and 18°
 3256lm at 3500K⁽¹⁾ at 700mA and 30°
 2322lm at 3500K⁽¹⁾ at 700mA and 45°
 2287lm at 3000K⁽¹⁾ at 700mA and 18°
 2273lm at 3000K⁽¹⁾ at 700mA and 30°
 2241lm at 3000K⁽¹⁾ at 700mA and 45°
 2187lm at 2700K⁽¹⁾ at 700mA and 18°
 2174lm at 2700K⁽¹⁾ at 700mA and 30°
 2144lm at 2700K⁽¹⁾ at 700mA and 45°

Power Supply

Included 0-10V dimming LED power supply 120-277V / 60Hz

Specification features

Suitable for dry and damp location
 Weight: 3.1lbs

