



CRI > 90

NEEDLE 1

3500  
K

LED [E] 4.1W / 420lm / 350mA  
LED [E] 6W / 570lm / 500mA  
LED [E] 8.7W / 726lm / 700mA



**6 25010 9510** ◇

◇ = FG / BBR



**6 25010 9520** ◇

◇ = FG / BBR

3000  
K

LED [E] 4.1W / 380lm / 350mA  
LED [E] 6W / 515lm / 500mA  
LED [E] 8.7W / 673lm / 700mA



**6 25010 9310** ◇

◇ = FG / BBR



**6 25010 9320** ◇

◇ = FG / BBR

2700  
K

LED [E] 4.1W / 355lm / 350mA  
LED [E] 6W / 481lm / 500mA  
LED [E] 8.7W / 629lm / 700mA



**6 25010 9210** ◇

◇ = FG / BBR



**6 25010 9220** ◇

◇ = FG / BBR



NON ADJUSTABLE

0.7 IP20 DAMP

REQUIREMENT

LED POWER SUPPLY 350 / 500 / 700mA-DC (REMOTE)

Ø108mm  
Ø4"-1/4

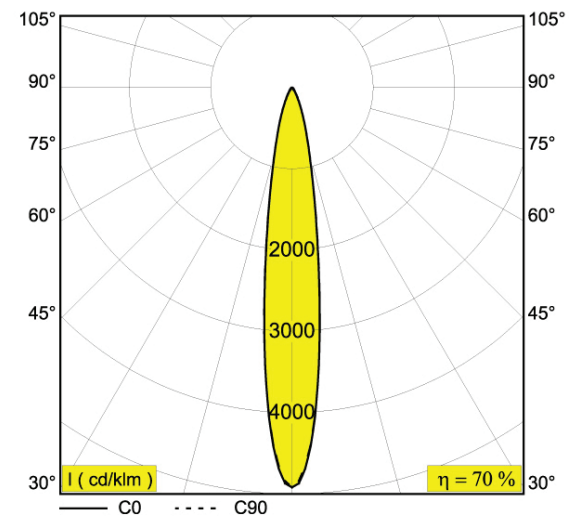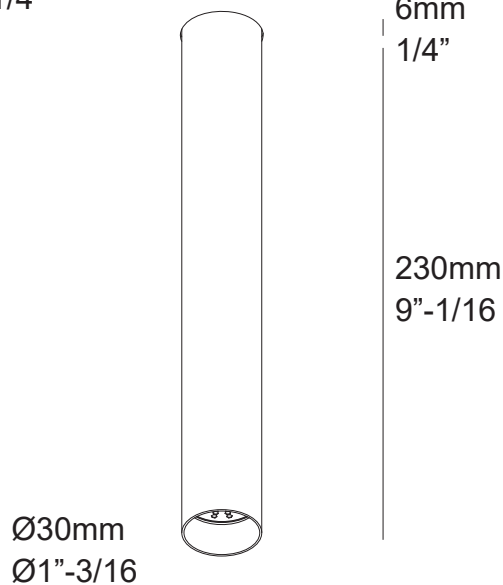

<sup>(1)</sup>Values based on 3000K 13° standard finish

Application

Ceiling surface suspended  
Installation to a standard 4" octagonal junction box  
For indoor use only

Color Finish

BBR - Black Bronze  
FG - Flemish Gold

Light Source

One Max. 8.7W LED included

Delivered Lumens

337lm at 2700K<sup>(1)</sup> at 500mA / 441lm at 700mA at 13°  
351lm at 2700K<sup>(1)</sup> at 500mA / 460lm at 700mA at 33°  
361lm at 3000K<sup>(1)</sup> at 500mA / 472lm at 700mA at 13°  
351lm at 3000K<sup>(1)</sup> at 500mA / 493lm at 700mA at 33°  
389lm at 3500K<sup>(1)</sup> at 500mA / 508lm at 700mA at 13°  
405lm at 3500K<sup>(1)</sup> at 500mA / 529lm at 700mA at 33°

Power Supply

Remote Installation

Specification features

Housing fabricated of powder coated steel, powder coated steel trim  
Suitable for dry and damp location  
Weight: 0.7lbs

PROJECT INFO

Date

---

Client

---


Project Name

---


Type/Quantity

---

REMOTE POWER SUPPLY

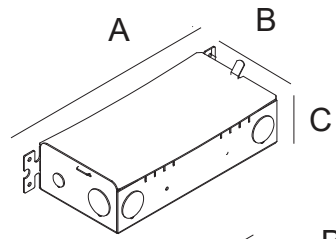

ED1 / ED12:  
 A: 9"-11/16 x B: 4"5/16 x C: 2"-13/16  
 A: 246mm x B: 109mm x C: 72mm

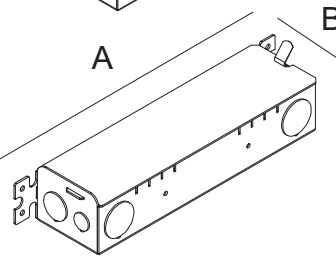

ED8 / ED13 / ED7:  
 A: 9"-11/16 x B: 2"-9/32 x C: 2"-1/2  
 A: 246mm x B: 66mm x C: 63mm



LED POWER SUPPLY REMOTE

Code	Description	MIN-MAX
6 300 44 ED1	LED POWER SUPPLY 350mA-DC 19W 0-10V Dim 120-277V Remote	4
6 300 45 ED1	LED POWER SUPPLY 500mA-DC 25W 0-10V Dim 120-277V Remote	3
6 300 53 ED1	LED POWER SUPPLY 700mA-DC 38W 0-10V Dim 120-277V Remote	4
6 300 14 ED7	LED POWER SUPPLY Multi-Power 15W 0-10V Push Dim 120-277V Remote	3/2/1
6 300 46 ED8	LED POWER SUPPLY 350mA-DC 11W Mains Dim 120V Remote	2
6 300 90 ED8	LED POWER SUPPLY 500mA-DC 12W Mains Dim 120V Remote	1
6 300 62 ED8	LED POWER SUPPLY 500mA-DC 23W Mains Dim 120V Remote	2 -> 3
6 300 21 ED8	LED POWER SUPPLY 700mA-DC 32W Mains Dim 120V Remote	2 -> 3
6 300 70 ED12	LED POWER SUPPLY 350mA-DC 13W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	2 -> 3
6 300 72 ED12	LED POWER SUPPLY 500mA-DC 19W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	2 -> 2
6 300 74 ED12	LED POWER SUPPLY 700mA-DC 27W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	2 -> 2
6 300 41 ED13	LED POWER SUPPLY 350mA-DC 19W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	4
6 300 51 ED13	LED POWER SUPPLY 500mA-DC 20W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	3
6 300 88 ED13	LED POWER SUPPLY 700mA-DC 20W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	2
6 300 81 ED13	LED POWER SUPPLY 700mA-DC 35W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	3 -> 3
6 300 15	LED POWER SUPPLY Multi-Power 15W 120-277V Remote	3/2/1

<sup>1</sup>DIMMING: Lutron Hi-lume 1% EcoSystem LED driver with Softon, Fade-to-Black dimming technology - PEQ1E  
<sup>2</sup>DIMMING: Lutron Hi-lume 1% 2-wire (120V forward phase only) - LTEA2W



**CRI > 90** **NEEDLE 1**

**3500 K**  
 2 x LED [E] 4.1W / 420lm / 350mA  
 2 x LED [E] 6W / 570lm / 500mA  
 2 x LED [E] 8.7W / 726lm / 700mA

LENS SP 13° **6 25012 9510** ◇  
 ◇ = FG / BBR

LENS SP 33° **6 25012 9520** ◇  
 ◇ = FG / BBR

**3000 K**  
 2 x LED [E] 4.1W / 380lm / 350mA  
 2 x LED [E] 6W / 515lm / 500mA  
 2 x LED [E] 8.7W / 673lm / 700mA

LENS SP 13° **6 25012 9310** ◇  
 ◇ = FG / BBR

LENS SP 33° **6 25012 9320** ◇  
 ◇ = FG / BBR


**2700 K**  
 2 x LED [E] 4.1W / 355lm / 350mA  
 2 x LED [E] 6W / 481lm / 500mA  
 2 x LED [E] 8.7W / 629lm / 700mA

LENS SP 13° **6 25012 9210** ◇  
 ◇ = FG / BBR

LENS SP 33° **6 25012 9220** ◇  
 ◇ = FG / BBR

NON ADJUSTABLE  
 1.3 IP20 DAMP

**REQUIREMENT**  
 LED POWER SUPPLY 350 / 500 / 700mA-DC (REMOTE)

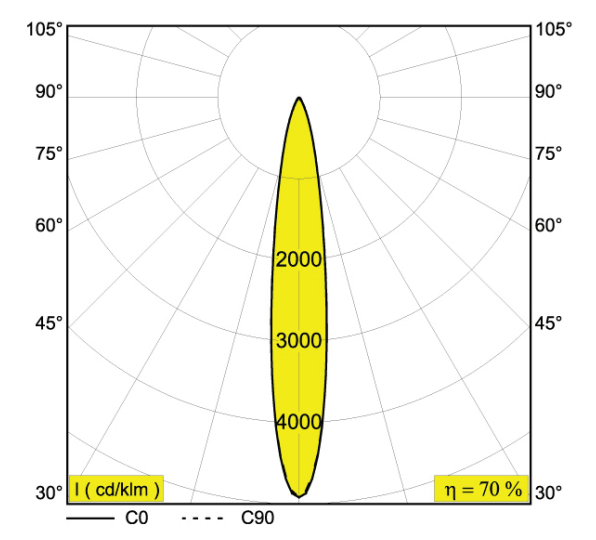

<sup>(1)</sup>Values based on 3000K 13° standard finish

**Application**  
 Ceiling surface suspended  
 Installation to a standard 4" octagonal junction box  
 For indoor use only


**Color Finish**  
 BBR - Black Bronze  
 FG - Flemish Gold

**Light Source**  
 Two Max. 8.7W LED included

**Delivered Lumens**  
 674lm at 2700K<sup>(1)</sup> at 500mA / 8821lm at 700mA at 13°  
 702lm at 2700K<sup>(1)</sup> at 500mA / 920lm at 700mA at 33°  
 722lm at 3000K<sup>(1)</sup> at 500mA / 944lm at 700mA at 13°  
 702lm at 3000K<sup>(1)</sup> at 500mA / 986lm at 700mA at 33°  
 778lm at 3500K<sup>(1)</sup> at 500mA / 1016lm at 700mA at 13°  
 810lm at 3500K<sup>(1)</sup> at 500mA / 1058lm at 700mA at 33°

**Power Supply**  
 Remote Installation

**Specification features**  
 Housing fabricated of powder coated steel, powder coated steel trim  
 Suitable for dry and damp location  
 Weight: 1.3bs

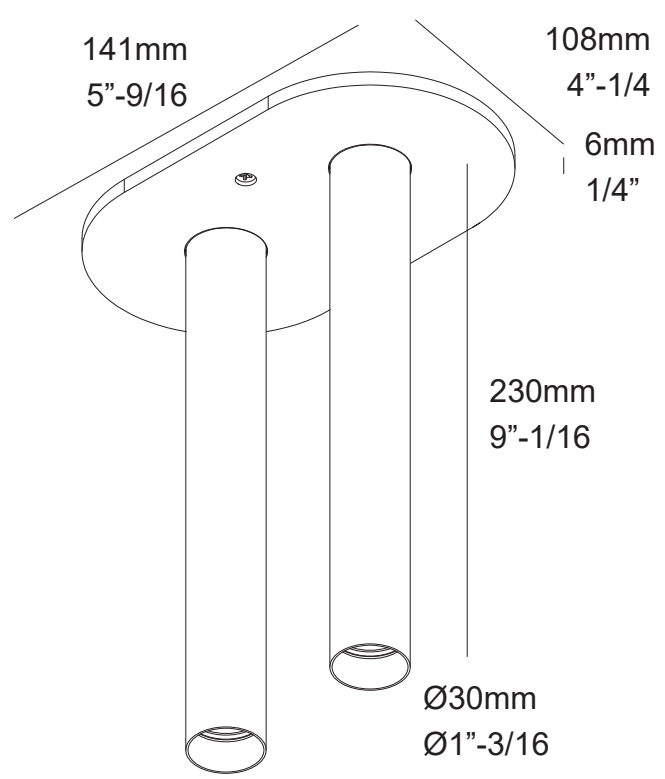

**PROJECT INFO**


Date \_\_\_\_\_

Client \_\_\_\_\_


Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_

REMOTE POWER SUPPLY

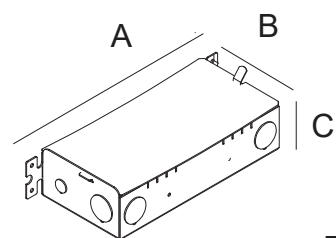

ED1 / ED12:  
A: 9"-11/16 x B: 4"5/16 x C: 2"-13/16  
A: 246mm x B: 109mm x C: 72mm

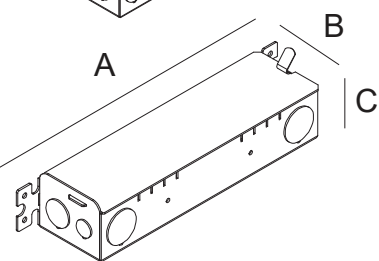

ED8 / ED13 / ED7:  
A: 9"-11/16 x B: 2"-9/32 x C: 2"-1/2  
A: 246mm x B: 66mm x C: 63mm



LED POWER SUPPLY REMOTE

Code	Description	MIN-MAX
6 300 44 ED1	LED POWER SUPPLY 350mA-DC 19W 0-10V Dim 120-277V Remote	2
6 300 45 ED1	LED POWER SUPPLY 500mA-DC 25W 0-10V Dim 120-277V Remote	1
6 300 53 ED1	LED POWER SUPPLY 700mA-DC 38W 0-10V Dim 120-277V Remote	2
6 300 14 ED7	LED POWER SUPPLY Multi-Power 15W 0-10V Push Dim 120-277V Remote	1/1/0
6 300 46 ED8	LED POWER SUPPLY 350mA-DC 11W Mains Dim 120V Remote	1
6 300 62 ED8	LED POWER SUPPLY 500mA-DC 23W Mains Dim 120V Remote	1
6 300 21 ED8	LED POWER SUPPLY 700mA-DC 32W Mains Dim 120V Remote	1
6 300 70 ED12	LED POWER SUPPLY 350mA-DC 13W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	1
6 300 72 ED12	LED POWER SUPPLY 500mA-DC 19W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	1
6 300 74 ED12	LED POWER SUPPLY 700mA-DC 27W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	1
6 300 41 ED13	LED POWER SUPPLY 350mA-DC 19W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	2
6 300 51 ED13	LED POWER SUPPLY 500mA-DC 20W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	1
6 300 88 ED13	LED POWER SUPPLY 700mA-DC 20W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	1
6 300 81 ED13	LED POWER SUPPLY 700mA-DC 35W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	1
6 300 15	LED POWER SUPPLY Multi-Power 15W 120-277V Remote	1/1/0

<sup>1</sup>DIMMING: Lutron Hi-lume 1% EcoSystem LED driver with Softon, Fade-to-Black dimming technology - PEQ1E

<sup>2</sup>DIMMING: Lutron Hi-lume 1% 2-wire (120V forward phase only) - LTEA2W