


BULL PRECISION PENDANT

design: Lapo Grassellini



Supply current
 Courant d'alimentation
 Corriente de alimentación


120VAC
120VAC
120VAC

Power
 Pouissance
 Potencia

10W
20W
30W



Photometric diagrams

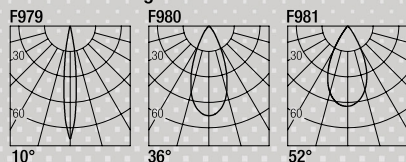

10W		
CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

20W		
CCT	Flux	CRI
2700K	1700 lm	98+
3000K	1830 lm	98+
3500K	1890 lm	98+
4000K	1950 lm	98+

30W		
CCT	Flux	CRI
2700K	2187 lm	98+
3000K	2310 lm	98+
3500K	2469 lm	98+
4000K	2538 lm	98+



Code Construction

Construction du code produit
 Construcción del código de producto

BPP₁X₁X₁XX₉X₁

BPP	X	Power Pouissance Potencia	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 10W		1 White Blanc Blanco		27 2700K			S 10°
		2 20W		5 Black Noir Negro		30 3000K			M 36°
		3 30W				35 3500K			W 52°
						40 4000K			
						CU Custom			

BUX2NA - Included With Assembly

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia



Drivers
 Alimentateurs
 Alimentadores

Integral
 ELV or 0-10V (Dual Dimming)
 - Remote located driver option available