


KELLER D


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
24VDC

Power
 Pouissance
 Potencia
2 X 7W



Photometric diagrams

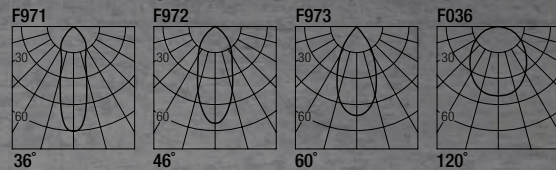

CCT	Flux _(x2)	CRI
2700K	590 lm	98+
3000K	650 lm	98+
3500K	660 lm	98+
4000K	670 lm	98+



Code Construction

Construction du code produit
 Construcción del código de producto

KE1 X XX 9 X


KE2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz	X	Beam angle Angle de faisceau Ángulo del haz	
	2	Aluminum Aluminium Aluminio	27	2700K		S	36°		S	36°
	5	Black Noir Negro	30	3000K		M	46°		M	46°
	6	Bronze Bronce	35	3500K		W	60°		W	60°
			40	4000K		X	120°		X	120°
			CU	Custom						

Drivers

Alimentateurs
 Alimentadores

Parallel wiring

Câblage en parallèle
 Cableado en paralelo



0-10V

DL010-024-100VD

100W CV 0-10V Dimming
 Dimming Range: 1%

Min. 1/Max. 5 Fixtures per Driver

Phase

DLELD-024-100W

96W Constant Voltage
 Dimming Range: 10%

Min. 1/Max. 5 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.CV.1

Hi-Lume 2-Wire Phase
 40W Constant Voltage
 Dimming Range: 1%

Min. 1/Max. 2 Fixtures per Driver

LTEA.CV.2

Hi-Lume 2-Wire Phase
 96W Constant Voltage
 Dimming Range: 1%

Min. 1/Max. 5 Fixtures per Driver

Lutron Ecosystem

LDE.CV.1

Hi-Lume Ecosystem
 40W Constant Voltage
 Dimming Range: 1%

Min. 1/Max. 2 Fixtures per Driver

LDE.CV.2

Hi-Lume Ecosystem
 96W Constant Voltage
 Dimming Range: 1%

Min. 1/Max. 5 Fixtures per Driver

Optionals - Accessoires - Accesorios

LOD1

Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria