



USURBANP

Design by Dima Loginoff

Collection consisting of aluminium ceiling lamps and suspended lamps.

Available in several colours and sizes.

Typology: SUSPENSION LAMP

Ratings


- Built in line voltage **LED** module
- CCT 3000 K
- Downlight
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off, dimmable ELV trailing edge phase cut
- Aluminum body, painted
- Opalescent diffuser

US URBAN P

lb 4.18 ft³ 0.70

Product code composition

URBAN / downward lighting only

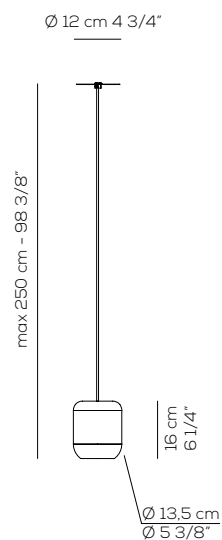


Type	Article	Colours	Finishing	Source
US	URBAN P	BC wrinkled white BR matt bronze NI matt nickel	XX	LED 15W - diffused beam 3000K*, 2700K, 4000K

DRY LOCATION CRI90 dimmable ELV TRAILING EDGE PHASE CUT 120VAC **LED** ~ 1350 lm* 90 lm/W*

example composition code US URBANP BR XX LED

Available colors

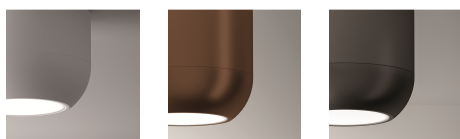

BC
Wrinkled
white

BR
Matt
bronze

NI
Matt
nickel

USURBANP__XXLED

CUSTOMER _____ NOTES _____

NOTICE:

Luminous flux for all LED luminaires is shown at source level.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.