


ZIRKOL – S

ZIRKOL-S is a family of polygonal suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included.

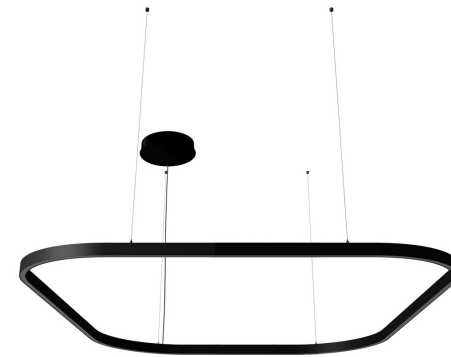

SQUARE 59"X59" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused oriented
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	4432lm
Typ CRI	90
IP class	IP40
Dimensions	59"x59"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled



Codes

UZRQ1606G15DBO
UZRQ1606G15DNE
UZRQ1606G15DOR

Structure

matt white
matt black
matt gold

Certificazioni

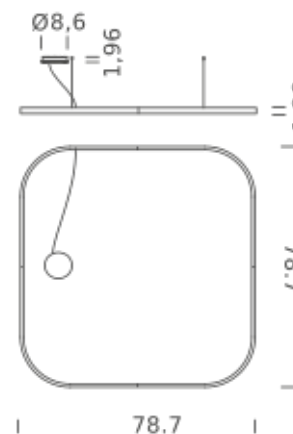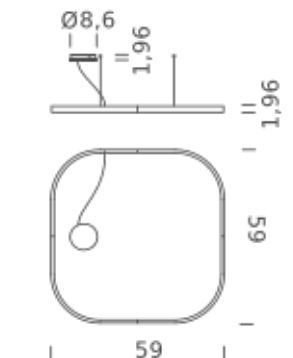

SQUARE 59"X59" | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	4692lm
Typ CRI	90
IP class	IP40
Dimensions	59"x59"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled



Codes

UZRQ1606G15WBO
UZRQ1606G15WNE
UZRQ1606G15WOR

Structure

matt white
matt black
matt gold

Certificazioni

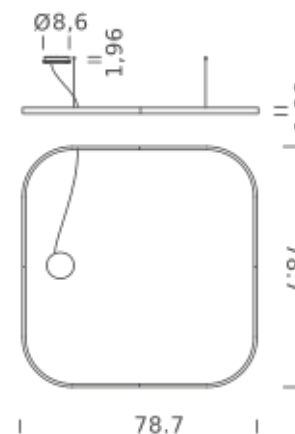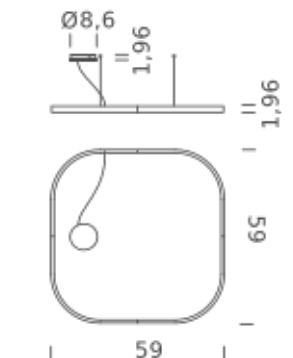

SQUARE 59"X59" | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	5214lm
Typ CRI	90
IP class	IP40
Dimensions	59"x59"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled



Codes

UZRQ1606G15NBO
UZRQ1606G15NNE
UZRQ1606G15NOR

Structure

matt white
matt black
matt gold

Certificazioni

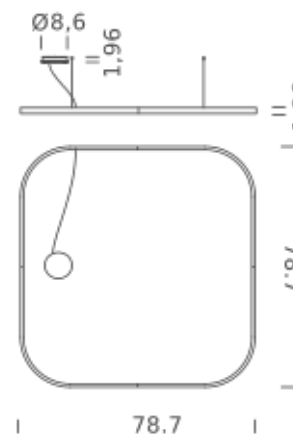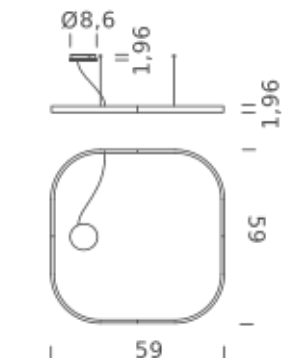

SQUARE 78.7"X78.7" | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	100W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	2700K
Luminous flux	6098lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled



Codes

UZRQ1608G15DBO
UZRQ1608G15DNE
UZRQ1608G15DOR

Structure

matt white
matt black
matt gold

Certificazioni

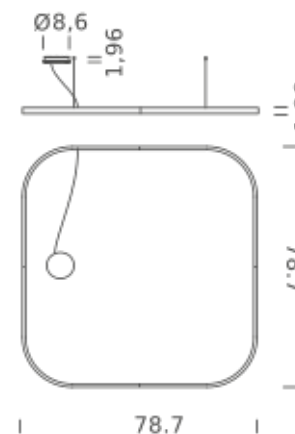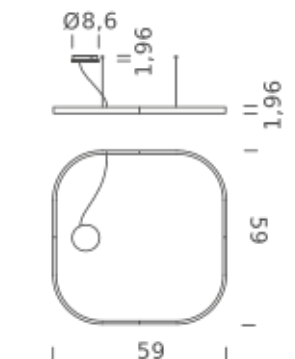

SQUARE 78.7"X78.7" | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	100W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	3000K
Luminous flux	6456lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled



Codes

UZRQ1608G15WBO
UZRQ1608G15WNE
UZRQ1608G15WOR

Structure

matt white
matt black
matt gold

Certificazioni

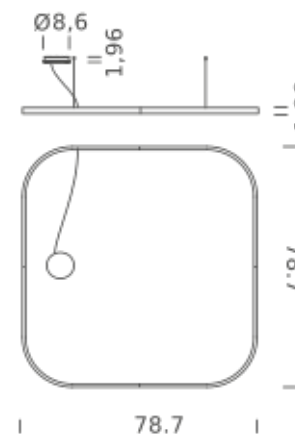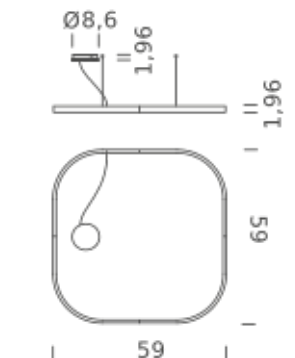

SQUARE 78.7"X78.7" | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	100W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	110/240V
Color temperature	4000K
Luminous flux	7174lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black RAL 9016 white shipped assembled

Codes

UZRQ1608G15NBO
UZRQ1608G15NNE
UZRQ1608G15NOR

Structure

matt white
matt black
matt gold

Certificazioni

