
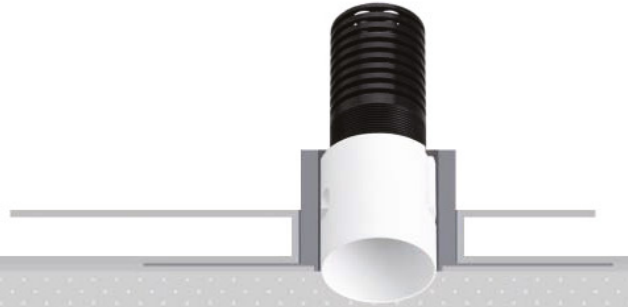


# ZERO R6


design: Roberto Mantovani

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V, 8.7V)**

**Power**  
 Poissance  
 Potencia  
**4.5W**



## Photometric diagrams

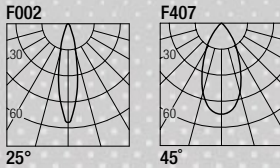

CCT	Flux	CRI
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+

## Code Construction

Construction du code produit  
 Construcción del código de producto

**ZW1 | X | X | XX | E |**


ZW1	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	White Blanc Blanco	1	25°	27	2700K	
	5	Black Noir Negro	2	45°	30	3000K	
					35	3500K	
					40	4000K	
					CU	Custom	

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



0-10V

## FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.1%  
**Min. 1/Max. 6 Fixtures per Driver**

Phase

## FLEXA-12-500-CC-ELV

12W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 1/Max. 2 Fixtures per Driver**

## FLEXA-23-500-CC-ELV

23W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 3/Max. 5 Fixtures per Driver**

Lutron 2-Wire Phase

Hi-Lume 2-Wire Phase / 500mA Constant Current / Dimming Range: 1%

## LTEA.1

**Min. 1/Max. 2**  
**Fixtures per Driver**

## LTEA.2

**Min. 2/Max. 4**  
**Fixtures per Driver**

## LTEA.3

**Min. 4/Max. 6**  
**Fixtures per Driver**

Lutron Ecosystem

## LDE.1


Hi-Lume Ecosystem  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 2/Max. 3 Fixtures per Driver**

## LDE.2

Hi-Lume Ecosystem Premier  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 4/Max. 5 Fixtures per Driver**

## MP-R045


Mounting Plate  
 with 45mm Hole

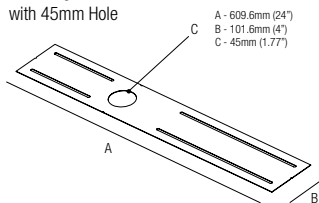

## T-BAR Installation

## R01045

Mounting Plate  
 with 45mm Hole

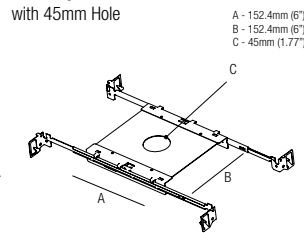


## IC Housings

## IC064R01045

Recessed Box for  
 Insulated Ceiling with  
 45mm Hole

## AT064R01045

Air Tight Recessed Box  
 for Insulated Ceiling with  
 45mm Hole

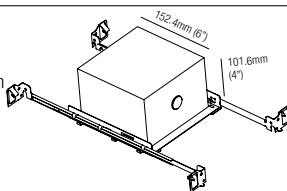


## Accessories - Accessoires - Accesorios

## ZQC001

### Plasterboard recessing frame

Boîtier d'encastrement  
 pour plaques de plâtre  
 Cajetín para placas  
 de yeso

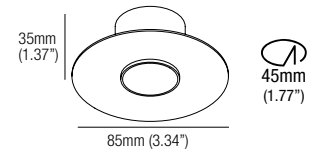

## L001

### Low luminance louvre

Filtre basse luminance  
 Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria