



UPBEL060
Design by Manuel Vivian

Collection consisting of ceiling lamps and suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: CEILING

- Ratings**
- E26 or 2GX11 or GU24 LED
 - Diffused light
 - Surface installation over holes
 - Power supply 120V AC
 - Switch mode: on-off
 - Steel frame


- GU24 LED VERSION**
- CCT 2700 K, CRI 80
 - Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser INCLUDED


Type	Article	Colours	Finish	Source
UP	BEL 060 E26	BC white	XX	E26 3 x Max 17W LED or 3 x Max 20W fluo
		BEL 060 LED		BW warm white
	GI gold yellow			
	NE black			
	RS red			

lb 8.81 ft³ 6.35



example composition code | UP | BEL060LED | GI | XX

Available colors

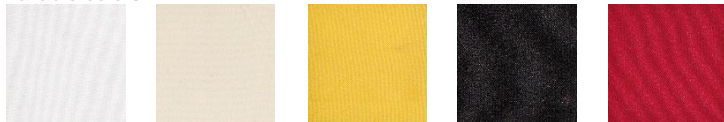

BC White BW Warm white GI Gold yellow NE Black RB Burgundy

UPBEL060_ _ _ _ _XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.