



UPBEL180
Design by Manuel Vivian

Collection consisting of ceiling lamps and suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: CEILING

Ratings

- E26 or GU24 LED
- Diffused light
- Surface installation over holes
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

GU24 LED VERSION


- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser INCLUDED

Type	Article	Colours	Finish	Source
UP	BEL 180 E26	BC white	XX	E26 4 x Max 17W LED or 4 x Max 26W fluo
		BEL 180 LED		BW warm white
	GI gold yellow	NE black		
	RS red			

lb 59.52 ft³ 93.23




Ø 180 cm - 70 7/8"



DRY LOCATION

example composition code | UP | BEL180 LED | GI | XX

Available colors

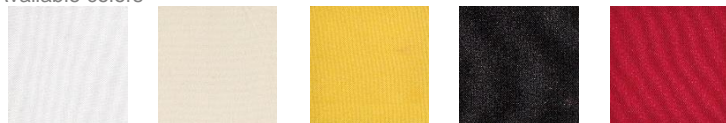

BC
White

BW
Warm white

GI
Gold yellow

NE
Black

RB
Burgundy

UPBEL180_ _ _ _ _XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.