



USBEL118
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

Ratings

- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

L10 BUILT IN LED MODULE VERSION

- CCT 3000 K, CRI 90
- Power supply 120/277V AC
- Dimmable 0-10V


GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

Product code composition

BELL / diffuser INCLUDED, with upward and downward lighting


Type	Article	Colours	Finish	Source
US	BEL 118 E26	BC white	XX	E26 4 x Max 17W LED or 4 x Max 26W fluo
	BEL 118 LED	BW warm white		LED GU24 4x15W - included 120V _{AC} - CRI80 diffused beam - 2700K 6400 lm - 107 lm/W
		GI gold yellow		dimming ELV TRAILING EDGE PHASE CUT LED
BEL 118 L10	NE black		L10 95W LED - integrated 120/277V _{AC} - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W	
	RS red		dimming 0-10V LED	

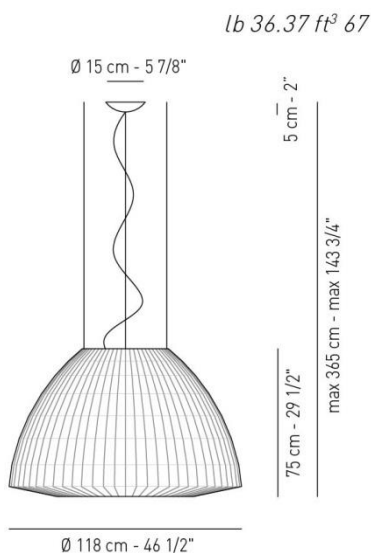

DRY LOCATION

example composition code | US | BEL118LED | GI | XX

Available colors

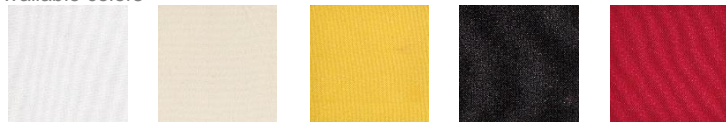

BC White BW Warm white GI Gold yellow NE Black RB Burgundy

USBEL118 ____XX

CUSTOMER _____

NOTES _____

Luminous flux for all built-in LED luminaires is shown at source level.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.