



USBEL180
Design by Manuel Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colors and sizes.

Typology: SUSPENDED

Ratings

- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

FLE VERSION

- Power supply 120/277V AC

L10 BUILT IN LED MODULE VERSION

- CCT 3000 K, CRI 90
- Power supply 120/277V AC
- Dimmable 0-10V


GU24 LED VERSION

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut

Product code composition

BELL / diffuser INCLUDED, with upward and downward lighting

| Type | Article | Colours | Finish | Source |
|--------------------|--------------------|-----------------------|-----------|--|
| US | BEL 180 E26 | BC white | XX | E26 5 x Max 17W LED or 5 x Max 26W fluo |
| | BEL 180 LED | BW warm white | | LED GU24 5x15W - included 120VAC - CRI80 diffused beam - 2700K 8000 lm - 107 lm/W - + dimmable ELV TRAILING EDGE PHASE CUT LED |
| | | GI gold yellow | | |
| BEL 180 L10 | NE black | | | L10 95W LED - integrated 120/277VAC - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W - + dimmable 0-10V LED |
| | RS red | | | |

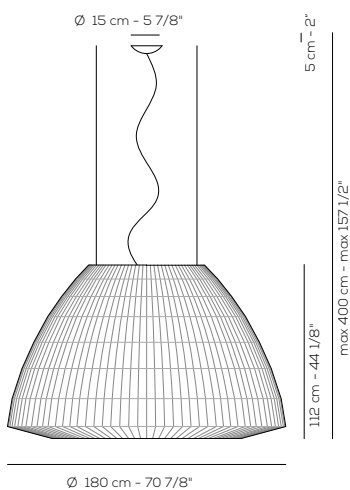

DRY LOCATION

example composition code | **US** | **BEL180LED** | **GI** | **XX**

Available colors



USBEL180_ _ _ _ _XX CUSTOMER _____ NOTES _____

NOTICE: Luminous flux for all LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.