WALL



DESCRIPTION

Dual square profile linear aluminum arms with rectangular wall mount. Inset opal polymeric diffusers. Finely textured plate or powder-coated finish. Wall emitting lights with rotational adjustment.







SPECIFICATION DETAILS

 $\ensuremath{^{\star}}$ For custom options, consult factory for details.

| Fixture Dimensions | W50" x H4-5/8" x E3-7/8" |
|------------------------|--|
| Light Source | LED with DC Driver |
| Wattage | 45W |
| Total Lumens | 2980lm |
| Delivered Lumens | BK-1585lm; BN-1410lm*; GD-1160lm*; WH-2187lm; |
| Voltage | 120V |
| Color Temperature | 3000K |
| CRI (Ra) | 90CRI |
| Optional Color Temps | 2700K - 5000K Available, Minimum Order Quantities Apply |
| LED Rated Life | 50,000 hours |
| Dimming | 100% - 10%, TRIAC or ELV Dimmer (Not Included) |
| Diffuser Details | White Acrylic Diffuser |
| ADA Compliant | Yes |
| Location | Dry |
| Compliance | ADA |
| Warranty | 5 Years |
| Illumination Direction | Fontlight Illumination |
| Mounting Style | All Orientation; Wall; |
| Canopy Dimensions | W3" x H5-1/8" x E1-5/8" |
| | |

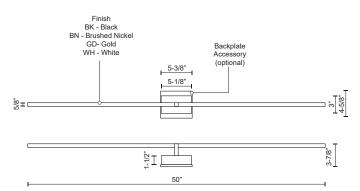



19054 28TH AVENUE SURREY - BC V3Z 6M3 CANADA COMMENT



