

FM-4207


Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# Argo

FM-4207

**PRODUCT DESCRIPTION**

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

**FEATURES**

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

**SPECIFICATIONS**

<b>Rated Life</b>	60000 Hours
<b>Standards</b>	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
<b>Input</b>	120 VAC, 120-277V, 50/60Hz
<b>Driver Dimension</b>	2.0" x 1.4" x 1.0"
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-5%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	3000K, 3500K, 2700K
<b>CRI</b>	90
<b>Construction</b>	Aluminum body with acrylic diffuser


**REPLACEMENT PARTS**

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4207 7"	2700K 90	BK Black	14.9W	120-277V	1391	994
	2700K 90	BN Brushed Nickel	14.9W	120-277V	1391	994
	2700K 90	WT White	14.9W	120-277V	1391	994
	3500K 90	BK Black	14.9W	120-277V	1391	1029
	3500K 90	BN Brushed Nickel	14.9W	120-277V	1391	1029
	3500K 90	WT White	14.9W	120-277V	1391	1029
	3000K 90	BK Black	14.9W	120 VAC	1391	1002
	3000K 90	BN Brushed Nickel	14.9W	120 VAC	1391	1002
	3000K 90	WT White	14.9W	120 VAC	1391	1002

Example: **FM-4207-WT**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

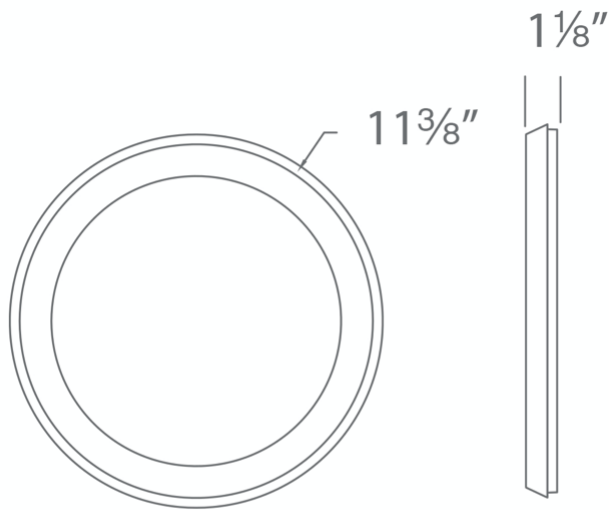

FM-4211


Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# Argo

FM-4211

**PRODUCT DESCRIPTION**

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

**FEATURES**

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

**SPECIFICATIONS**

<b>Rated Life</b>	60000 Hours
<b>Standards</b>	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
<b>Input</b>	120 VAC, 120-277V, 50/60Hz
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-5%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	3500K, 3000K, 2700K
<b>CRI</b>	90
<b>Construction</b>	Aluminum body with acrylic diffuser
<b>Driver Dimension</b>	2.0" x 1.4" x 1.0"


**REPLACEMENT PARTS**

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4211 11"	2700K 90	BK Black	20.6W	120-277V	2109	1461
	2700K 90	BN Brushed Nickel	20.6W	120-277V	2109	1461
	2700K 90	WT White	20.6W	120-277V	2109	1461
	3500K 90	BK Black	20.6W	120-277V	2109	1472
	3500K 90	BN Brushed Nickel	20.6W	120-277V	2109	1472
	3500K 90	WT White	20.6W	120-277V	2109	1472
	3000K 90	BK Black	19.8W	120 VAC	2109	1521
	3000K 90	BN Brushed Nickel	19.8W	120 VAC	2109	1521
	3000K 90	WT White	19.8W	120 VAC	2109	1521

Example: **FM-4211-WT**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

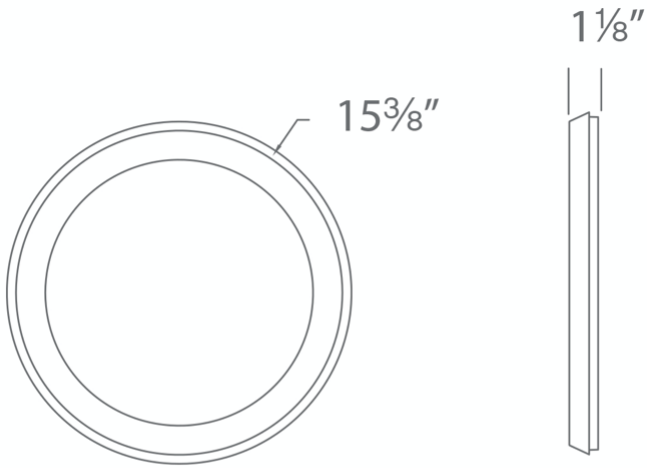

FM-4215


Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



## Argo

FM-4215

**PRODUCT DESCRIPTION**

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

**FEATURES**

- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

**SPECIFICATIONS**

<b>Rated Life</b>	60000 Hours
<b>Standards</b>	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
<b>Input</b>	120 VAC, 120-277V, 50/60Hz
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-5%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	2700K, 3500K, 3000K
<b>CRI</b>	90
<b>Construction</b>	Aluminum body with acrylic diffuser
<b>Driver Dimension</b>	2.0" x 1.4" x 1.0"

**REPLACEMENT PARTS**

HDW-LX20-MA - Hardware Pack

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4215 15"	2700K 90	BK Black	27.5W	120-277V	3084	2114
	2700K 90	BN Brushed Nickel	27.5W	120-277V	3084	2114
	2700K 90	WT White	27.5W	120-277V	3084	2114
	3500K 90	BK Black	27.5W	120-277V	3084	2278
	3500K 90	BN Brushed Nickel	27.5W	120-277V	3084	2278
	3500K 90	WT White	27.5W	120-277V	3084	2278
	3000K 90	BK Black	26.2W	120 VAC	3084	2221
	3000K 90	BN Brushed Nickel	26.2W	120 VAC	3084	2221
	3000K 90	WT White	26.2W	120 VAC	3084	2221

Example: **FM-4215-WT**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)




Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Argo

FM-4219

**PRODUCT DESCRIPTION**

A simple and perfect form. Round out your lighting design with this luminaire that flush mounts directly to your ceiling or wall for a clean look and super illumination, thanks to advanced technology featuring efficient LED lighting. A curvaceous silhouette that will brighten your social circle.

**FEATURES**


- Driver concealed within the fixture
- 1" profile, edge-lit illumination
- The integrated driver is inside of fixture

**SPECIFICATIONS**

<b>Rated Life</b>	60000 Hours
<b>Standards</b>	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0
<b>Input</b>	120-277V, 50/60Hz
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-5%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	3500K, 2700K, 3000K
<b>CRI</b>	90
<b>Construction</b>	Aluminum body with acrylic diffuser
<b>Driver Dimension</b>	2.0" x 1.4" x 1.0"

**REPLACEMENT PARTS**

HDW-LX20-MA - Hardware Pack

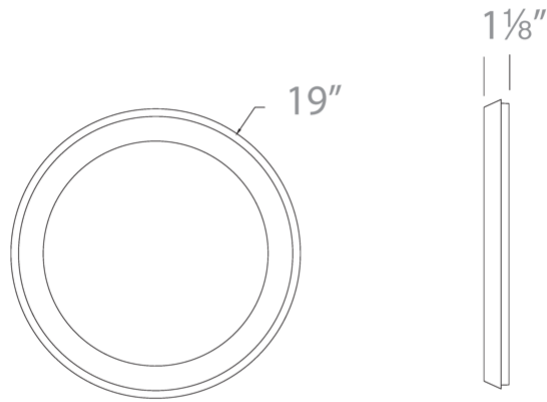

FM-4219

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
FM-4219 19"	2700K 90	BK Black	32.7W	120-277V	3985	2214
	2700K 90	BN Brushed Nickel	32.7W	120-277V	3985	2214
	2700K 90	WT White	32.7W	120-277V	3985	2214
	3500K 90	BK Black	32.7W	120-277V	3985	2389
	3500K 90	BN Brushed Nickel	32.7W	120-277V	3985	2389
	3500K 90	WT White	32.7W	120-277V	3985	2389
	3000K 90	BK Black	31W	120-277V	3985	2870
	3000K 90	BN Brushed Nickel	31W	120-277V	3985	2870
	3000K 90	WT White	31W	120-277V	3985	2870

Example: **FM-4219-WT**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)