

# Alphabet Of Light Linear 180 suspension

## SPECIFICATIONS

1205008A



### Design By

BJARKE INGELS GROUP

### Collection

Architectural



### Specifications

Delivered lumens	5226lm
Light output ratio	104.5lm/W
Power consumption	50W
Led type	44.8W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	Dimmable 2-Wire / Dimmable 0-10V**
Input Voltage	120-277V
Driver	EFORE - 1 x RCL050-1200A

### Colors & Finishes

- White (Diffuser & Canopy)
- Grey (Body)

### Materials


- Illuminated tubes in opaque injection molded PMMA resin
- 360° light emission
- Aluminum frame suspended by steel cables

### Features & Accessories

- Suitable for damp locations
- Driver is compatible to both 2-wire dimming and 0-10V dimming options

\*\*2-wire only dimmable at 120V

### Dimensions

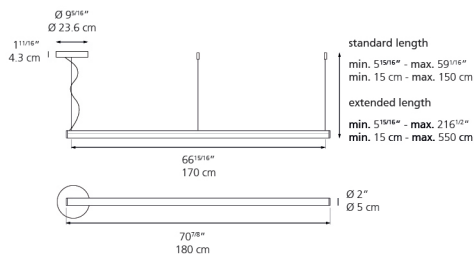

### Packaging

1 Box

1 x 75-11/16" x 12-1/8" x 12-1/8" / 11.6 lbs - 192 cm x 30.5 cm x 30.5 cm / 5.26 kg

### Light distribution

Direct/Indirect

### Luminaire weight

5.95 lbs / 2.7 kg

### Warranty