



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# Stacked

PD-50748

**FEATURES**


- Driver concealed within the canopy
- Silicon diffusers for even illumination
- Rotatable arms and articulating lights adjust 360-degrees for customization
- Slope ceiling adaptable. Hang straight swivels up to 90 degrees
- Three 12" and one 6" down rods included (additional sold separately)

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV, 0-10V
Color Temp	3000K
CRI	90
Construction	Aluminum and Silicon Diffuser

**REPLACEMENT PARTS**

- RPL-ROD-IN06-AL - 6" Rod - AL finish
- RPL-ROD-IN06-BK - 6" Rod - BK finish
- RPL-ROD-IN06-BR - 6" Rod - BR finish
- RPL-ROD-IN12-AL - 12" Rod - AL finish
- RPL-ROD-IN12-BK - 12" Rod - BK finish
- RPL-ROD-IN12-BR - 12" Rod - BR finish

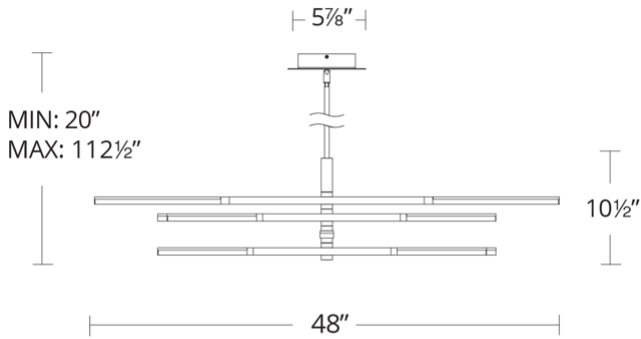

PD-50748

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-50748 48"	3000K	AL Brushed Aluminum	41.6W	4047	2102
	3000K	BK Black	41.6W	4047	2102
	3000K	BR Brushed Brass	41.6W	4047	2102

Example: **PD-50748-BR**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)