

Date \_\_\_\_\_

\_\_\_\_\_

Name \_\_\_\_\_

\_\_\_\_\_

Client \_\_\_\_\_

\_\_\_\_\_

Project name \_\_\_\_\_

\_\_\_\_\_

Quote# \_\_\_\_\_

\_\_\_\_\_

Type/Quantity \_\_\_\_\_

\_\_\_\_\_

## Listings






25/04/2022 15:54:06

# Specification Sheet

## TIGALED 93524 6 223 751 811 952

[Weblink](#)

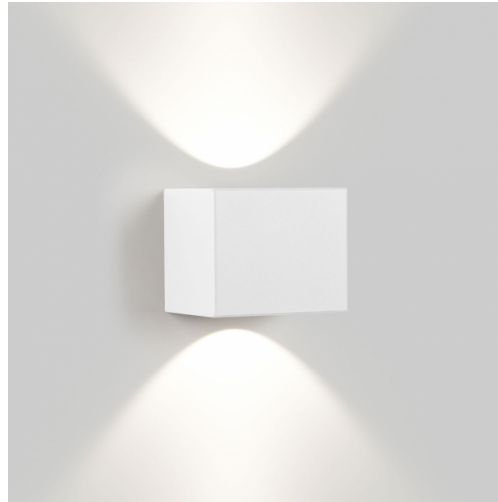

Available colors: ALU GREY (6 223 751 811 952 A)  
 WHITE (6 223 751 811 952 W)  
 GREY BROWN (6 223 751 811 952 G)

2 x REFLECTOR 24°  
 LED 7,1W / CRI>90 / 3500K / 837lm  
 INCL.LED POWER SUPPLY 350mA-DC  
 For other CRI or KELVIN, contact factory

LED Technics: Light source: 837 lm // 7 W // 119 lm/W  
 Luminaire: 545 lm // 8 W // 67 lm/W

120V / 60Hz

Class 2 N.a.  
 Ada Yes  
 Installation methods 1/2" EMT INSTALLATION  
 4" J-BOX

Weight: 2.8 LBS  
 Protection level: IP65 - suitable for wet locations  
 Minimum distance: n.a.

Remarks: For other voltages or dimming options, contact factory.

For detailed installation instructions, please consult the manual. [6\\_223\\_751\\_811\\_XXX\\_HAND.pdf](#)

**TIGALED 93524**  
6 223 751 811 952

**Related project picture of product family:**

