


Pendant Luminaires | 220-240 V  
2 arrayLED 56 W DC - 56 W AC | CRI 90 | Warm Tune  
7697



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	56 W
Source lumens	3580 lm
Frequency	50-60 Hz
CCT / Tone	Warm Tune
Colour rendering index	90 Ra
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Yes
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	23.360 Kg

Finishing casing	
Material	PE
Colour	concrete dark grey
Processing	Coating
Finishing diffuser	
Material	PMMA
Colour	opaline
Processing	Satin finishing
Finishing mounting frame	
Material	Iron
Colour	Embossed white RAL 9003
Processing	Coating

Pendant Luminares | 220-240 V | 2 arrayLED 56 W DC - 56 W AC | CRI 90 | Warm Tune |  
Base  
7697

Single emission pendant luminaires for indoor application. The warm tune LED light source with a general lighting light distribution is composed of 2 arrayled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3580 lm, with a 63.9 lm/W nominal luminous efficacy.

The device body is made of pe and features a concrete dark grey finish, processed by means of coating; the diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 23.360 kg. The power supply driver is included in the delivery.

The total absorbed power is 56 W.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	65 %
Source lumens	3580 lm
Delivered lumens	2342 lm
Consumption	56 W
Luminaire efficacy	41 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

UGR	
UGR axial	12.4
UGR transversal	12.6
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Light distribution simmetry	Symmetrical 2
C0/C180 optics	118°
C90/C270 optics	113°

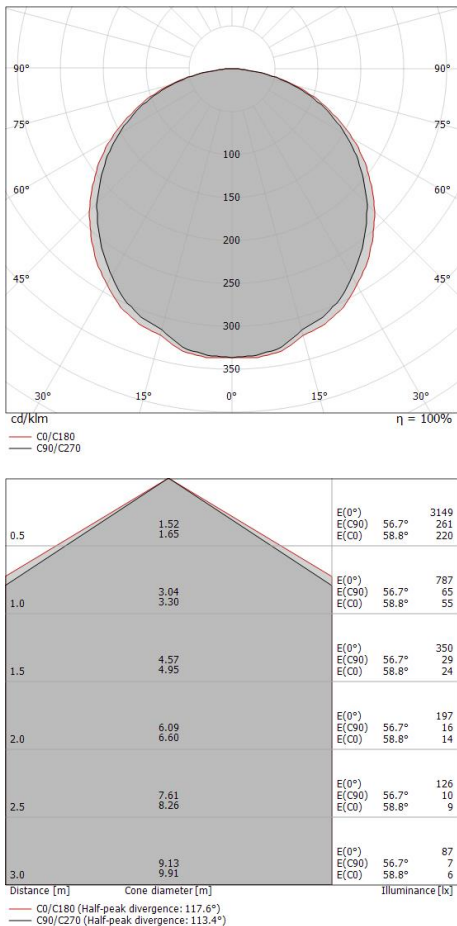



Entourage\_P1 | Pendant Luminaires | Accessories  
7697



Dimmer  
220-240V

Code  
KIT0026