

Demetra floor 3000K white

SPECIFICATIONS

DEM1202



Design By

Naoto Fukasawa

Collection

Design



Specifications

| | |
|------------------------------------|---------------------------------------|
| Delivered lumens | 392lm |
| Light output ratio | 43.56lm/W |
| Power consumption | 9W |
| Led type | 8.5W Array* |
| CCT (Correlated Color Temperature) | 3000K |
| CRI (Color Rendering Index) | >80 |
| Life expectancy | 50000Hrs |
| Control type | DIMMABLE (On Head) / No Motion Sensor |
| Input Voltage | 120-240V |
| Driver | Plug-In |

Colors & Finishes

White


Materials

- Head and arms in painted aluminum
- Lower head diffuser in thermoplastic
- Internal springs and external tension control cables in aluminum
- Floor support stem in aluminum
- Floor base in weighted steel with painted aluminum cover

Features & Accessories

- Fully adjustable arms and head
- Tilttable and rotatable diffuser
- Interchangeable plug options accommodate most electrical outlets for global versatility

Dimensions

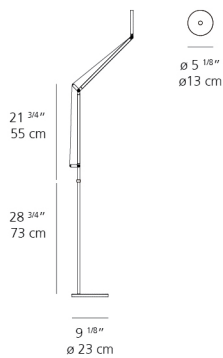

Packaging

3 Boxes

1 x 42" x 14" x 2-5/8" / 5.51 lbs - 106.5 cm x 35.5 cm x 6.5 cm / 2.5 kg

1 x 11-15/16" x 11-15/16" x 3-13/16" / 9.17 lbs - 30.1 cm x 30.1 cm x 9.5 cm / 4.16 kg


1 x 41-13/16" x 1-11/16" x 1-11/16" / 1.54 lbs - 106 cm x 4 cm x 4 cm / .7 kg

Light distribution

Direct

Luminaire weight

9.81 lbs / 4.45 kg



Warranty

5 year limited warranty

Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane