

546  
LED-UL





Project name:  
Date: Specifier:  
Line: Cylindrical  
Family: Ceiling  
Description: Cylindrical Accord Ceiling Mounted 546

Material: Natural Wood Veneer MDF and Acrylic  
Weight:

Integrated LED Module 1 unit Driver housed in the junction box  
Dimmable, 0-10V & TRIAC/ELV

Color Temperature: 2700K, 3000K, 3500K or 4000K  
CRI: 90  
Luminous Flux: 5000lm  
Delivered Lumens: 2500lm  
Total Power: 60W

Input Voltage: 110V - 277V  
Input Frequency: 60 Hz  
Isolation: Class II

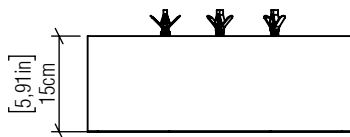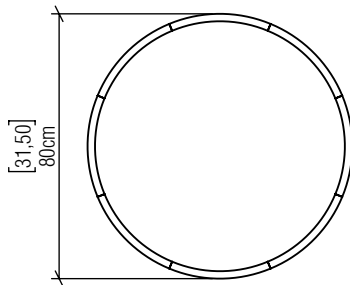

FINISHING OPTION:

|  |                        |   |                   |
|--|------------------------|---|-------------------|
|  | 02<br>MATTE BLACK      |  | 27<br>GOLD        |
|  | 06<br>IMBUIA           |  | 29<br>TEAL        |
|  | 07<br>WHITE            |  | 30<br>OLIVE GREEN |
|  | 09<br>LOURO FREIJÓ     |  | 31<br>FERRARI RED |
|  | 12<br>TEAK             |  | 32<br>COPPER      |
|  | 15<br>CAPPUCCINO       |  | 33<br>BRONZE      |
|  | 18<br>AMERICAN WALNUT  |  | 34<br>MAPLE       |
|  | 22<br>GLOSSY BLACK     |  | 38<br>PALE GOLD   |
|  | 25<br>IREDESCENT WHITE |  | 39<br>LEAD GREY   |
|  | 26<br>LIGHT PINK       |  | 40<br>SATIN BLUE  |