

Exhibiting a modern, Zen-like design approach, the Syntra outdoor bollard light blends seamlessly into contemporary architecture and landscapes. The symmetric down lighting provides abundant outdoor illumination and the clean, angular aesthetic maintains an understated elegance. Also available as a Path Light for a coordinated look.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

### SPECIFICATIONS

DELIVERED LUMENS	578
WATTS	28.9
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	29.2 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.  
 \*\*Bollard base not suitable for branch circuit through wiring.



SYNTRA BOLLARD  
shown in bronze




SYNTRA BOLLARD  
shown in charcoal

### ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
7000BSYN	830 80 CRI, 3000K 840 80 CRI, 4000K	42 42"	C FLAT CLEAR	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL* LF IN-LINE FUSE* PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE*

\*FOR USE ONLY IN 120V-277V VERSION.

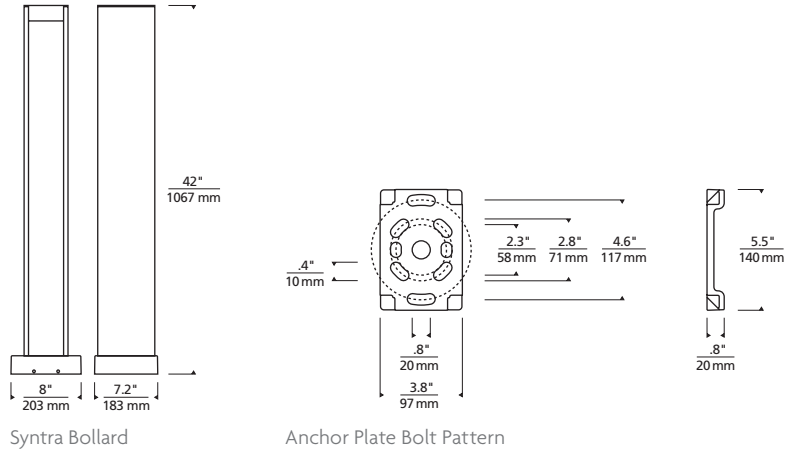


## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### SYNTRA BOLLARD

Total Lumen Output: 578  
 Total Power: 28.9  
 Luminaire Efficacy: 19.9  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: BO-UI-G0

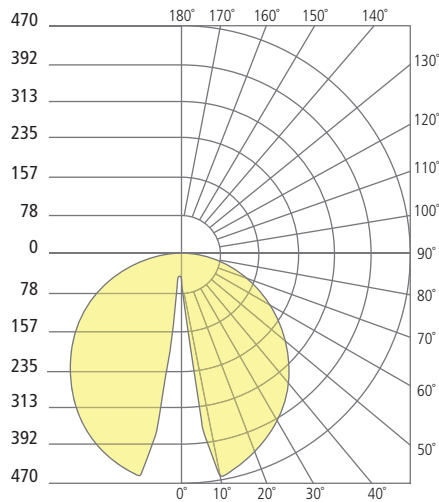

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.

VISUAL COMFORT & Co.

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400