

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Volo

Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-22744 44"	3000K 90	24W	1299	1034	AL Brushed Aluminum BK Black

Example: **PD-22744-AL**

- For 277V special order, add an "F" before the finish: PD-22754F-AL

DESCRIPTION

Wishful lighting. Ultra thin pendant for the discerning minimalist.

FEATURES

- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- 0-10V dimming not available for PD-22775
- 5 Year warranty


SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	54000 Hours
Standards:	ETL, cETL, Title 24: 2019, Energy Star 2.0 Damp Location Listed
Construction:	Aluminum hardware with polycarbonate diffuser

FINISHES



LINE DRAWING

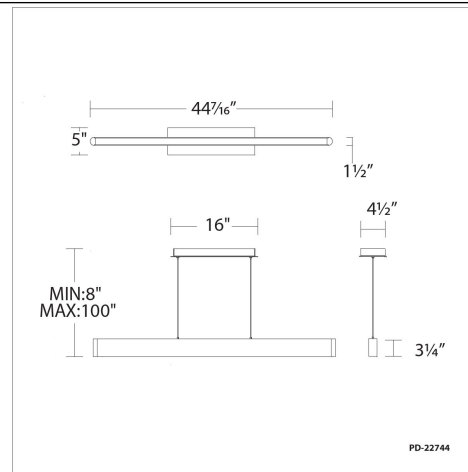

WAC LIGHTING

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Volo

Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-22754 54"	3000K 90	30W	2150	1740	AL Brushed Aluminum BK Black

Example: **PD-22754-AL**

- For 277V special order, add an "F" before the finish: PD-22754F-AL

DESCRIPTION

Wishful lighting. Ultra thin pendant for the discerning minimalist.

FEATURES

- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- 0-10V dimming not available for PD-22775
- 5 Year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	54000 Hours
Standards:	ETL, cETL, Title 24: 2019, Energy Star 2.0 Damp Location Listed
Construction:	Aluminum hardware with polycarbonate diffuser



FINISHES



LINE DRAWING

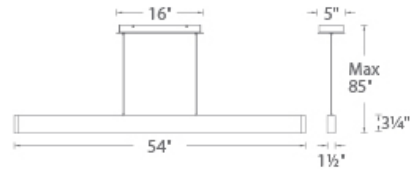

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Volo

Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-22775 75"	3000K 90	44W	2671	1888	AL Brushed Aluminum BK Black

Example: **PD-22775-AL**

- For 277V special order, add an "F" before the finish: PD-22754F-AL

DESCRIPTION

Wishful lighting. Ultra thin pendant for the discerning minimalist.

FEATURES

- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- 0-10V dimming not available for PD-22775
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	54000 Hours
Standards:	ETL, cETL, Title 24: 2019, Energy Star 2.0 Damp Location Listed
Construction:	Aluminum hardware with polycarbonate diffuser



FINISHES



Black Brushed Aluminum

LINE DRAWING

