

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Tube Pendant Downlight Ceiling Mount 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-W2605 5"	3000K 90	16W	800	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: **PD-W2605-AL**

### DESCRIPTION

Precision engineered using advanced proprietary LED technology with a built-in reflector. An appealing cylindrical profile with powerful LED lighting is perfect for accent down lighting applications. Five architectural metallic finishes offered.

### FEATURES


- Hang-straight swivel
- Three 12" and one 6" down rods included
- Title 24 may not be available for all finishes, check for availability
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS

<b>Construction:</b>	Die-cast Aluminum
<b>Power:</b>	16W
<b>Input:</b>	120 VAC, 120-277 VAC, 50/60Hz
<b>Dimming:</b>	ELV: 100-10%, 0-10V: 100-5%
<b>Light Source:</b>	Integrated LED
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Mounts directly to junction box
<b>Finish:</b>	Electrostatically Powder Coated Brushed Aluminum, Electrostatically Powder Coated Black, Electrostatically Powder Coated Bronze, Electrostatically Powder Coated Graphite, Electrostatically Powder Coated White
<b>Operating Temp:</b>	-40°F to 122°F (-40°C to 50°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8-2016 Compliant, Title 24:



### FINISHES

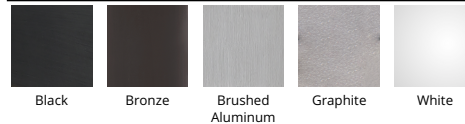

### LINE DRAWING

