



Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Rondelle

### Bathroom Sconce 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-42514 14"	3000K 90	16W	518	490	AB Aged Brass PN Polished Nickel

Example: **WS-42514-AB**

- For 277V special order, add an "F" before the finish: WS-42524F-PN

#### DESCRIPTION

Inspired by collectible antique pole-top insulators, now illuminated as nostalgic lighting fixtures.

#### FEATURES


- Solid cast glass shades
- Driver located in standard 4" junction box
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 Year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	60000 Hours
Standards:	ETL, cETL
	Damp Location Listed
Construction:	Aluminum hardware with glass diffuser, Steel hardware with glass diffuser




#### FINISHES



Aged Brass

Polished Nickel

#### LINE DRAWING

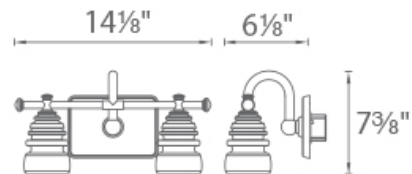

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Rondelle

### Bathroom Sconce 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-42524 24"	3000K 90	24.5W	865	805	AB Aged Brass PN Polished Nickel

Example: **WS-42524-AB**

- For 277V special order, add an "F" before the finish: WS-42524F-PN

#### DESCRIPTION

Inspired by collectible antique pole-top insulators, now illuminated as nostalgic lighting fixtures.

#### FEATURES


- Solid cast glass shades
- Driver located in standard 4" junction box
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 Year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	60000 Hours
Standards:	ETL, cETL
	Damp Location Listed
Construction:	Aluminum hardware with glass diffuser, Steel hardware with glass diffuser



#### FINISHES



Aged Brass Polished Nickel

#### LINE DRAWING

