

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Tube

Single & Double Wall Mount 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
WS-W2604 Double	3000K 90	30W	1750	AL Brushed Aluminum
WS-W2605 Single	3000K 90	16W	800	BK Black BZ Bronze GH Graphite WT White

Example: **WS-W2604-AL**

DESCRIPTION

A simple sconce with endless possibilities. This cylindrical wall luminaire delivers powerful lumen output, either upwards or downwards, or a combination of both, depending on the configuration and application. Built to last with die-cast aluminum construction and designed with no visible hardware, this low profile highly versatile Tube is perfect for your exterior and interior lighting needs. Five handsome architectural finishes will complement nearly any dcor.

FEATURES


- Title 24 may not be available for all finishes, check for availability
- 2605 Single, 2604 Double
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum
Power:	30W, 16W
Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-15%, 0-10V: 100-10%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box, Can be mounted on wall in all orientations
Finish:	Electrostatically Powder Coated White, Electrostatically Powder Coated Black, Electrostatically Powder Coated Bronze, Electrostatically Powder Coated Brushed Aluminum, Electrostatically Powder Coated Graphite
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8-2016 Compliant, Title 24:



FINISHES

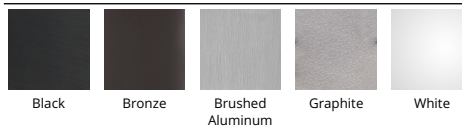

LINE DRAWING

