CIRCA TABLE

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Table

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Table (Graphite):	CIRC TBL GPT
Circa Table (White):	CIRC TBL WHT

LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

FEATURES

360° shade rotation 45° shade tilt in two directions USB charging port Ships flat-packed

SPECIFICATIONS

Voltage: 120 or 220V 50-60Hz Power Consumption: 8.7W Color temperature: 2700K Luminosity: 800 Lumens

Luminaire efficacy: 92 Lumens/Watt Color Rendition Index: 90 CRI

ADA compliant Title 20 compliant 50K hour lifespan Cord length: 8' (244cm)

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Table : 8.45LBS 15" X 14" X 4"

3.8KGS 38cm X 36cm X 10cm

NOTES

Custom requests can be considered on volume orders



FINISHES








DIMENSIONS

CIRCA TABLE





CIRCA GROMMET

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Table (Grommet)

LIGHT SOURCE

LED Flat Panel

PRODUCT CODES

Circa Table Grommet Graphite: CIRC-GROM-GPT
Circa Table Grommet White: CIRC-GROM-WHT

LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

FEATURES

360° shade rotation 45° shade tilt in two directions USB charging port Ships flat-packed

SPECIFICATIONS

Voltage: 120 or 220V 50-60Hz Power Consumption: 8.7W Color temperature: 2700K Luminosity: 800 Lumens

Luminaire efficacy: 92 Lumens/Watt Color Rendition Index: 90 CRI

ADA compliant Title 20 compliant 50K hour lifespan Cord length: 8' (244cm)

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Grommet: 8.45 LBS 14" X 15" X 4"

3.8 KGS 38cm X 36cm X 10cm

NOTES


Custom requests can be considered on volume orders



FINISHES





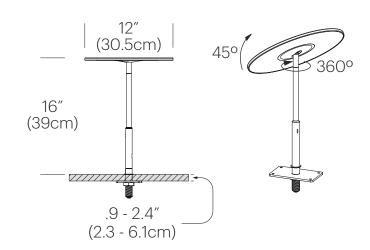



CIRCA FLOOR

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Floor

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Floor (Graphite):	CIRC FLR GPT
Circa Floor (White):	CIRC FLR WHT
Circa Floor+Ped. (Graphite)	: CIRC FLR PED GPT
Circa Floor+Ped. (White):	CIRC FLR PED WHT

LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

FEATURES

360° shade rotation 45° shade tilt in two directions USB charging port Ships flat-packed

SPECIFICATIONS

Voltage: 120V or 240V 50-60Hz Power Consumption: 11.5W Color temperature: 2700K Luminosity: 800 Lumens

Luminaire efficacy: 70 Lumens/Watt Color Rendition Index: 90 CRI

ADA compliant
Title 20 compliant
50K hour lifespan
Cable length: 8' (244cm)
Global multipling adapter:

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Floor:	21.9LBS	29" X 18" X 3.5"
	9.9KGS	74cm X 46cm X 9cm
Circa Floor Pedestal:	2.85LBS	11" X 11" X 3"
	1.3KGS	28cm X 28cm X 8cm

NOTES

Custom requests can be considered on volume orders




FINISHES





(35.5cm)

DIMENSIONS

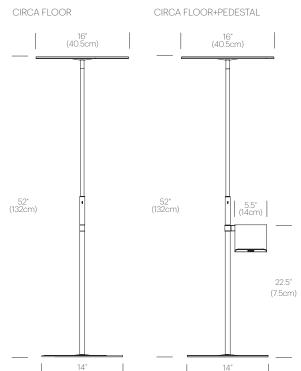

(35.5cm)



CIRCA WALL

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Wall

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Wall 12 Graphite:	CIRC WAL 12 GPT
Circa Wall 12 White:	CIRC WAL 12 WHT
Circa Wall 16 Graphite:	CIRC WAL 16 GPT
Circa Wall 16 White:	CIRC WAL 16 WHT

LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

FEATURES

360° shade rotation 45° shade tilt in two directions USB charging port Ships flat-packed

SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz

Power Consumption: 8.7W (12) 10.8W (16)

Color temperature: 2700K

Luminosity: 800 Lumens (12) 800 Lumens (16) Luminaire efficacy: 92 Lumens/Watt (12)74 L/W (16)

Color Rendition Index: 90 CRI

ADA compliant Title 20 compliant 50K hour lifespan Cable length: 8' (244cm)

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Wall 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Wall 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm


NOTES

Custom requests can be considered on volume orders



FINISHES



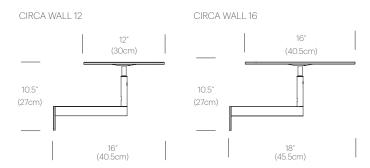



CIRCA FLUSH

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Wall/Ceiling

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Flush Direct 12 Graphite:	Special order only
Circa Flush Direct 12 White:	Special order only
Circa Flush Direct 16 Graphite:	Special order only
Circa Flush Direct 16 White:	CIRC FSH 16 WHT
Circa Flush Indirect 12 Graphite:	Special order only
Circa Flush Indirect 12 White:	Special order only
Circa Flush Indirect 16 Graphite:	Special order only
Circa Flush Indirect 16 White:	Special order only
Circa Flush Indirect 12 White: Circa Flush Indirect 16 Graphite:	Special order only Special order only

LIGHT CONTROL

Hard Wired (Triac transformer) ELV dimmer recommended

FEATURES

Ships flat-packed

SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz Power Consumption: 10.5W Color temperature: 2700K Luminosity: 800 Lumens

Luminaire efficacy: 76 Lumens/Watt

Color Rendition Index: 90 CRI

Title 20 compliant ADA compliant 50K hour lifespan 1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Flush 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Flush 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES

Custom requests can be considered on volume orders




INDIRECT SPECIAL ORDER ONLY

FINISHES





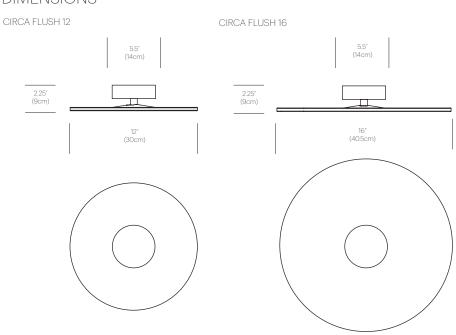



CIRCA PENDANT

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Pendant

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT

LIGHT CONTROL

Hard wired (Triac transformer) full range dim ELV dimmer recommended

FEATURES

360° shade rotation 45° shade tilt in two directions Ships flat-packed

SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz Power Consumption: 10.5W Color temperature: 2700K Luminosity: 800 Lumens

Luminaire efficacy: 76 Lumens/Watt Color Rendition Index: 90 CRI

Title 20 compliant

50K hour lifespan

Cable length: 10' (305cm) (Field Cuttable)

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS


Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES

Custom requests can be considered on volume orders

FINISHES







CIRCA CHANDELIER

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa Chandelier is available in 3, 5, and 7 lamp configurations to fit a wide range of commercial and residential environments.

FIXTURE TYPE

Pendant

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT
17" Chandelier Canopy:	CHND CAN 17
26" Chandelier Canopy:	CHND CAN 26

LIGHT CONTROL

Hard wired (Triac transformer) full range dim ELV dimmer recommended

FFATURES

360° shade rotation 45° shade tilt in two directions Ships flat-packed

SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz Power Consumption: 10.5W per lamp

Color temperature: 2700K

Luminosity: 800 Lumens per lamp Luminaire efficacy: 76 Lumens/Watt Color Rendition Index: 90 CRI

Title 20 compliant 50K hour lifespan

Cable length: 10' (305cm) (Field Cuttable)

1 year warranty

CERTIFICATIONS





PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm
Chandelier canopy 17":	15LBS	22" X 22" X 6"
	6.8KGS	56cm X 56cm X 15cm
Chandelier canopy 26":	30LBS	32" X 32" X 6"
	13.6KGS	81cm X 81cm X 15cm

NOTES

Custom requests can be considered on volume orders







FINISHES






DIMENSIONS







CIRCA CHANDELIER 3 (16")

2" <u></u>

26" (66cm (43cm)

CIRCA CHANDELIER 5 (16")

(5cm) =

40" (101.6cm) (66cm)


35.5"


(89cm)

2* (66cm) (5cm) (5cm) (35.5* (20cm) (20cm)

CHANDELIER CANOPY 17"

(79cm)





CHANDELIER CANOPY 26"