




Plura 36 Pendant, walnut

The Plura is a simple, straight forward fixture that is excellently executed. With the Plura it was about resolving the seams and edges and their relationships to one another. The result is a scalable fixture that has a sharp, sophisticated feel.

Nick Sheridan
Designer

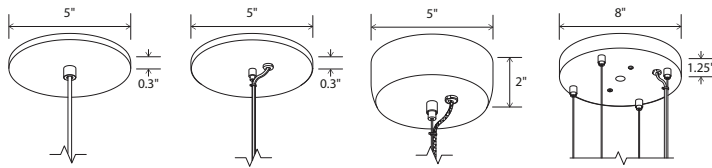

Plura 18 and Plura 24 low-profile round canopy with white SVT


Plura 30 GU-24 Base Sockets low-profile round canopy clear SPT with steel cable

Plura 30 Integrated LED extended round canopy clear SPT with steel cable


Plura 36 8" round canopy clear SPT with four 1/16" Ø steel cables



white washed oak (CM-095)



walnut (CM-001)



dark stained walnut (CM-002)



frosted polymer (CM-051)



matte black (CM-085) with matte white interior



brushed aluminum (CM-012)



brushed rose gold (CM-046)




brushed brass (CM-047)



distressed brass (CM-096)

Plura pendant

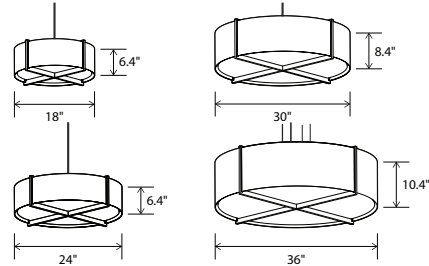

Dimensions:
 Plura 18: 18" Ø, 6.4"
 Plura 24: 24" Ø, 6.4"
 Plura 30: 30" Ø, 8.4"
 Plura 36: 36" Ø, 10.4"
 Materials: solid wood, metal, polymer
 Product weight:
 Plura 18: 5 lb
 Plura 24: 6 lb
 Plura 30: 9 lb
 Plura 36: 13 lb

MATERIAL & FINISH OPTIONS

Plura pendant part # 06-230-	
Ø:	
18" Ø	18
24" Ø	24
30" Ø	30
36" Ø	36
Wood Body	
walnut (CM-001)	W
dark stained walnut (CM-002)	D
white washed oak (CM-095)	O
Shade Material	
frosted polymer (CM-051)	F
matte black (CM-085)	B
with matte white interior	
brushed aluminum (CM-012)	A
brushed rose gold (CM-046)	G
brushed brass (CM-047)	R
distressed brass (CM-096)	D
gloss white (CM-054)	W
Lamping*	
2700 K LED	27
3500 K LED	35
GU-24 base sockets	GU
Driver (LED version only)	
AC Input Voltage Range:	
120-277 V	
120 V input: TRIAC, ELV & 0-10 V dimmable	P1
240 & 277 V input: only 0-10 V dimmable	

Integrated LED Specifications

Light output:
 Plura 18 & 24: 1690 Lumens (source)
 Plura 30 & 36: 2815 Lumens (source)
 Light color*: 2700 K or 3500 K
 Color accuracy: 90+ CRI
 Power usage:
 Plura 18 & 24: 19.5 W
 Plura 30 & 36: 32.5 W
 Dimmable (see driver below)
 Plura 18 & 24 driver location: must be housed in J-box
 Driver dimensions: 3.3" x 1.6" x 1", included
 Plura 30 & 36 driver location: housed in canopy


GU-24 Base Specifications

Light source:
 Plura 18 & 24: 2x GU-24 base socket
 Plura 30 & 36: 4x GU-24 base socket
 Lamping:
 Plura 18 & 24: 2x GU-24 base, 18 W max each
 Plura 30 & 36: 4x GU-24 base, 18 W max each
 Bulbs not included
 Input voltage: 300 V AC max

See below for canopy information
 96" drop length, field adjustable
 Suitable for a sloped ceiling
 Wood grain will vary
 Specifications subject to change



gloss white (CM-054)

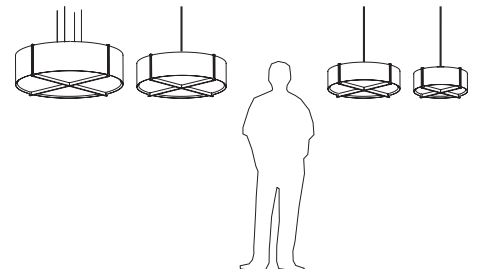

▲WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov