



THINK OUTSIDE THE STADIUM  
**HOMETEAM**  
**SEATS**

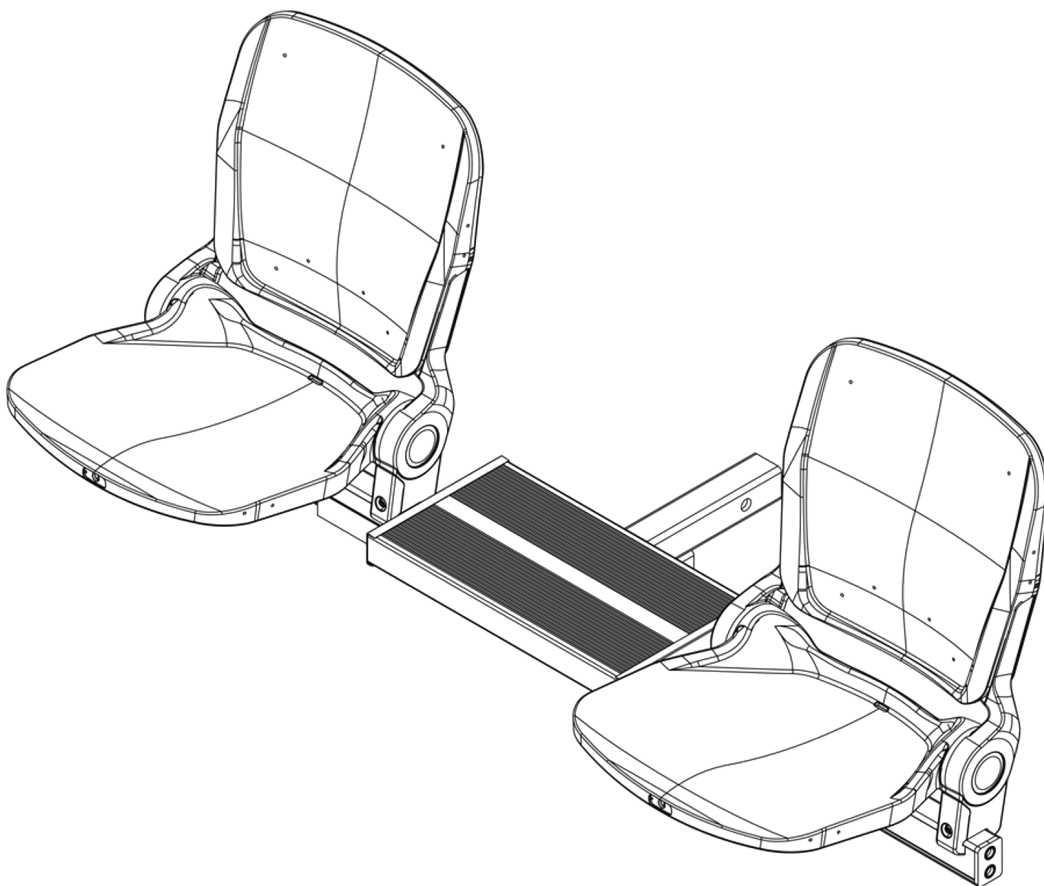

## **2 Seater With Table**

Assembly Instructions

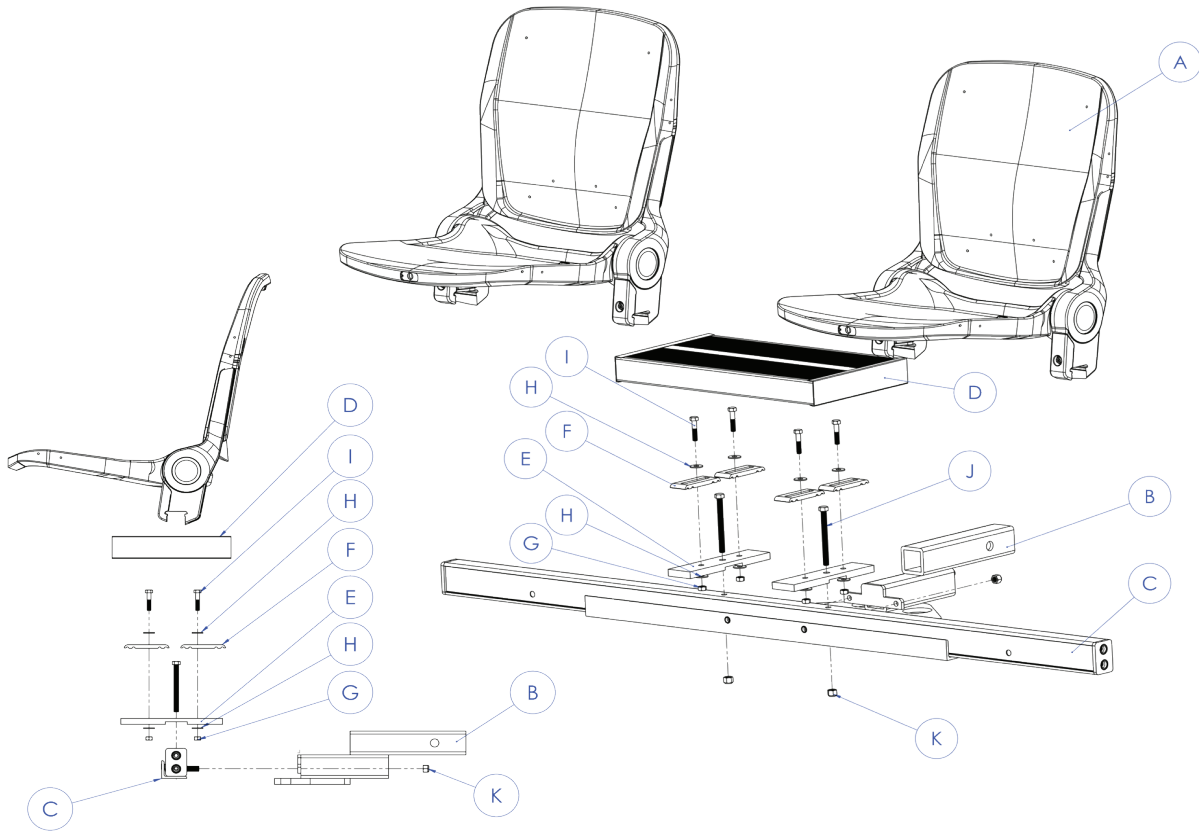


PARTS	DESCRIPTION	QTY.
A	OVATION SEAT	2
B	HITCH MOUNT	1
C	SEAT SUPPORT BAR	1
D	TABLE	1
E	TABLE BRACKET	2
F	TABLE CLIPS	4
G	5/16" NUT	4
H	5/16" WASHER	8
I	5/16-18 X 1.5" BOLT	4
J	3/8-16 X 4" BOLTS	2
K	3/8" NYLOCK NUT	4

All Hitch N' Sit seats have locks on them with key provided, to prevent unauthorized use while vehicle is in motion. The Stabilizer accessory is recommended with Hitch N' Sit 3-Seaters and 4-Seaters to prevent movement and minimize any wobble while attached to vehicle.


All Hitch N' Sit seating systems are provided with a keyed hitch pin to securely lock into the hitch receiver. Our Hitch Adapter is made exclusively to work with our seats and fits in any 2" hitch receiver. The Beam of the Hitch N' Sit has a designated spot in the center to move your license plate to, ensuring it is in view while on the road. This applies to all Hitch N' Sit seating systems except for the 2-Seater with Table, which does not cover your license plate.




HITCH LOCK AND KEY

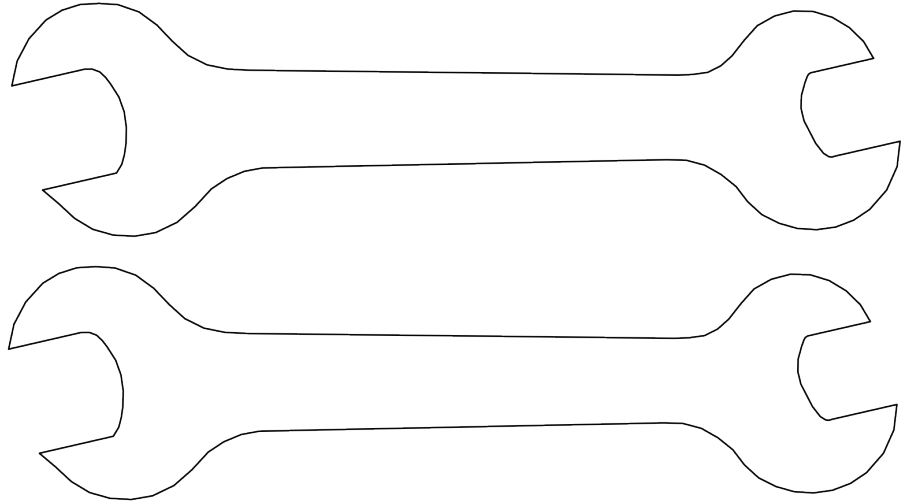

(2X) 9/16" - 1/2" COMBO WRENCH

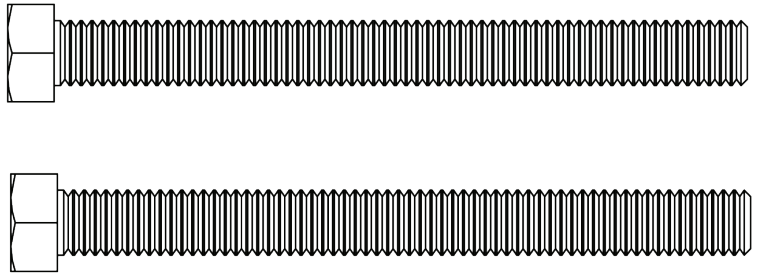


(2X) 3/8"-16 X4" HEX BOLT

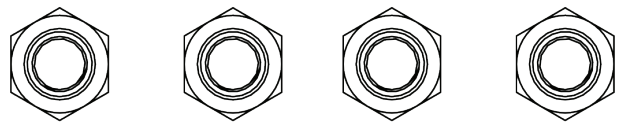


(4X) 3/8"-16 NYLOCK NUT





T-40 WRENCH

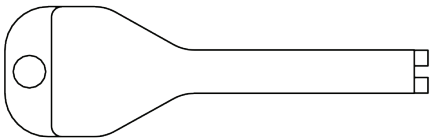


SEAT KEY

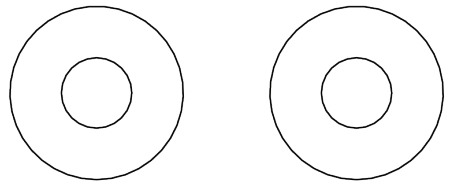




(2X) 3/8" WASHER

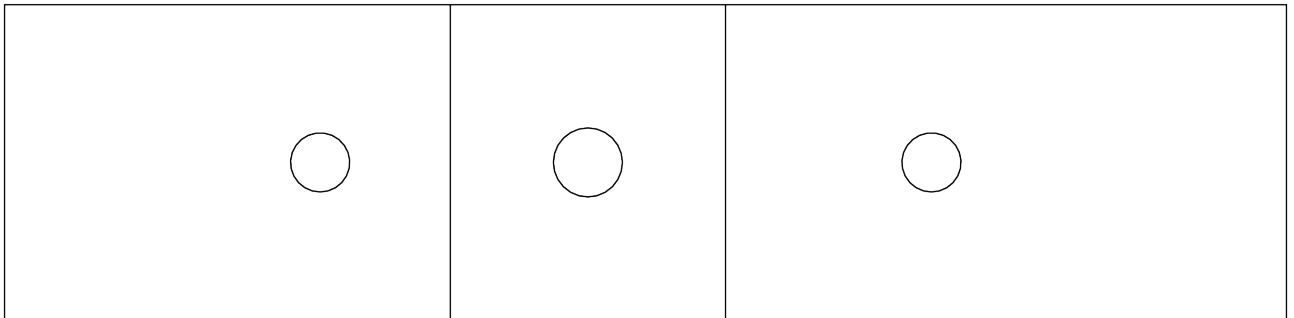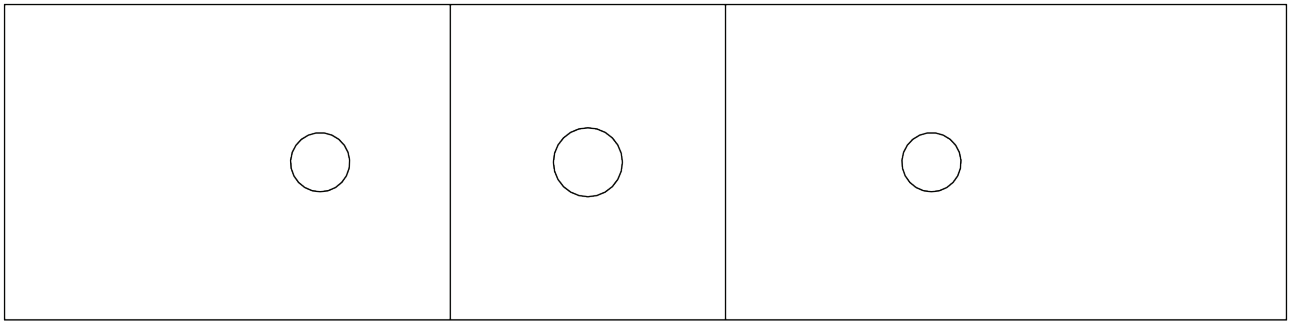




(2X) TABLE BRACKET

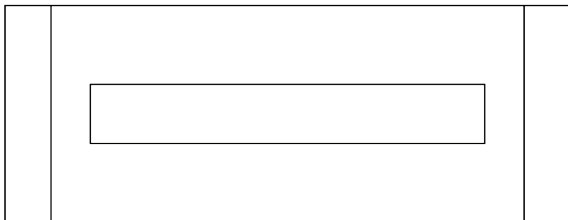

(4X) TABLE CLIPS

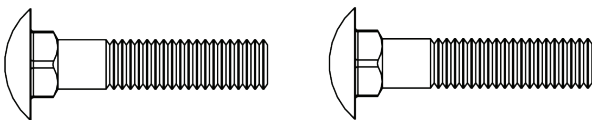

(4X) 5/16" LOCK WASHER




(4X) 5/16"-18 NUT

(4X) 5/16-18" X1.5"

# How To Assemble Your 2 Seater With Table


## Attaching Your Hitch Adapter To The Beam

1. Position the Hitch Adapter (Part B) to accept the bolts that will come through the two holes in the center of the Beam (Part C)

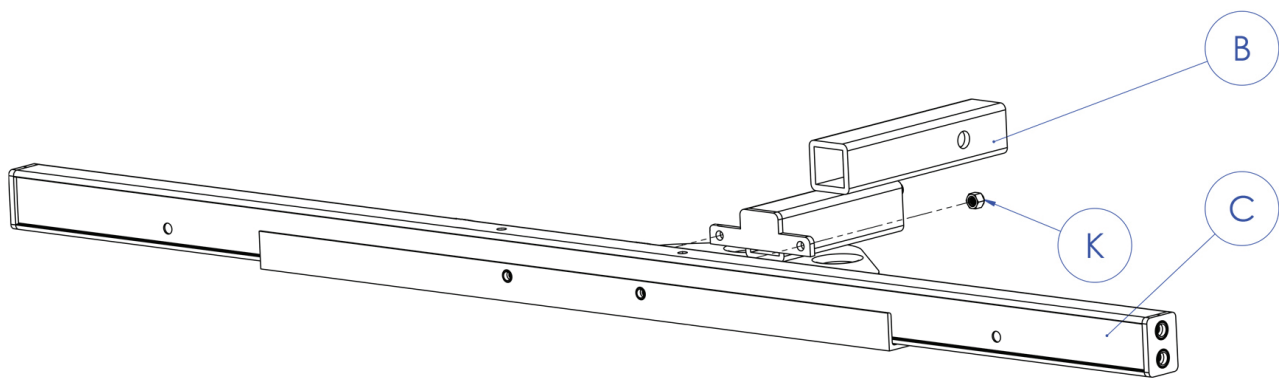

2. Place a 3/8" WASHER on bolt and slide through beam (Part C) and hitch adapter (Part B)



3. Fasten Nylock Nut (Part K) onto each bolt and securely tighten. The Nylock Nut should be fastened as shown in the diagram.

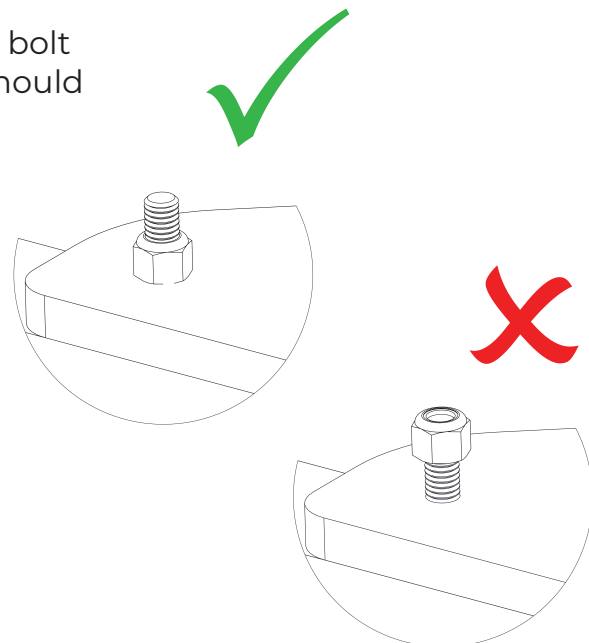

## Attaching Your Hitch Adapter To The Beam

1. There are arrows on both the table and the table brackets, make sure that all of the arrows are always facing toward the front

2. To assemble the table, take two of the carriage bolts and put them through two of the clips (Part F) and then through the table bracket (Part E). Loosely tighten the 5/16" nut (Part G) and the 5/16" washer (Part H). Repeat this for the second table bracket (Part E)

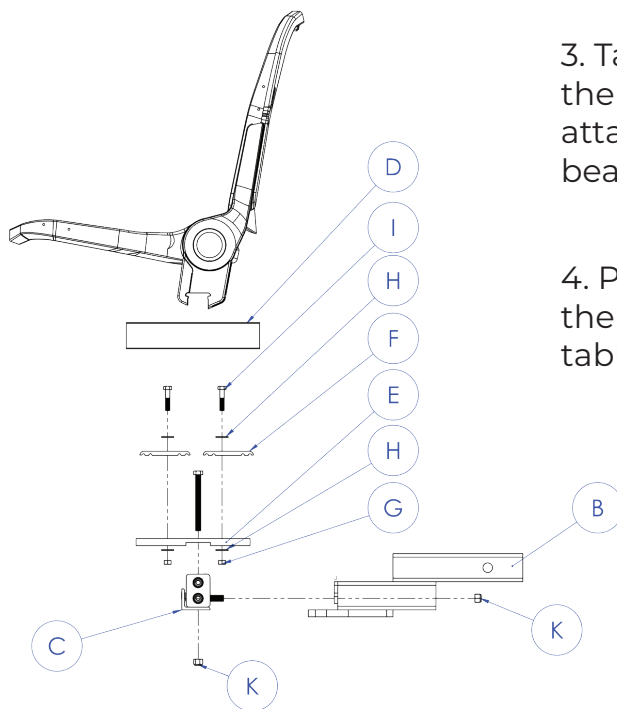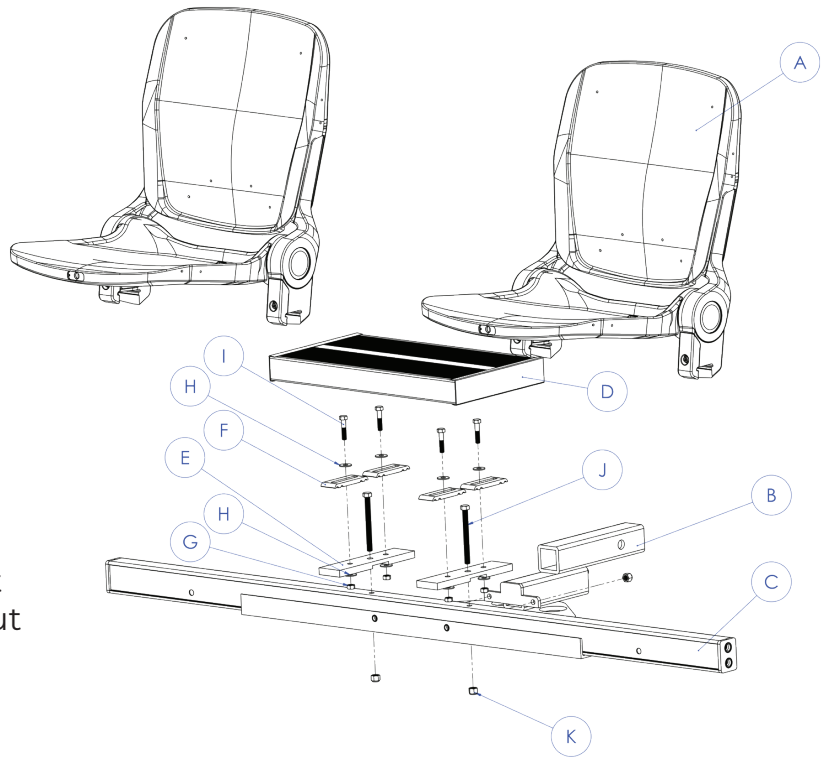

3. Take the 4" bolt and put that through the top of the table bracket (Part E) for attaching the entire table assembly to the beam (Part C)

4. Position the clips (Part F) at a 90° angle to the table bracket (Part E) and then place the table on top

5. Take the loose clips (Part F) and position them so that they're grabbing the lip on the under side of the table

6. Tighten the clips (Part F) so they're snug, but do not tighten all the way down


7. Take the hitch adapter (Part B) and the beam (Part A), position them to accept the bolts (Part J) coming through the center of the beam

8. Take the Nylock nuts (Part K) and put them on with the 9/16th socket. Tighten until it's secure but do not over-tighten


9. Now that the hitch adapter (Part B) is attached to the beam (Part C), grab the assembled table (Part D) and make sure the arrow labels are facing front. The hitch adapter will be toward the back, which will go into the hitch receiver on the truck

10. Take table with bolts (Part J) hanging down through the beam (Part C) and the hitch adapter (Part B), tighten down with 3/8" Nylock nut (Part K)

11. Tighten down all hardware

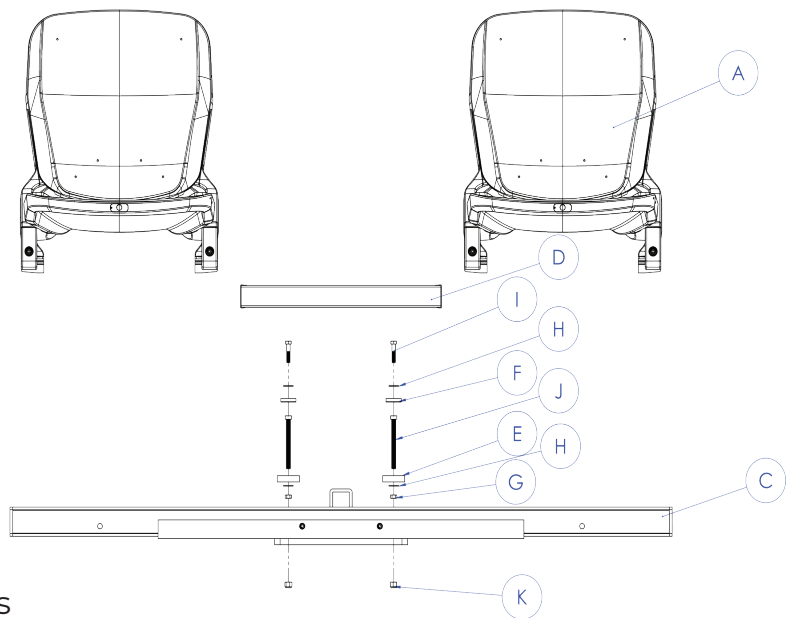

## Attaching Your Seats To The Beam

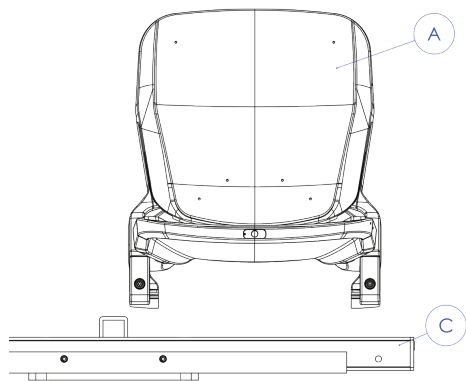

1. Line your seat (Part A) up starting at the center of the beam (Part C)

2. Lock bottom of seat (Part A) onto the beam (Part C) by making sure the ribbed edge is in the groove of the chair tab. Tighten with the T40 tool

3. Repeat Step 2 for each seat and be sure to align all seats (Part A) on the beam (Part C) evenly