



HYDROTECH.[®]

PRO SERIES

OPERATION INSTRUCTIONS:


Ensure rubber washer is securely in place inside the hose end connection (coupler) before attaching the hose to the faucet (spigot). (Extra rubber washer is included)

Make sure the coupler and the shut off valve end are both securely tightened to the hose.

Connect hose coupler to the water spigot.

Close valve at other end of hose.

Turn on the water and fill the hose to expand completely. Remember to reopen valve before use.

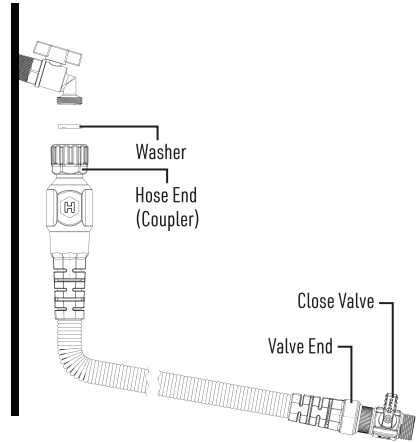

Water pressure must be 60 PSI to get optimal performance and expansion.

IMPORTANT INFORMATION:

Do not leave hose under full pressure when not in use.

In extreme heat, store hose indoors.

Do not leave hose outside in freezing temperatures, store indoors in the winter.

NOTICE: Hose retracts when the water source is turned off. Stand clear of any attached accessories that may be pulled toward the spigot.

QUESTIONS? | CALL or EMAIL

If you have any questions or difficulty using this product, we are here to help!
Our customer service team is available Monday through Friday, 9 am to 5 pm EST



1-844-430-1311



info@HydroTechProducts.com