





Ribbon-Lite

Unitube Gel Free Single Sheath Duct OFC

12F - 144F | Nova - G.657.A1 Single Mode Fiber

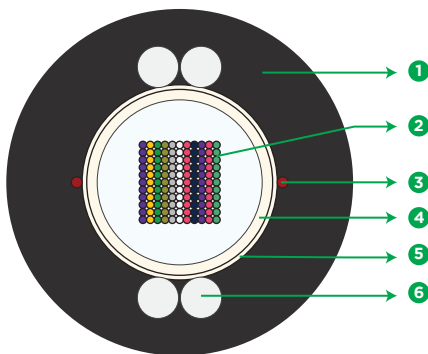

- 1 OUTER JACKET
- 2 RIBBON
- 3 RIPCORD(S)
- 4 GEL FREE LOOSE TUBE
- 5 WATER BLOCKING TAPE
- 6 STRENGTH MEMBER



- 1 RIBBON SAFEGUARDING
- 2 FIBER RIBBON AND WSM
- 3 WATER SWELLABLE MATERIAL
- 4 RIBBON SAFEGUARDING

* Typical Construction Diagram - Not to Scale

Features & Benefits

- Ribbon cable can be prepared and spliced much more rapidly
- Precise Fiber and ribbon geometries result in excellent mass fusion splicing yields
- Fiber ribbons are individually marked for easy identification
- Dry water-blocking technology for gel free core helps in quicker end preparation
- Easily removable rugged thermoplastic jacket
- UV protected, Flexible, light weight, easy to handle & instal

Product Details

STL RIBBON-LITE Unitube Single Jacket Cable combines robust performance for high-count mass fusion splicing. The optical fibers are arranged into ribbon units by placing the fibers in a flat array of color-coded Fibers bonded together by a UV-curable acrylate matrix. RIBBON-LITE comes with gel free technology, the buffer tubes contain water swellable yarns and is surrounded with water-swellable tape to prevent water ingress in the cable. Sheathed by thermoplastic jacket with dielectric (FRP) as embedded strength members diagonally opposite making the cable robust and installation friendly.

Cable Performance Standards

Cable complies to the following standards IEC 60793, IEC 60794, ANSI/ICEA S-87-640, Telcordia GR-20, ITU-T, RoHS, REACH, EIA/TIA-598C.

Printing Details

Printing : STL SM NOVA “FIBER COUNT” RIBBON DUCT OFC LASER SYMBOL TELEPHONE SYMBOL “YEAR OF MANUFACTURE” “LENGTH CODE” “FEET MARKING”

Note : The accuracy of marking shall be + 0.5%. Occasional loss of printing & remarking shall be as per Bell core GR 20 and this supersedes the earlier markings.

Specifications

Physical Characteristics	
Fiber Count	12-144
Fiber Type	STL NOVA (ITU-T G.657A1)
Maximum Cabled Attenuation (dB/km)	1310nm : 0.4 & 1550nm : 0.3
PMD LDV (ps/sqrt.km)	</= 0.1
Fibers per Ribbon	12
Tube Material	White or Natural, Polypropylene (PP)
Water Blocking	Yarns and water swellable tape
No. of Ripcords Below Tape	2
Embedded Strength Member	Pair of FRPs (Fiber Reinforced Plastic) 180° apart
Outer Sheath Material	UV Proof Black Polyethylene

Fiber Color Sequence (AS per EIA/TIA 598C)

Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Rose	Aqua
------	--------	-------	-------	-------	-------	-----	-------	--------	--------	------	------

Cable Characteristics

Product Code	Ribbon per Tube	Tube Color Sequence	Cable Diameter mm (inch)(± 5%)	Cable Weight Kg/Km (lbs./ft.) (± 10%)
Q10012SN01FAP10000	1	BSR, 1 RIBBON 1, BSR	11.8 (0.464)	136 (0.091)
Q10024SN01FAP10000	2	BSR, 1 RIBBON 1, 2 RIBBON 2, BSR	11.8 (0.464)	138 (0.092)
Q10036SN01FAP10000	3	BSR, 1 RIBBON 1, 2 RIBBON 2, 3 RIBBON 3, BSR	11.8 (0.464)	140 (0.094)
Q10048SN01FAP10000	4	BSR, 1 RIBBON 1, 2 RIBBON 2, 3 RIBBON 3, 4 RIBBON 4, BSR	11.8 (0.464)	142 (0.095)
Q10072SN01FAP10000	6	BSR, 1 RIBBON 1, 2 RIBBON 2, 3 RIBBON 3, 4 RIBBON 4, 5 RIBBON 5, 6 RIBBON 6, BSR	12.2 (0.480)	145 (0.097)
Q10096SN01FAP10000	8	BSR, 1 RIBBON 1, 2 RIBBON 2, 3 RIBBON 3, 4 RIBBON 4, 5 RIBBON 5, 6 RIBBON 6, 7 RIBBON 7, 8 RIBBON 8, BSR	12.6 (0.496)	150 (0.100)
Q10144SN01FAP10000	12	BSR, 1 RIBBON 1, 2 RIBBON 2, 3 RIBBON 3, 4 RIBBON 4, 5 RIBBON 5, 6 RIBBON 6, 7 RIBBON 7, 8 RIBBON 8, 9 RIBBON 9, 10 RIBBON 10, 11 RIBBON 11, 12 RIBBON 12, BSR	13.8 (0.543)	162 (0.108)

Note : BSR- Blue Colored Safeguard Ribbon

Specifications

Mechanical & Environmental Characteristics		
Cable Characteristics	Cable Performance	Testing Standard
Tensile Strength (N) (lbf)	Short Term - 2700 (606.9) Long Term - 900 (202.3)	ICEA 640 FOTP-33
Crush Resistance (N/cm) (lbf/in)	220 (125)	ICEA 640 FOTP-41
Impact Strength (Nm)(lbf.in)	5 (44.2)	ICEA 640 FOTP-25
Torsion	±180°	ICEA 640 FOTP-85
Min. Bend Radius (During Installation)	20 D	ICEA 640 FOTP-88
Min. Bend Radius (After Installation)	15 D	ICEA 640 FOTP-88
Water Penetration Test	1m waterhead, 3m samples, 24 h	ICEA 640 FOTP-82
Temperature Performance	Max. change in attenuation shall be ≤ 0.15 dB/km	ICEA 640 FOTP-3
Installation	-30°C to +70°C	
Operation	-40°C to +70°C	
Storage	-40°C to +70°C	

- Note :**
- All tests shall be carried out as per IEC standards. Change in attenuation after and before testing shall be ≤ 0.05 dB/km for Single Mode Fiber.
 - The edge fibers (Blue, Orange, Rose & Aqua) in top & bottom ribbons shall be Stellar.

Packing and Lengths

Drum Type	Length Multiple (in feet)	Tolerance	Short Lengths
Wooden Drums	10000; 13,123; 20,000 $\pm 5\%$ (For all Fiber counts)	-0%, +5%	Max 5%, Customer Approval

For additional information please contact your sales representative.

You can also visit our website at www.stl.tech