





# STL RACKS

600x600, 600x800, 600x1000, 600x1100, 600x1200,  
800x600, 800x800, 800x1000, 800x1100, 800x1200

-  Safety class rating IP20
-  Available in heights from 12U up to 47U
-  Load capacity 1000 kg
-  360° spinnable with castors



## Product features


- Safety class rating IP20
- Available in heights from 12U up to 47U
- Load capacity 1000 kg
- 360° spinnable with castors
- Ventilated roofs make air circulation better and reaching fan modules easier
- Front door: 4mm impact resistant smoked glass with edge frame
- Glass or Solid Metal or 75% perforated door reversible front and rear door
- Rear door: double opening with 180° angle
- Side panels: a key lock and easily detachable
- Swing handle lock fitted to glass front door and solid metal rear door
- Full height front and rear adjustable galvanized steel 19" profiles
- 19" profiles marked with U height position, large cut out in base and roof for cable entry is prepared for fan units (punched out entries)

## Product overview


STL Racks are designed to provide optimal performance with a professional look for a wide range of applications in the telecommunication field. These racks are available in various dimensions. Each rack consists of up to 1.5mm strong steel sheet material which ensures a very good stability and can take a load up to 1000kg.

Each cabinet has a ventilated roof for better air circulation. Its fully adjustable front and rear profile rails and large cable entries of the cabinet, make this product easy to use for installers. These racks are compatible with an extensive range of accessories (plinths, shelves, cable management, etc.) and can enable many communication use cases.

### Technical drawing 600x600

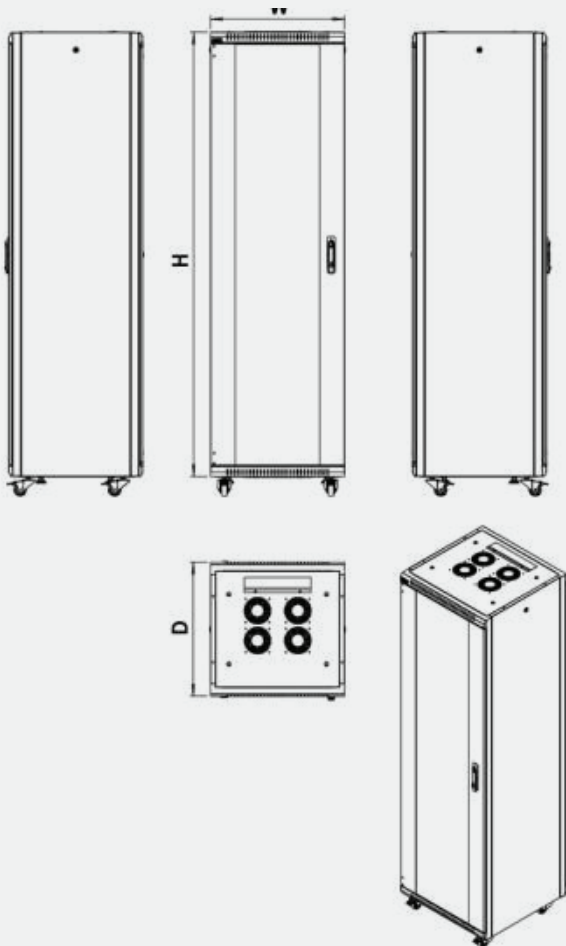

### Technical drawing 800x800

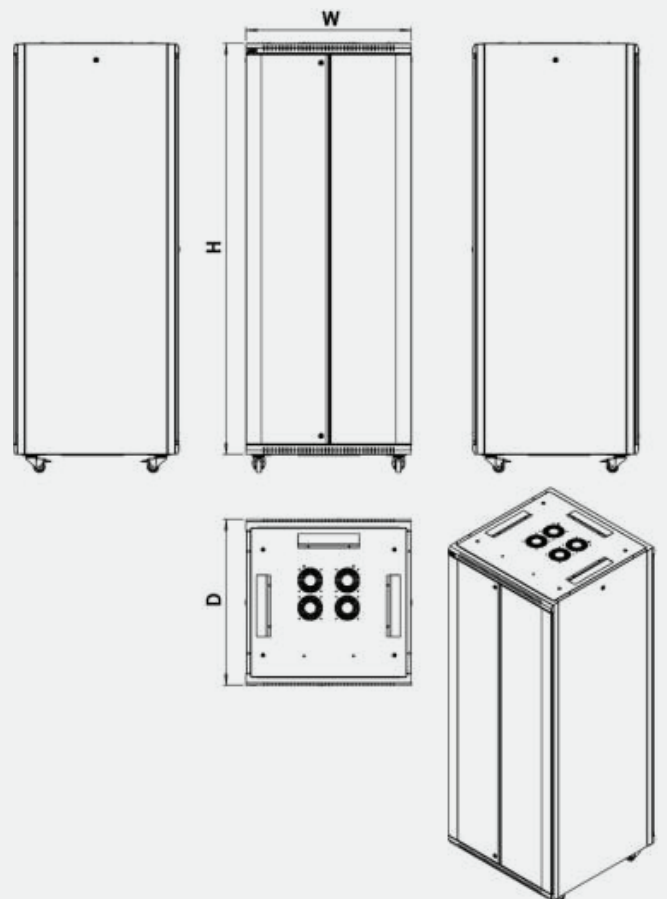

Door options



Front Glass



Front Perforated



Front Metal



Front Metal Divided



Front Perf. Divided



Back Metal



Back Perforated



Back Metal Divided



Back Perforated Divided

Physical Characteristics	Description
Material	Steel Sheet DKP
Width	600, 800mm
Height	Available in heights from 12U up to 47U
Depth	600, 800, 1000, 1200mm
Color Options	RAL9005 Black or RAL7035 Light Grey
Mounting Rail	4 Pcs.
Material Thickness	Mounting profile 2.0mm Angle 1.5mm Other 1.2mm

## Part no. Configurators

SR	06	06	16	BK	01	F
Family	Width	Depth	Height	Color	Front Door	Packing
SR - Rack	06 - 600mm	06 - 600mm	16 - 16U	BK - Black (RAL 9005)	01 - Hinged Glass Single Opening	F - Flat Pack
	08 - 800mm	08 - 800mm	18 - 18U	LG - Light Grey (RAL 7035)	02 - Hinged Flat Perforated Single Opening	A - Assembled
		10 - 1000mm	27 - 27U	WH - White (RAL 7032)	03 - Hinged Flat Perforated Dual Opening	
		12 - 1200mm	42 - 42U			
			45 - 45U			
			47 - 47U			

08/082023

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, Sterlite Technologies makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. Sterlite Technologies obligations shall be only set forth in Sterlite Technologies standard terms and conditions of the sale and in no case, Sterlite Technologies be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product.

Users of Sterlite Technologies products should make their own evaluation to determine the suitability of such each product for the specific application.