

STL Fibre Management System (FMS) shelf series is ideal for high density front patching applications. Its compact design and high density capacity allows it to deliver carrier class fibre management to central offices, POPs, FTTx, mobile systems and LANs.

#### **Features**

- Splicing to factory terminated pigtails
- · Provision for cable anchoring
- Easy Access to splice tray
- Multiple connector options. Easy inter-changeability
- Cable entry from rear side. Radius controlled cable routing
- Front Access to cable connectors
- Screen printed panels for easy identification
- Colour RAL 7035

#### **Applications**

- Splicing to factory terminated pigtails
- FTTH Deployments
- PTP Networks
- Optical CATV Networks
- Local Area Networks

## **Product Specification - Splice & Patch**


| Description | Capacity<br>(fibre count) | Dimensions (mm) |     |     | Max. Capacity     |          | No. of<br>Splice |
|-------------|---------------------------|-----------------|-----|-----|-------------------|----------|------------------|
|             |                           | н               | w   | D   | Std<br>(SC/E2000) | SFF (LC) | Trays            |
| FK-WMB-S    | 12F                       | 400             | 300 | 120 | 12                | 12       | 1                |
| FK-WM-J     | 24F                       | 400             | 300 | 120 | 24                | 24       | 2                |
| FK-WMB-K    | 48F                       | 400             | 300 | 120 | 48                | 48       | 4                |
| FK-WMB-M    | 72F                       | 400             | 300 | 120 | 72                | 72       | 6                |

<sup>\*</sup> Multiple option for Splice tray available on request


# **Product Specification - Only Splice**

| Description | Capacity<br>(fibre count) |     | No. of<br>Splice |     |       |
|-------------|---------------------------|-----|------------------|-----|-------|
|             |                           | w   | н                | D   | Trays |
| FK-WMB-S-S  | 12F                       | 400 | 300              | 120 | 1     |
| FK-WMB-S-J  | 24F                       | 400 | 300              | 120 | 2     |
| FK-WMB-S-K  | 48F                       | 400 | 300              | 120 | 4     |
| FK-WMB-S-L  | 72F                       | 400 | 300              | 120 | 18    |

# **Ordering Information (Splice & Patch)**

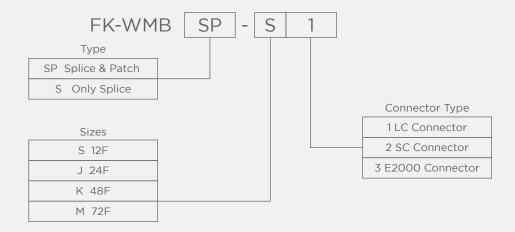

### **Highlighted Product Specification**

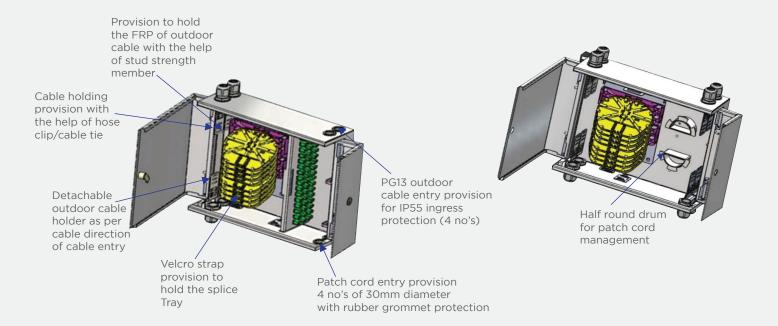

| Type of WM ( capacity) | No of cable entries | PG Gland type | No. of patch cord entries<br>with rubber grommet<br>protection |
|------------------------|---------------------|---------------|--|
| 24F                    | 4                   | PG13          | 4 (25mm)   |
| 48F                    | 4                   | PG13          | 4 (25mm)   |
| 72F                    | 4                   | PG13          | 4 (25mm)   |

02/082023

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, Sterlite Technologies makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. Sterlite Technologies obligations shall be only set forth in Sterlite Technologies standard terms and conditions of the sale and in no case, Sterlite Technologies be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product.