


Yoga-Lite

Multitube Gel Filled Duct and ADSS OFC
12F - 144F | Bow Lite(E) - G.657.A2 Single Mode Fibre

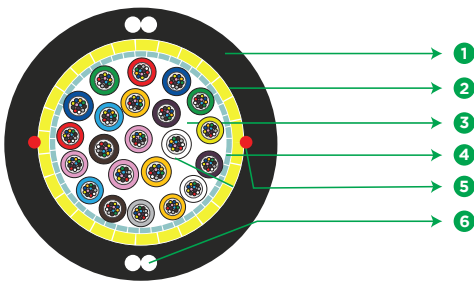

1 OUTER JAKET

2 ARAMID YARNS

3 GEL FILLED TUBE

4 WATER BLOCKING TAPE

5 RIPCORD(S)

6 STRENGTH MEMBER

* Typical Construction Diagram - Not to Scale

Features & Benefits

- Reduced diameter micro-modules manufactured from soft and flexible elastomeric material
- Diametrically opposed embedded strength members provides excellent crush protection performance
- Fibre micro-modules are kink resistant and easily removed without the need for tools
- Fast and easy midspan access

Product Details

YogaLite Single Jacket Cable by STL is based on micro-module technology to create an optimized design suitable for use in Duct/Aerial scenarios. The micro module unit consists of group of fibres protected by an easily strippable and flexible thermoplastic material and filled with thixotropic compounds. These microstructures are surrounded with water swelling elements to protect against moisture ingress, and are constrained in a thermoplastic sheath, which is provided with embedded strength members to protect from buckling.

Fibres and Cable Performance Standards

Cable complies with the following standards IEC 60793, IEC 60794, ITU-T, RoHS, REACH.

Printing Details

Printing: STERLITE SM G657A2 FIBRE TYPE YOGALITE D/A LASER SYMBOL TELEPHONE SYMBOL YEAR OF MANUFACTURING LENGTH CODE METER MARKING.

Note: The accuracy of marking shall be + 0.5%. Occasional loss of printing & remarking shall be as per Bell core GR 20 and this supersedes the earlier markings.

Specifications

Physical Characteristics	
Fibre Count	12-144
Fibre Type	STL Fibre ITU-T G.657 A2
Maximum Cabled Attenuation (dB/km)	1310nm : 0.36, 1550nm : 0.23, 1625nm : 0.26
Link Design PMD (ps/sqrt.km)	≤ 0.1
Fibres per Tube	12
Peripheral Strength Members	High Strength Aramid Yarns
No of Ripcords Below Outer Sheath	2
Embedded Strength Member	FRP (Fibre Reinforced Plastic)
Outer Jacket Material	UV Proof Black Polyethylene

Fibres Colour Sequence (as per DIN/VDE 0888)^{1,2}

Red	Green	Blue	Yellow	White	Grey	Brown	Violet	Turquoise	Black	Pink	Orange
-----	-------	------	--------	-------	------	-------	--------	-----------	-------	------	--------

Note: ¹The tubes 13 to 24, when present, have a black single intermittent ring stripe marking with width of 2 to 3 mm. ²Other fibres colour sequences are available on demand, prior approval.

Cable Characteristics						
Product Code	Fibre count	Fibre Type	No. of Tubes	Cable Diameter (mm) ±5%	Cable Weight (kg/km) ±10%	Max. Tensile Strength (N)
H20012S201GFP10000	12	G.657 A2	1	6.5	35	740
H20024S202GFP10000	24	G.657 A2	2	7.5	42	880
H20048S204GFP10000	48	G.657 A2	4	8.5	57	1200
H20072S206GFP10000	72	G.657 A2	6	9.5	67	1400
H20096S208GFP10000	96	G.657 A2	8	10.5	82	1680
H20144S212GFP10000	144	G.657 A2	12	11.5	96	2000

Specifications

Mechanical & Environmental Characteristics		
Cable Characteristics	Cable Performance	Testing Standard Method
Tensile Strength	As per above tables	IEC-60794-1-21-E1
Crush Resistance (N/cm)	2000	IEC-60794-1-21-E3
Impact Strength(Nm)	5	IEC-60794-1-21-E4
Torsion	$\pm 180^\circ$ /m, L=80N	IEC-60794-1-21-E7
Static Bend Radius	15D	IEC-60794-1-21-E11
Kink Radius	10D	IEC-60794-1-21-E11
Water Penetration Test	1m head, 3m samples, 24 hrs, no water penetration	IEC-60794-1-22-F5
Drip Test	30 cm, 70° C, 24 hr	IEC-60794-1-21-E14
Friction co-efficient in ducts	$f \leq 0.35$	
Temperature Performance		IEC-60794-1-22-F1
Installation	-5° C to +50° C	
Operation	-30° C to +70° C	
Storage	-40° C to +70° C	

Note: All tests shall be carried out as per IEC standards. Change in attenuation after and before testing shall be ≤ 0.05 dB/km for Single Mode fibre.

Packing and Lengths

Drum Type	Length Multiple (in km)	Order Tolerance	Short Lengths
Wooden Drums	2/4 \pm 5% (For all Fibre Counts)	$\pm 5\%$	Max 5%, Customer Approval

Ordering Information

Other Fibres counts, types and tube colours sequences may be available on request, please create product code from the table below.

Product type		Fibre count (0012 - 0144)				Fibre type		No. of active tubes (01-12)		Cable core type	Fibres/tubes colour code		Jacket type		Running number		Special requirement	
		1				2		3			4							
H	2	-	-	-	-	-	-	-	-	G	-	-	P	1	0	0	-	-

1. Fibre count by indicating the corresponding number from 0012 to 0144
2. Fibre code corresponding to requested fibre type among following options

Fibre code		Fibre type (ITU-T)	STL's Fibre Name
S	2	G.657 A2	BOW-LITE (E)

3. Number of active tubes : 01 to 24
4. Fibres and tubes colour sequence available options⁴

Code	Fibres and Tubes Colour Codes
A	EIA/TIA 598 C
D	DIN/VDE 0888
F	France
H	Switzerland
I	Italy
L	Hungary
M	Poland

Note: ⁴other colour codes are available on demand prior STL approval

For additional information please contact your sales representative.

You can also visit our website at www.stl.tech

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, STL makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. STL obligations shall be only set forth in STL standard terms and conditions of the sale and in no case, STL be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product. Users of STL products should make their own evaluation to determine the suitability of such each product for the specific application.