

**Wattages: 50W, 70W, 100W / Tunable Wattages: 30W/50W/60W/70W**

Tuneable LED Glass Wall Pack series can be widely used indoor or outdoor (wet location). Ideal for mechanical or electronic workshops, storage warehouses, steel mills, gas stations, toll booths, railway platforms and much more.



**WATT/CCT**  
FIELD-ADJUSTABLE

## FEATURES

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V/AC 277-480V.
- Excellent optics design, greatly improve the light utilization and evenness.
- Motion sensor control available (Optional)
- 1-10V Dimming.


Die-cast aluminum cooling design, high quality and better cooling for LED Tj < 85°C.



SPECIFICATION				
WATTAGE	50W	70W	100W	30W/50W/60W/70W
LUMEN	6600 lm	9380 lm	13500 lm	4368 / 6821 / 8047 / 9032 lm
EFFICACY	132 lm/W	134 lm/W	135 lm/W	up to 129 lm/W
CCT	4000K, 5000K			3000K/4000K/5000K
CRI	70			
INPUT VOLTAGE	120-277V			
POWER FACTOR	0.95			
DRIVER EFFICACY	90%			
LIGHT ANGLE	87° X 118°			
LIFE SPAN	75,000 hrs			
WORKING TEMPERATURE	-22°F ~ 113°F			
STORAGE TEMPERATURE	-40°F ~ 176°F			
OUTDOOR RATING	IP65 Rating			
CABLE	Input Connect, No cable			
WARRANTY	5 year limited			

**Wattages: 50W, 70W, 100W / Tunable Wattages: 30W/50W/60W/70W**

## DIMENSION

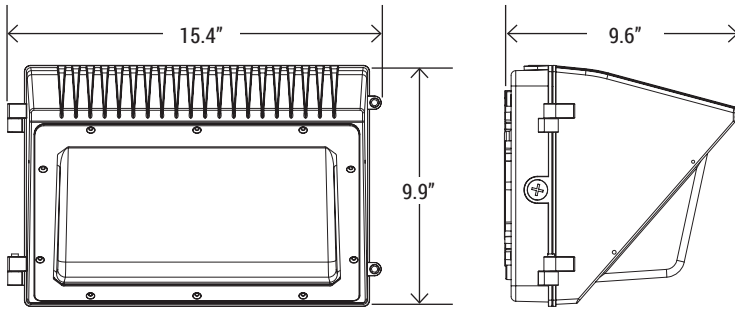

WATTAGE	50W	70W	100W	3567W
NT. WEIGHT	9.92 lbs	10.4 lbs	10.8 lbs	10.4 lbs
BOX DIM.	17.13" x 10.43" x 10.5"			17.72" x 10.43" x 10.5"

## CONTROLS (SOLD SEPARATELY)



P (Photocell)



**WATT/CCT**  
**FIELD-ADJUSTABLE**

## EMERGENCY BACK-UP (SOLD SEPARATELY)



**BLD-CM20N-480800-8W**  
8W Emergency Backup Battery  
LED Driver

**BLD-CM20N-480800-15W**  
15W Emergency Backup Battery  
LED Driver

**BLD-CM20N-480800-20W**  
20W Emergency Backup Battery  
LED Driver

## ORDERING INFORMATION

EXAMPLE:

**1L-GWP-07W-27-50K-P**

1L	GWP	07W	27	50K	D	P
COMPANY	PRODUCT	WATTAGE	VOLTAGE	CCT	FINISH	CONTROL
1000 LED INC	GWP Glass Wall Pack	<b>05W</b> - (50W) <b>07W</b> - (70W) <b>10W</b> - (100W) <b>3567W</b> - (30W/50W/60W/70W)	<b>27</b> (AC120-277V)	<b>40K</b> - (4000K) <b>50K</b> - (5000K) <b>345K</b> - (3000K/4000K/5000K)	<b>D</b> - (Dark Bronze) <b>W</b> - (White) <b>B</b> - (Black) <b>S</b> - (Silver)	<b>P</b> - (Photocell)


**Wattages: 50W, 70W, 100W / Tunable Wattages: 30W/50W/60W/70W**

## PHOTOMETRICS

For complete IES files, please visit our website.


### 1L-GWP-05W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

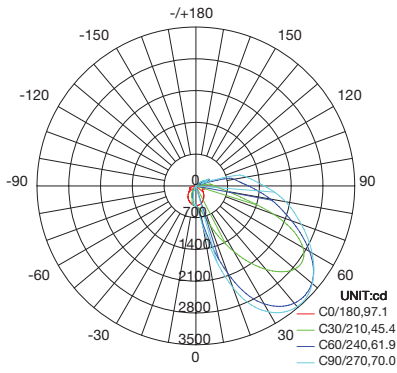


AVERAGE BEAM ANGLE(50%):68.6 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

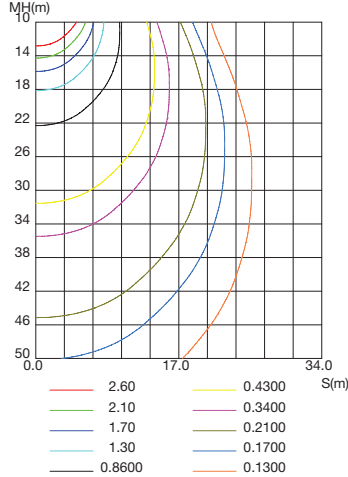


ISOLUX DIAGRAM

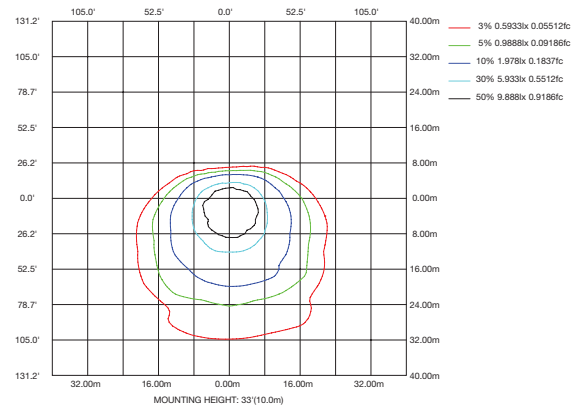


### 1L-GWP-07W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

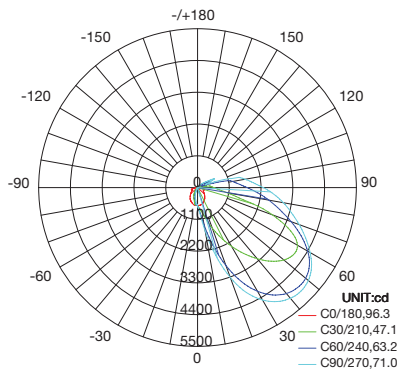


AVERAGE BEAM ANGLE(50%):69.4 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

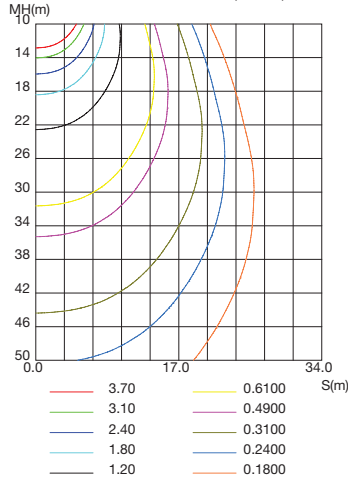


ISOLUX DIAGRAM

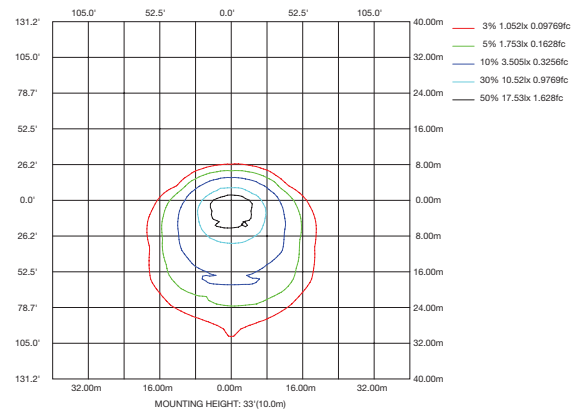


### 1L-GWP-10W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

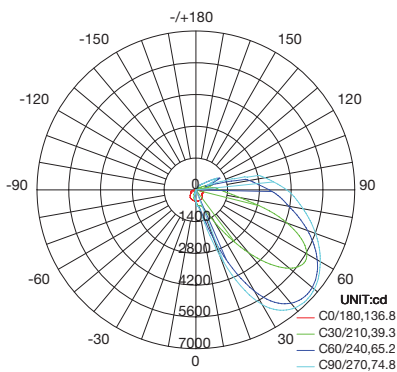


AVERAGE BEAM ANGLE(50%):79.0 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

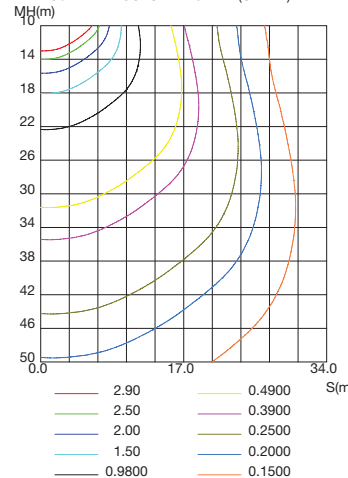

ISOLUX DIAGRAM

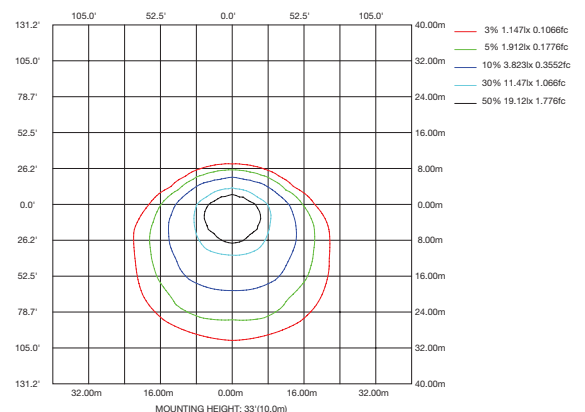


**Wattages: 50W, 70W, 100W / Tunable Wattages: 30W/50W/60W/70W**

## PHOTOMETRICS


For complete IES files, please visit our website.

### 1L-GWP-3567W27-50K (30W@5000K)


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

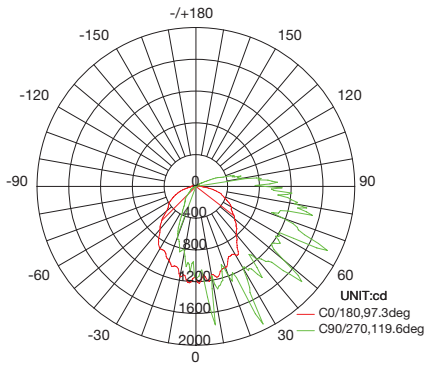

AVERAGE BEAM ANGLE(50%):108.5 DEG

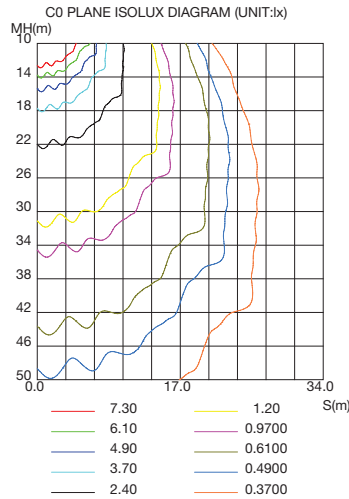


ISOLUX DIAGRAM

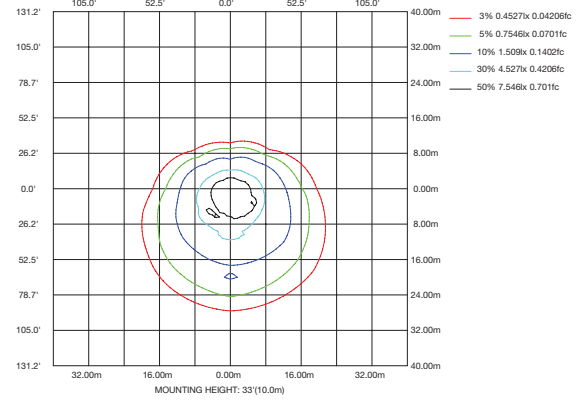


### 1L-GWP-3567W27-50K (50W@5000K)


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

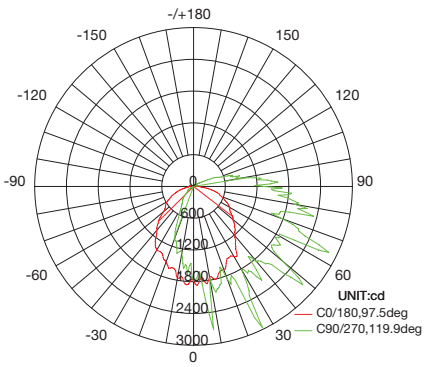

AVERAGE BEAM ANGLE(50%):108.7 DEG

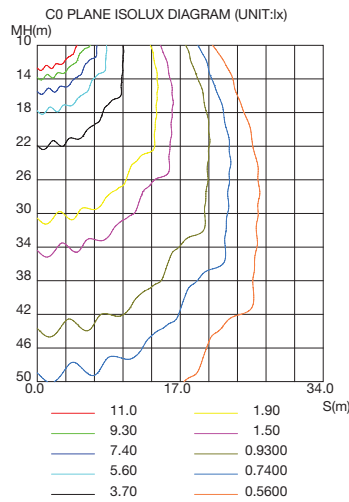


ISOLUX DIAGRAM

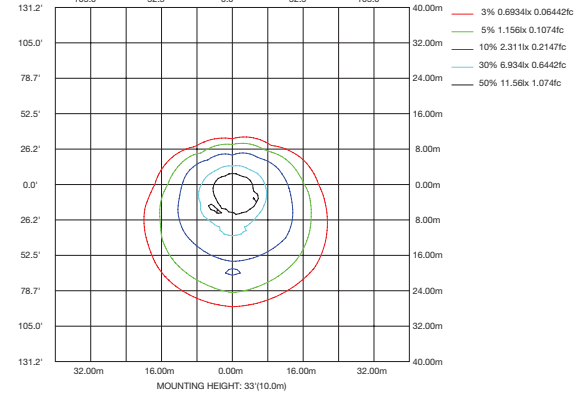


### 1L-GWP-3567W27-50K (60W@5000K)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

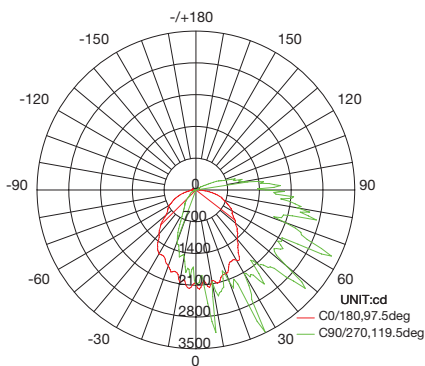

AVERAGE BEAM ANGLE(50%):108.5 DEG

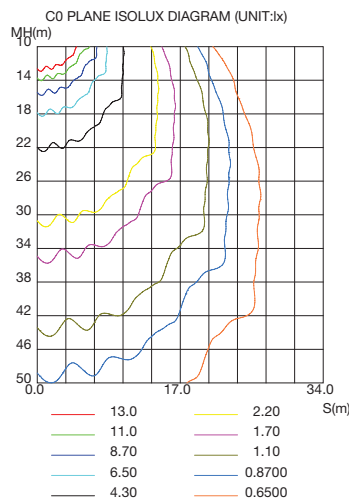

ISOLUX DIAGRAM

