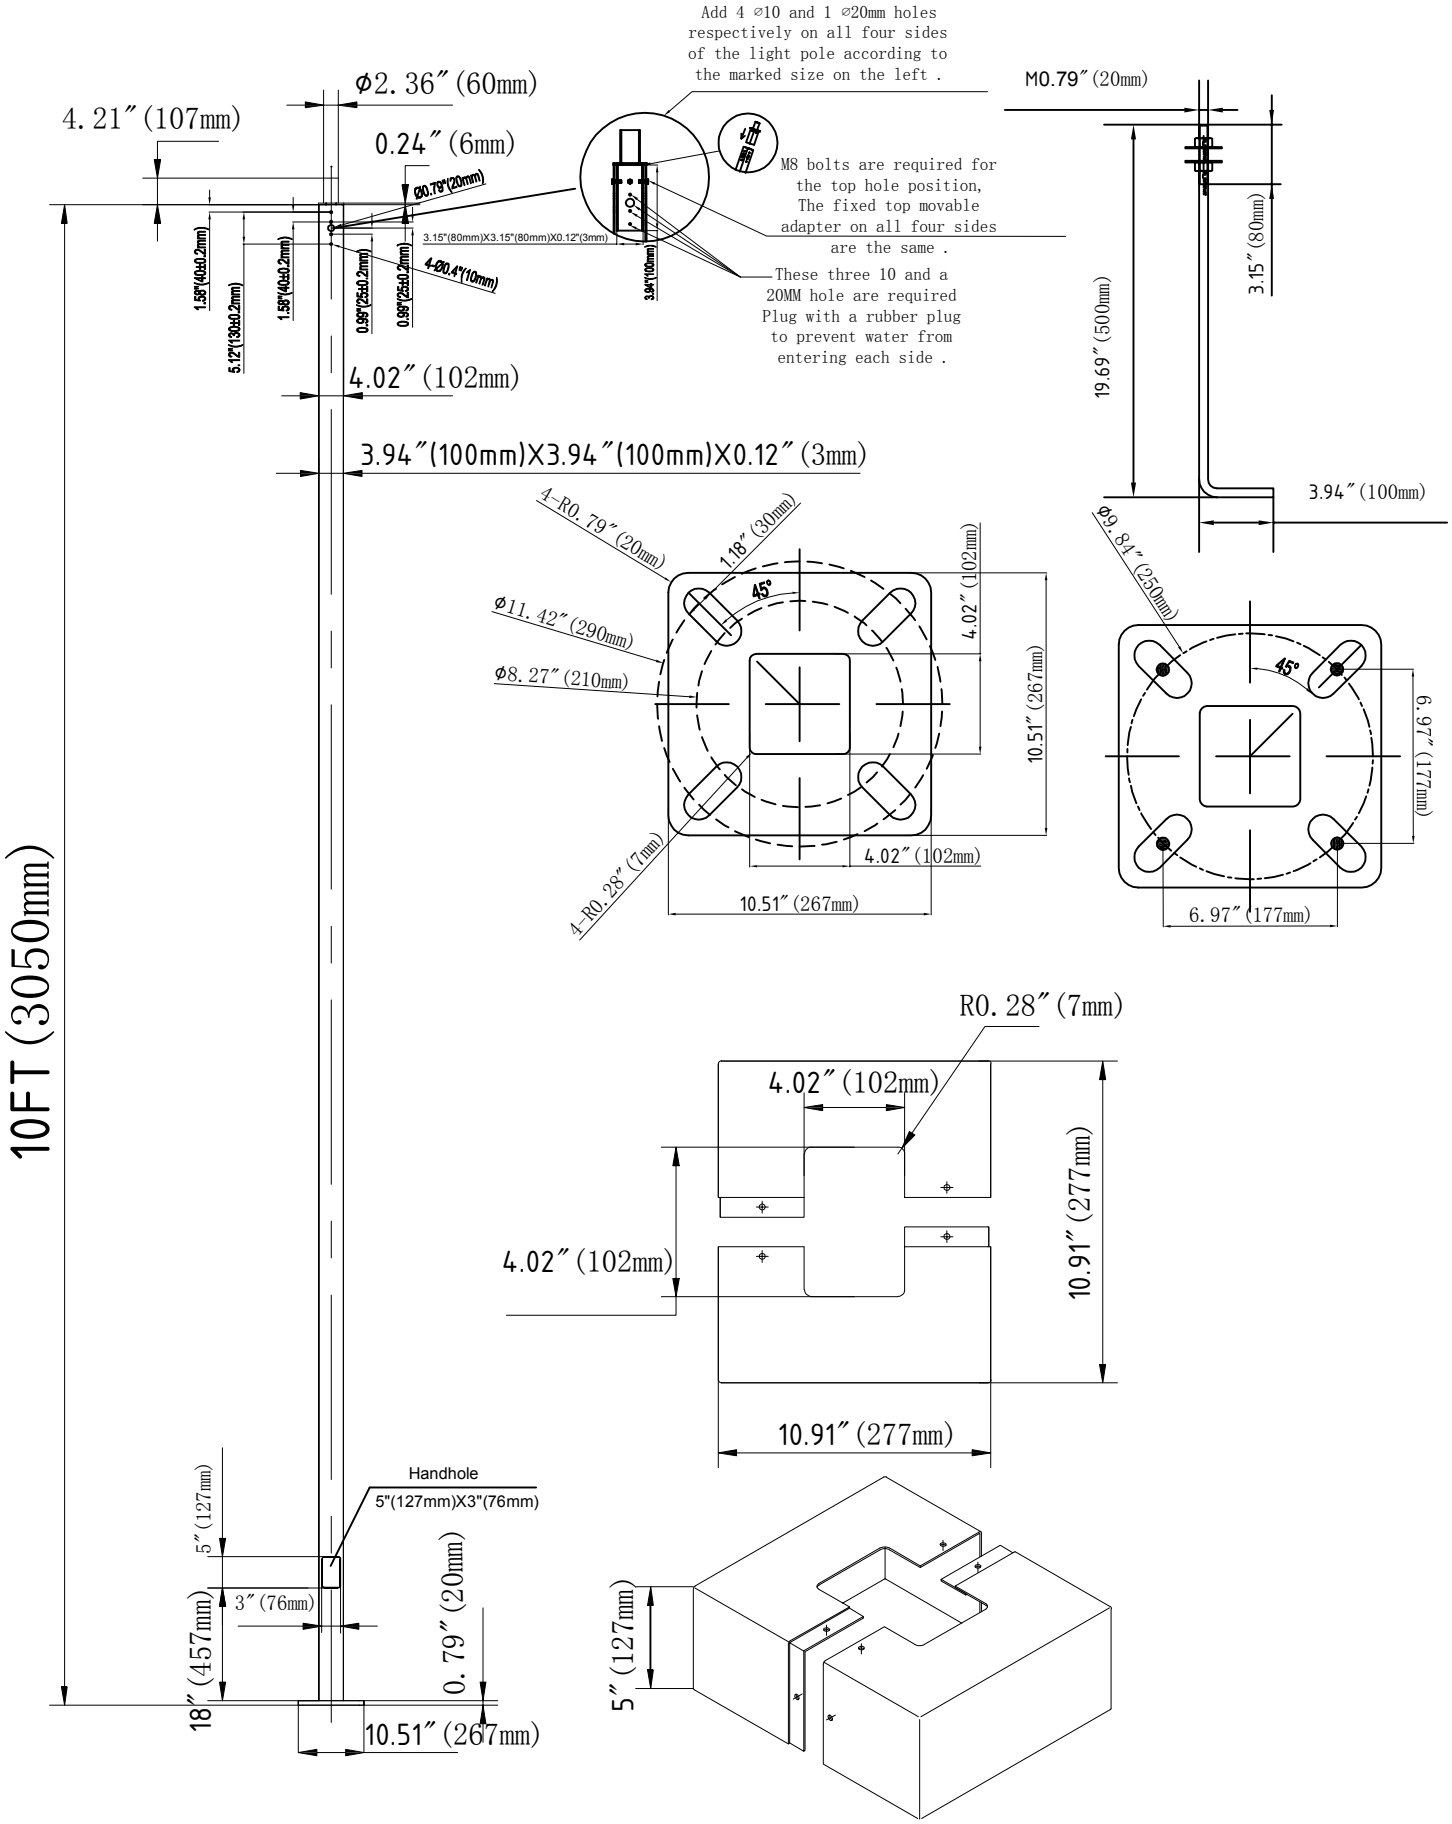
Add 4 ⌀10 and 1 ⌀20mm holes respectively on all four sides of the light pole according to the marked size on the left .
M8 bolts are required for the top hole position, The fixed top movable adapter on all four sides are the same .
These three 10 and a 20MM hole are required Plug with a rubber plug to prevent water from entering each side .
Ø2.36″(60mm)
4.21″(107mm)
0.24″(6mm)
Ø0.79″(20mm)
3.15″(80mm)X3.15″(80mm)X0.12″(3mm)
4-Ø0.4″(10mm)
1.58″(40±0.2mm)
5.12″(130±0.2mm)
1.58″(40±0.2mm)
0.99″(25±0.2mm)
0.99″(25±0.2mm)
3.94″(100mm)
4.02″(102mm)
3.94″(100mm)X3.94″(100mm)X0.12″(3mm)
10FT(3050mm)
M0.79″(20mm)
3.15″(80mm)
19.69″(500mm)
3.94″(100mm)
4-R0.79″(20mm)
1.18″(30mm)
45°
Ø11.42″(290mm)
Ø8.27″(210mm)
4.02″(102mm)
10.51″(267mm)
4-R0.28″(7mm)
4.02″(102mm)
10.51″(267mm)
Ø9.84″(250mm)
45°
6.97″(177mm)
6.97″(177mm)
R0.28″(7mm)
4.02″(102mm)
4.02″(102mm)
10.91″(277mm)
10.91″(277mm)
Handhole
5"(127mm)X3"(76mm)
5″(127mm)
3″(76mm)
18″(457mm)
0.79″(20mm)
10.51″(267mm)
5″(127mm)