





Model FDV350N FDV350LP FDV350NE2 FDV350LPE2

Fuel Natural Gas Propane **Input Max** 37.000 BTU 35,000 BTU Input Min. 29,000 BTU 27,000 BTU FE (P.4.1-15) 66.63% / 67.90% 67.64% / 70.10% Direct Vent Free Standing Stove; a Safe and Efficient Heating Appliance with the Convenience of Gas. Your best choice for installation anywhere throughout your home.

## STANDARD FEATURES

- Millivolt Valve with Hi-Low heat and flame adjustment and allows operation during a power failure
- Proflame II (PF2) Models include Remote Control Features flame, fan, thermostat, smart thermostat and battery backup
- Dual burner system, with realistic flame pattern
- Heat radiating ceramic glass with panoramic view from three sides
- Mobile home approved
- Approved for installation in a bedroom or bed sitting room
- Black Louver
- Fibre Oak Log Set with Embers\*

#### **OPTIONAL FEATURES**

#### Fan Kit

Heat activated with variable speed control

# **Brick Refractory Liner**

Traditional Brick

### **Thermostat**

Wall Mount Millivolt Thermostat or Programmable Thermostat

#### Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating,

### B-Vent Adapter (Convert Stove to 4" B-Vent)







# **MINIMUM CLEARANCES** TO COMBUSTIBLES

**12"** from side of unit

3" from back of unit

from side of unit in corner


#### **ALCOVE INSTALLATION**

depth (max.) 55½" height (max.) **52½"** width (max.)


ients may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be change without notice or obligation. Certified for USA and Canada to: ANSI 221.88-2017 (CSA 2.3-2017, CSA 2.17-2017 as a Vented Gas Fireplace Heater.



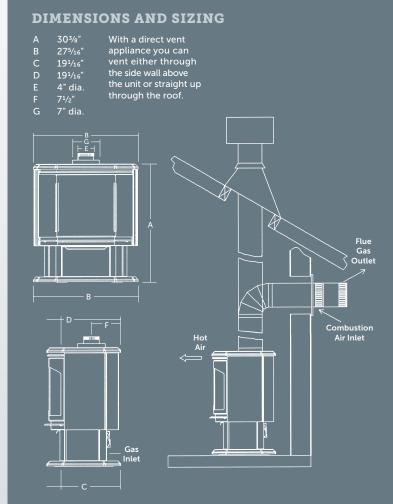









Safety