



On a tous
droit au
design



invicta.fr

PROFESSIONAL
CATALOG

8,99€ - 0320



3 244330 910968

made in
france

INVICTA

CAST IRON STOVES

AARON

Designed with two front sides, it's easy to find the perfect spot for your new Aaron fireplace. This stove is ideal for large logs and offers a stunning panoramic view of its flames. Simply place it on a raw material such as stone or on one of its benches (sold separately). Bench available in 2 sizes.

H 610 x W 910 x D 481 mm - Diameter of nozzle 180 mm. Smoke exhaust: Top. (Comparative tables - p142)

Option: bench 1M Ref. P696131 - bench 1.6M Ref. P696128



ELTON

Elton is an efficient stove with a simple, modern look. It prominently displays the flames and can accommodate large logs.

H 830 x W 910 x D 490 mm - Diameter of nozzle 180 mm. Smoke exhaust: Top or Back. (Comparative tables - p144)



NELSON

The two glass sides of our Nelson stove give a unique character to your home. Cozy evenings await. Settle in on either side of the stove, and listen to the unmistakable sound of the crackling fire as you watch the flames dance.


H 930 x W 910 x D 490 mm - Diameter of nozzle 180 mm. Smoke exhaust: Top. (Comparative tables - p146)



PRESTON

The Preston cast-iron stove is simple and modern. With its rectangular shape, it can easily be raised on a bench (offered separately) or on a concrete slab. Optional bench sold separately in 2 sizes.

H 610 x W 910 x D 489 mm - Diameter of nozzle 180 mm. Smoke exhaust: Top or Back. (Comparative tables - p147)



Heating surface	75 to 170 m ²
Optimal Power	14 kW
Consumption	4.7 kg wood / hour
Power modulation	9.5 to 21 kW
Maximum length of the logs	80 cm

Colour selection:

Option: bench 1M Ref. P696131
bench 1.6M Ref. P696128

P612804



Heating surface	65 to 145 m ²
Optimal Power	12 kW
Consumption	4 kg wood / hour
Power modulation	8 to 18 kW
Maximum length of the logs	80 cm

● P612804



Heating surface	75 to 170 m ²
Optimal Power	14 kW
Consumption	4.7 kg wood / hour
Power modulation	9.5 to 21 kW
Maximum length of the logs	80 cm

● P612744



Heating surface	65 to 145 m ²
Optimal Power	12 kW
Consumption	4 kg wood / hour
Power modulation	8 to 18 kW
Maximum length of the logs	80 cm


● P612844

TECHNICAL DATA

Designation	Ductable stoves	61	65	64	64	92	75							
ELO M		P610248		P610244		MOAÏ		P614244		P61944X		P612904		P916644
Height	880	920	716	1398	1000	610	744							
Width	500	500	613	560	550	910	644							
Depth	374	374	619	457	590	481	556							
Flue diameter	150	150	150	180	150	180	150							
Flue height	-	-	572	1233	862	-	616							
Log length (cm)	33	33	30	35	38	80	50							
Weight (kg)	110	100	160	240	192	179	133							

HEATING PERFORMANCE

Optimal heat output (kW) ¹	5	5	8	8	8	12	8
Heat output adjustment ²	3 to 7.5	3 to 7.5	5 to 12	5 to 12	5 to 12	8 to 18	5 to 12
Efficiency (%) ³	75	75	78	77	76	70	75
CO level (%) ⁴	0.09	0.09	0.04	0.08	0.13	0.15	0.12
Performance rate ⁵	0.5	0.5	0.2	0.4	0.7	1.2	0.7
Flamme verte ⁶ / Ecolabel	7 ★ / A	7 ★ / A	7 ★ / A	7 ★ / A	6 ★ / A	7 ★ / A	7 ★ / A
Compatible with BBC RT 2012 ⁷	Yes	Yes	Yes	Yes	Yes	No	No
Ductable	Ø 80 mm	Ø 80 mm	Ø 100 mm	Ø 100 mm	Ø 100 mm	No	No
Eligible for tax credit in France ⁸	Yes	Yes	Yes	Yes	No	No	Yes
Autonomy	8 H	8 H	Intermittent	8 H	8 H	Intermittent	8 H
Extended burning ⁹	65/150	105/240	105/240	105/240	105/240	160/360	105/240
Heating volume (m ³) ¹⁰	25/60	25/60	40/100	40/100	40/100	65/145	40/100
Heating surface (m ²) ¹¹	Yes	Yes	Yes	Yes	Yes	No	Yes
Post combustion system ¹²	Yes	Yes	No	Yes	Yes	No	Yes
Adjustable secondary air ¹³	Yes	Yes	No	No	No	Yes	Yes
Warranty ¹⁴	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240	EN13240
Finish	White	Anthracite	Anthracite	Anthracite	Anthracite, Chrome	Anthracite	Anthracite

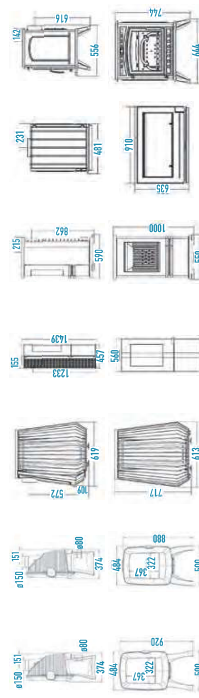

TECHNICAL DATA

Designation	Cast iron stoves	87	73	90	77	74	78	79	79									
ANGOR		P618644		P611444		P645344		P915144		P91734X		P916244		P614744		P615614		P615644
Height	85	868	1050	1220	690	690	950	1200	1200									
Width	820	1051	527	532	730	600	513	560	560									
Depth	471	480	453	444	579.5	378	403	415	578									
Flue diameter	150	180	150	180	150	150	150	180	180									
Flue height	-	-	-	-	509	-	516	-	-									
Log length (cm)	66	71	40	40	54	56	40	44	44									
Weight (kg)	153	188	123	169	167	105	103	160	160									

DIMENSIONS AND WEIGHT

Height	770	868	1050	1220	690	690	950	1200	1200
Width	820	1051	527	532	730	600	513	560	560
Depth	471	480	453	444	579.5	378	403	415	578
Flue diameter	150	180	150	180	150	150	150	180	180
Flue height	-	-	-	-	509	-	516	-	-
Log length (cm)	66	71	40	40	54	56	40	44	44
Weight (kg)	153	188	123	169	167	105	103	160	160

HEATING PERFORMANCE

Optimal heat output (kW) ¹	12	12	8	12	9	8	8	10	14
Heat output adjustment ²	8 to 18	8 to 18	5 to 12	8 to 18	6 to 13.5	5 to 12	5 to 12	6.5 to 15	6.5 to 21
Efficiency (%) ³	77	77	78	75	75	77	75	76	78.7
CO level (%) ⁴	0.10	0.1	0.07	0.10	0.10	0.12	0.09	0.09	0.05
Performance rate ⁵	0.6	0.7	0.4	0.6	0.6	0.5	0.7	0.5	0.5
Flamme verte ⁶ / Ecolabel	7 ★ / A	7 ★ / A	7 ★ / A	7 ★ / A	7 ★ / A	7 ★ / A	7 ★ / A	7 ★ / A	7 ★ / A
Compatible with BBC RT 2012 ⁷	No	No	No	No	No	No	No	No	No
Ductable	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Eligible for tax credit in France ⁸	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Autonomy	8 H	8 H	8 H	8 H	8 H	8 H	8 H	8 H	8 H
Extended burning ⁹	160/360	160/360	105/240	160/360	125/275	105/240	105/240	135/300	185/425
Heating volume (m ³) ¹⁰	65/145	65/145	40/100	65/145	50/110	40/100	40/100	55/120	75/170
Heating surface (m ²) ¹¹	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Post combustion system ¹²	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Adjustable secondary air ¹³	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Warranty ¹⁴	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2	EN13240 BImSchV2
Finish	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite, Red	Anthracite	Anthracite	Anthracite	Anthracite

