
# **Dimplex**®

## Multi-Fire® SL

42" Slim Linear Electric Fireplace

PLF4214-XS

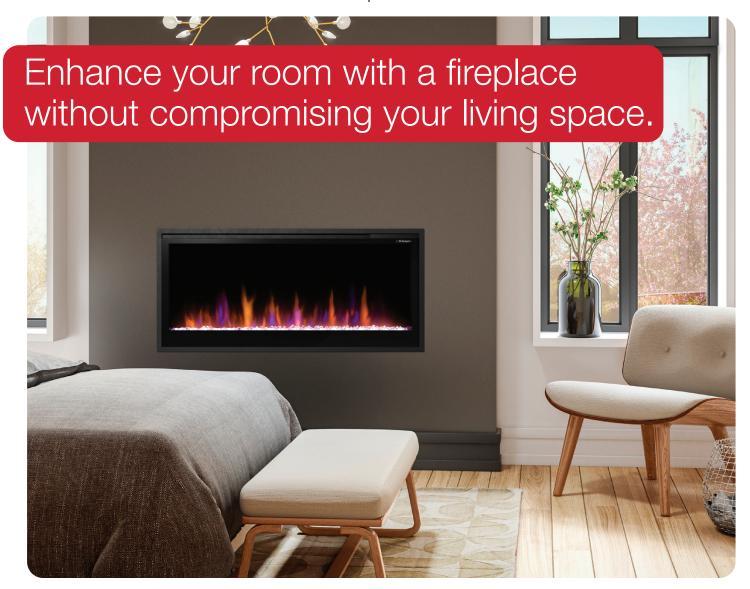

With an incredibly shallow four inch depth, the Slim Linear lets builders, designers, property managers and homeowners incorporate a stylish, linear fireplace where space is limited, like condos, townhouses or for easy renovation projects without the need to build out from an existing wall. The Slim Linear electric fireplace sits flush into 2" x 4" framing - a game-changing and industry exclusive design.








## Multi-Fire® SL

## 42" Slim Linear Electric Fireplace

# **Hidden Touch Controls** Built-in touch controls include settings and temperature displays that are hidden when not in use 19-1/2" 49.7 cm 43-1/4 3-3/4" 109.8 cm 4 9.7 cm

#### Media Bed Color Themes



120 Volts | 1,500 Watts | 5,000 BTU | 12.5 Amps

Model #	Description	Lbs/Kg	UPC	Wty.	Carton Dimensions (WxHxD)		Cube	
					inches	cm	Ft³	M <sup>3</sup>
PLF3614-XS	36" Linear Fireplace		781052 137318					
PLFXSPLUG	Plug Kit		781052					

## **PLF4214-XS**

#### **Features**

#### Multi-Fire® SL Effect

Large, high-contrast flames feature a multi-layered color effect that creates a sense of depth. Color settings can be controlled independently or combined in one of the five preset options.



#### Media Accent Colors

Choose from a variety of brilliant color themes or cycle through a range of colors using the custom mode, freezing on the hue of your choice.



#### **Customizable Flame**

The Multi-Fire technology allows you to adjust the speed of the flame to create the perfect atmosphere to suit your mood or room.



#### Full Viewing Area

A slim size doesn't mean sacrifice. This smart design delivers an impressive viewing height of 14" and includes mirror technology that creates a grand illusion of depth.

#### → Slim Design

Installs flush into a 2"x4" wall for a seamless look or can be wall mounted (bracket included) for quick and easy installation.



#### Flush Framing

Removable factory-installed trim allows finish material right to the edge for a clean, flush finish.



## Air Circulation Mode

A smart feature that moves room air to keep it fresher.



### Built-in Timer

Automatically turns the unit off after up to 8 hours.



## Heat Management

Enjoy the ambiance of a fire during the warmer months by deactivating the heater via the controls or hard disconnect the heater during installation when heat is not required.



#### **Smart Self-Diagnostics**

Integrated smart technology that works behind the scenes to enhance the performance of your fireplace by providing maintenance and operation feedback.



Hardwire to 120V power supply or purchase an optional 120V plug-in cord kit.

Specifications, finishes and dimensions are subject to change. †Limited warranty. @2020 Glen Dimplex Americas.

SE-567-R00-102920






## Multi-Fire® SL

## 42" Slim Linear Electric Fireplace

**PLF4214-XS** 

Wiring -Junction Box


### **Product Dimensions:**

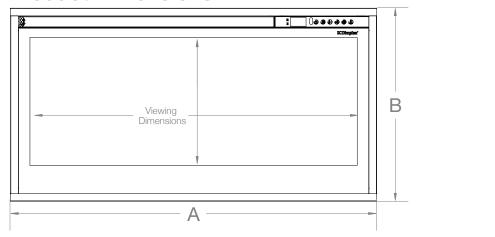


Product	A WIDTH (in/cm)	B HEIGHT (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxH (in/cm)
PLF4214-XS	43-1/4 (109.8)	19-1/2 (49.7)	3-3/4 (9.7)	39-1/4 x 13 (99.7 x 33.0)

## **Framing**

#### Installation - 2 Mounting Options



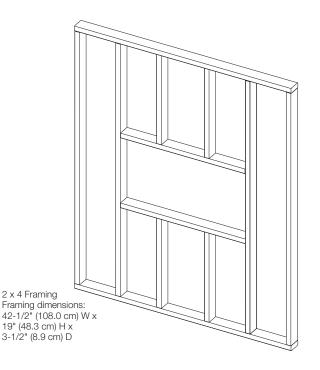

The Firebox is not load bearing. Do not stack weight of the frame on top of the firebox.

It is recommended that the bottom of the unit be mounted between 20 in. (50.8 cm) and 40 in. (101.6 cm) from the ground to maintain an optimized viewing angle of the flame.