

Mason-Lite Masonry Vent Less Fireplaces



*Fireplace Installed by Western Fireplace Supply
shown with optional Empire Comfort vent free log set*

***OUR LIGHTWEIGHT, GAS-BURNING MASONRY FIREPLACES
ARE TAKING THE HEARTH INDUSTRY BY STORM.***

*Available in 39", 44" and 49" units, our Vent Free systems
add value and elegance to a home without the mess and
hassle of old-fashioned, wood-burning fireplaces.*

MASON-LITE
by MFI • Masonry Fireplace Industries, LLC

Vent Free Series

Designed for easy multi-floor installations, our lightweight masonry fireplace systems meet all necessary U.S. building codes for outdoor / indoor construction.

Standard Fireboxes in Three Sizes:*

- MFP39VF (39"):
- MFP44VF (44"):
- MFP49VF (49"):

Custom Vent Free units available at www.Mason-Lite.com/CustomOrder


Features and Benefits:

- Indoor or Outdoor Installation
- Fireplace system ready for your choice of Vent Free Log Set
- Indoor units: Maximum BTU of 40,000 for Indoor (Zero clearance to combustibles)
- Outdoor units: Higher BTU limit (need 2" clearance to combustibles)
- Clean and Environmentally Friendly: Lower outputs of carbon monoxide, pollutants, and particulate matter compared to wood-burners
- Convenient, No-Mess Operation:
 - Free from sparks and long-burning embers
 - No chimney cleaning
 - No messy ashes or wood chips
 - No wood storage space needed
- Optional firebrick panels for an authentic fireplace look-and-feel
- NO Flue for reduced framing requirements- Architects love it!
- Compliant with ANSI-Z 21.50 gas fireplace standard for use with any ANSI Z21.11.2 approved gas logs

*Always Check Local Building Codes before purchase


Product Specifications

(Three firebox sizes available)

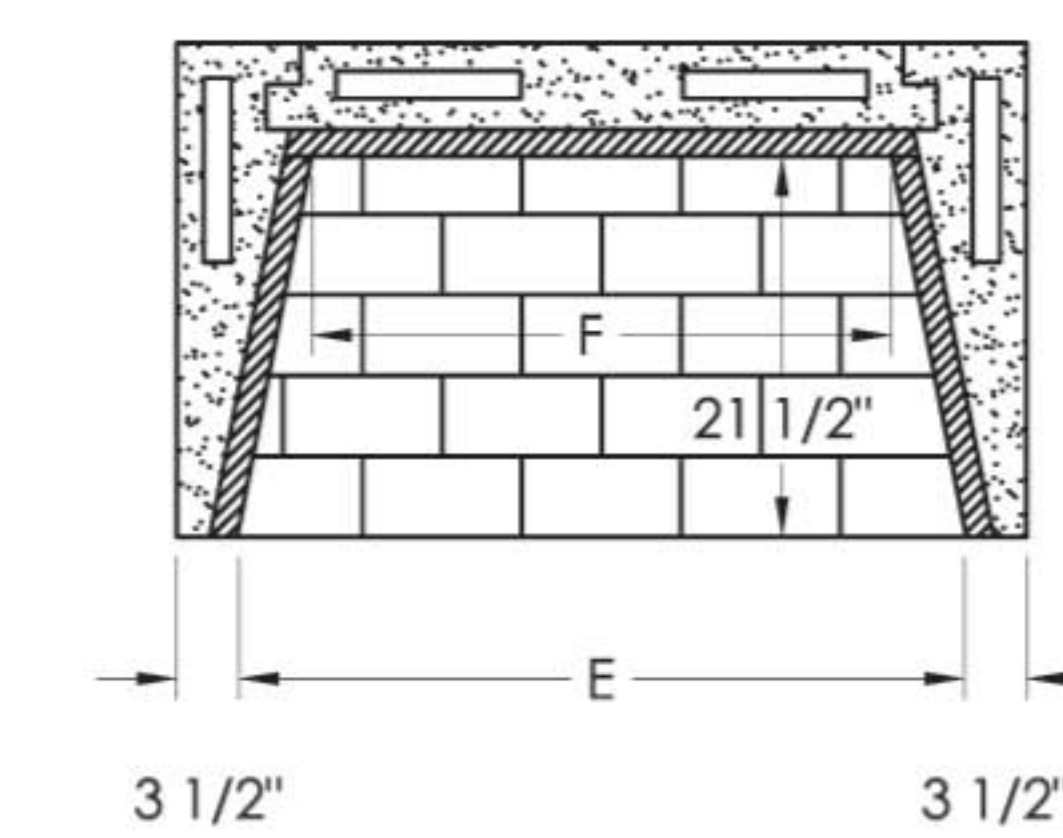

Weight

- MFP49VF- 1001 Lbs.
- MFP44VF- 933 Lbs.
- MFP39VF- 845 Lbs.

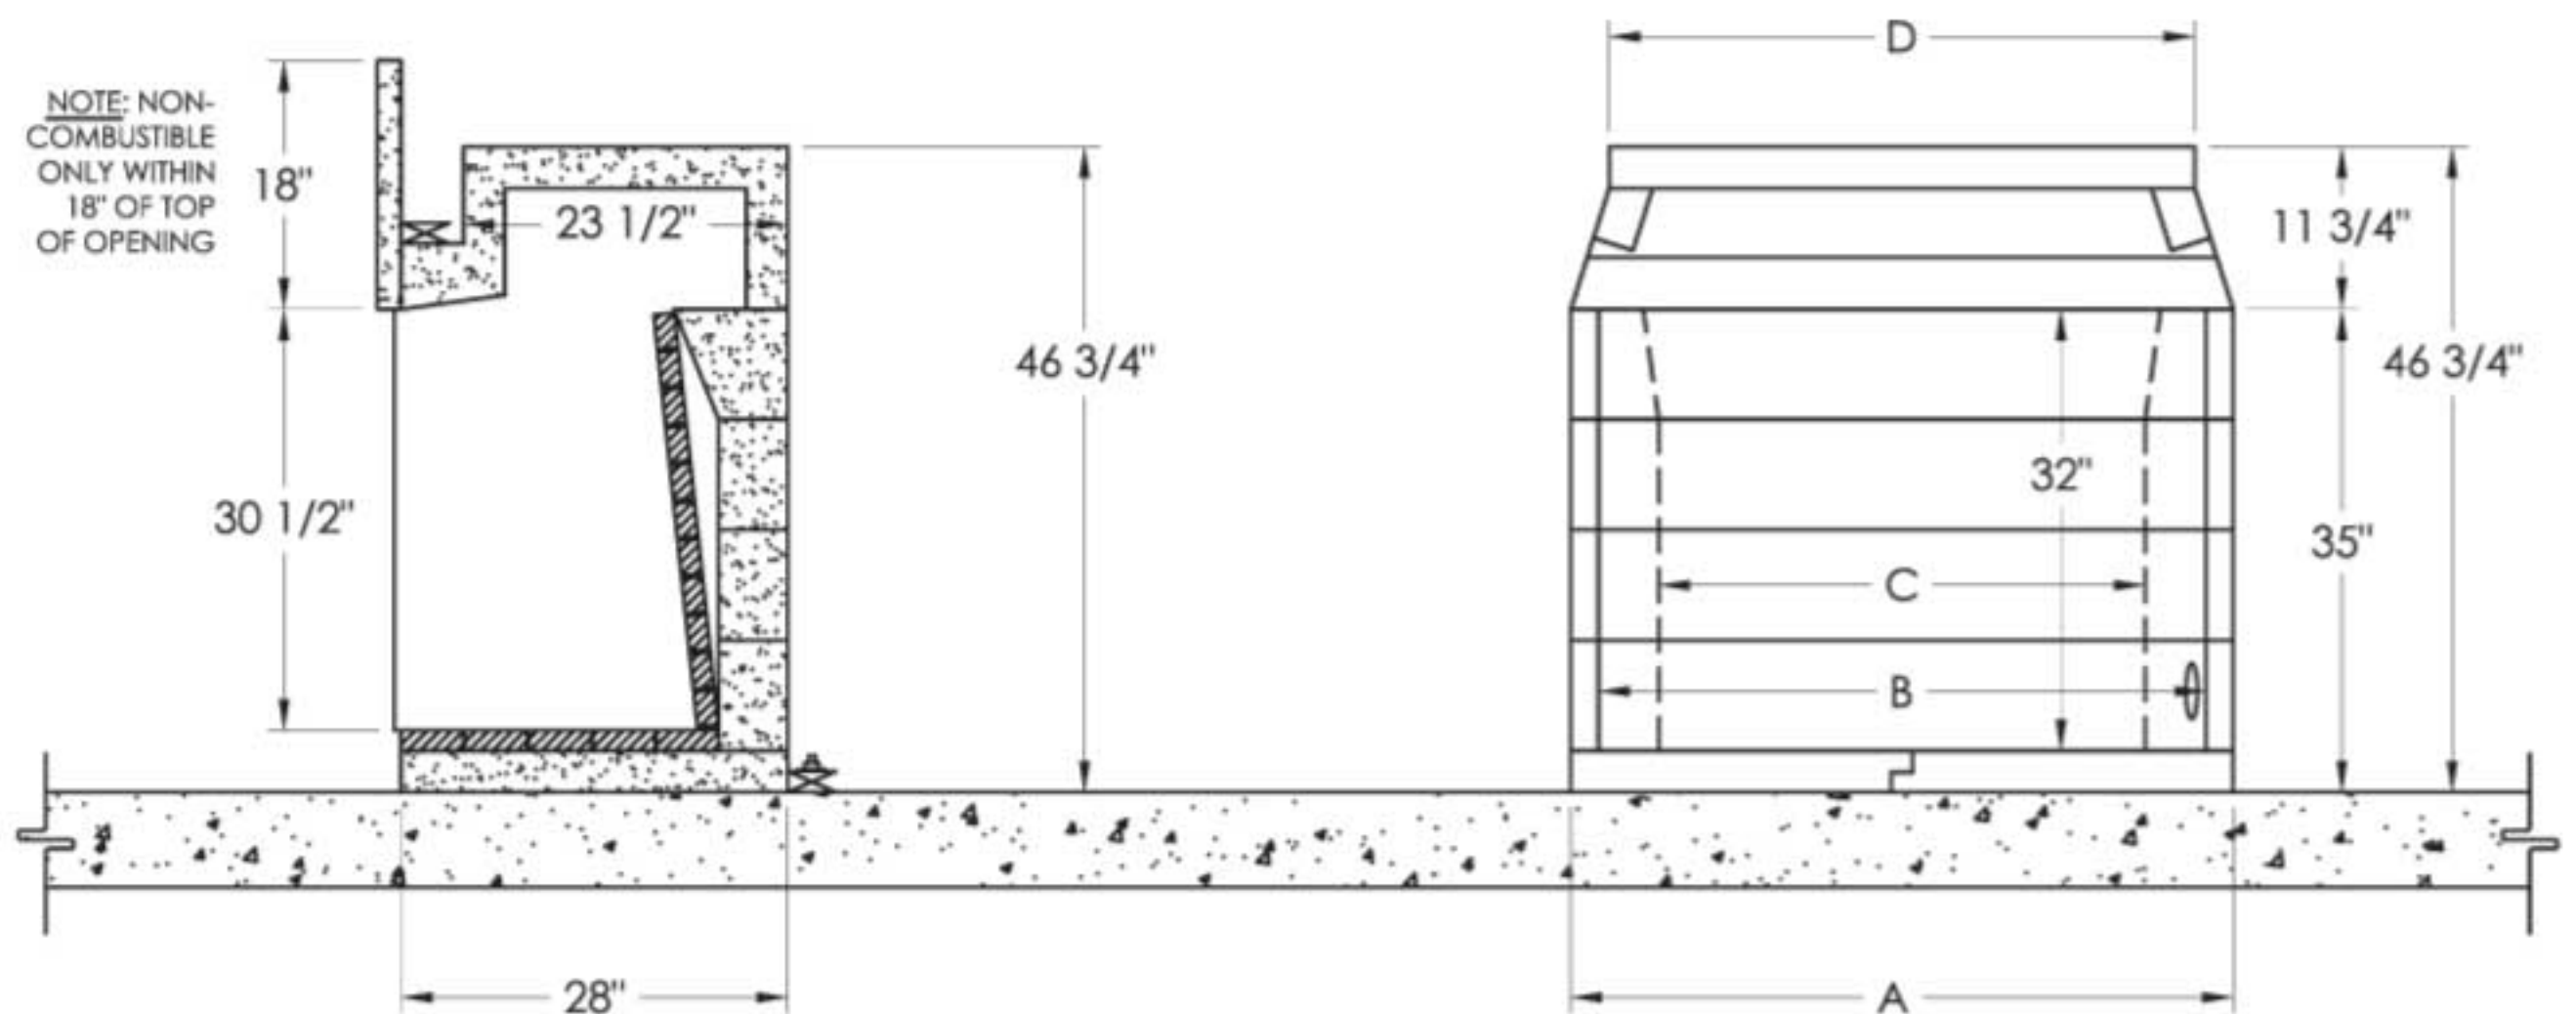

Nominal Sizes

| | A | B | C | D | E | F |
|---------|-----|-----|----------|----------|-----|----------|
| MFP49VF | 53" | 49" | 40 ~1/4" | 47 ~1/2" | 46" | 37 ~1/4" |
| MFP44VF | 48" | 44" | 35 ~1/4" | 42 ~1/2" | 41" | 32 1/4" |
| MFP39VF | 43" | 39" | 30 ~1/4" | 37 ~1/2" | 36" | 27 1/4" |

* Dimensions are nominal due to grout joint differences. Please refer to instruction manual for framing clearance specifics. The instruction manual can be found at www.Mason-Lite.com/Architects

OPTIONAL MASON-LITE BRICK PANELS



Full Running Bond



Split Herringbone