



TS1207 3 OUTLET **POWERTAP** + 2 USB PORTS

Provides premium fireproof surge protection and convenient **USB** charging

OVERVIEW

The TrickleStar 3-Outlet PowerTap + 2 USB Charging Ports fits over your existing wall outlet to safely power and charge your electronic devices. Designed using intelligent circuitry with built-in voltage sensing, this 540-joule surge protector safeguards electronics from damaging voltage fluctuations, dangerous power spikes, and other surges. Simply plug the surge protector into any grounded outlet, and rest assured that your electronics are protected.


KEY FEATURES

- 3 surge-protected outlets
- 2 USB ports
- 540 Joules of surge protection at 500 VPR
- Consumes <1 watt at all times
- Surge protection LED indicator
- Wall-mount design
- Includes an outlet screw for more permanent applications

PREMIUM FIREPROOF SURGE PROTECTION

Traditional surge protectors use standard Metal Oxide Varistors (MOVs). TrickleStar's surge protectors incorporate advanced surge protection technology with ceramic-encased MOVs, which are capable of suppressing more energy and dissipating heat faster than traditional MOVs. This makes them fireproof during most surges.

The TS1207 has a best-in-class Voltage Protection Rating (VPR), superior mechanical properties, and a lifespan up to three times longer than standard surge protectors, providing the highest degree of protection available.




EMI/RFI NOISE FILTERING

The product includes advanced noise filtering circuitry that reduces electromagnetic interference (EMI) and radio frequency interference (RFI), delivering cleaner power, and improved video and sound quality.

PRODUCT WARRANTIES

- 10 Year Lifetime Product Warranty
- \$500,000 Connected Equipment Warranty

SETUP GUIDE

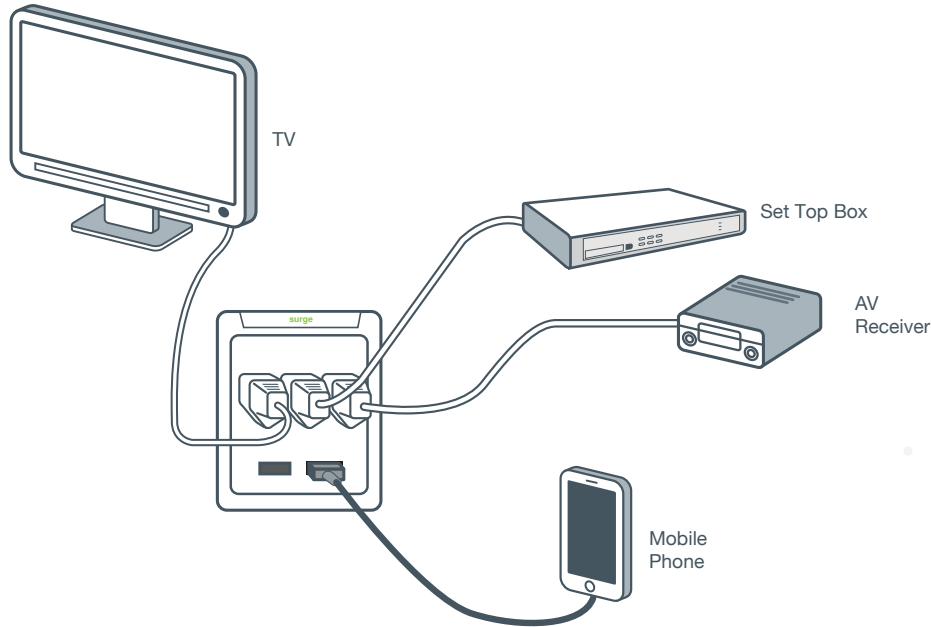

ELECTRICAL SPECIFICATIONS

FOR INDOOR USE ONLY

Voltage	120 VAC +/- 10% 60Hz
Power Rating	15 Amps, 1800 Watts
Surge protection	36,000 Amps / 540 Joules
VPR	L-N 500V, L-G 500V, N-G 500V
Surge Response Time	<1 Nanosecond
Noise Filtering	<40 dB
Standby Power Consumption	<1 Watt
USB Charging Port	5VDC, 2.4A Total

PHYSICAL SPECIFICATIONS

Operating Temperature	32° to 104° F
Storage Temperature	14° to 140° F
Humidity	5 to 90% N/C
IP Rating	IP20

APPROVALS

Conformity to product standards for safety and EMC.

- UL (US & Canada)
 - Standard for Surge Protective Devices, UL 1449, Fourth Edition
- US Department Of Energy (DOE) VI certified

ORDERING INFORMATION

TS1207	3 Outlet PowerTap, 2 USB Port (2.4A), 540J, Black
---------------	--

